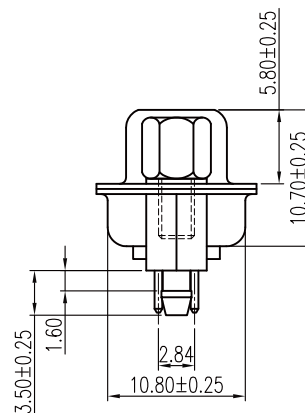
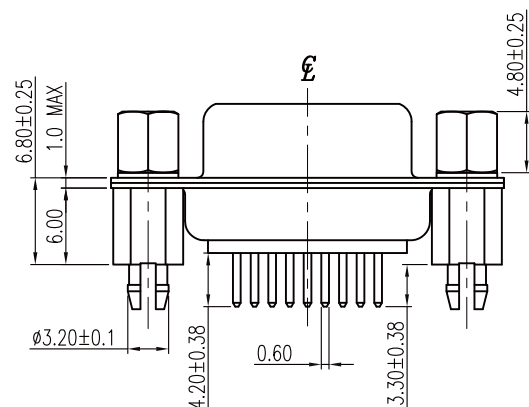
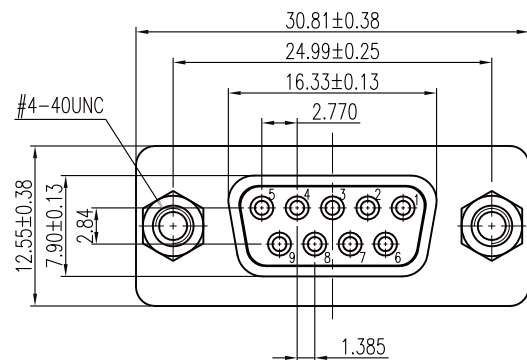


RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION:(A)~(G)

NOTES

1. MATERIAL:
Housing:PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Screw:Copper Alloy.
2. FINISH:
Terminal:Full Gold Plated over Nickel Area.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Screw:Nickel Plated.
3. This Product is RoHs Compliance Product.

SPECIFICATIONS

1. D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 5 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
- 1.6 Total Mating Force: 6.4 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55°C to $+105^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX ± 0.25
.XXX ± 0.13
ANG $\pm 2^{\circ}$



ORDER INFORMATION

DDL-SZJ-09-LF
SERIES T LEADFREE
09 WAY
JACKSCREW
CLIP
FEMALE

DESCRIPTION: D-SUB CONNECTOR STRAIGHT DIP MOUNT