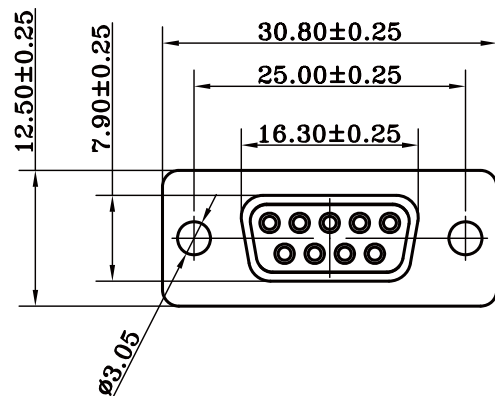


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED

INSULATOR : PBT GF UL 94V-0 , BLACK COLOR

SIGNAL CONTACT : COPPER ALLOY, GOLD FLASH

ELECTRICAL CHARACTERISTICS



SIGNAL CONTACT CURRENT RATING : 5.0 AMPS

SIGNAL CONTACT RESISTANCE : 10 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE :1200 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5000 MEGAOHMS MIN.

TEMPERATURE RATING : -55°C ~ +125°C

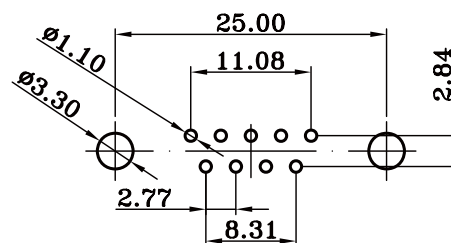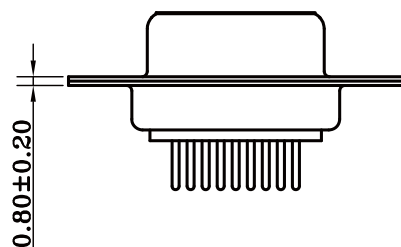

P.C.B LAYOUT

BLANK	Z	N	J

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DDL-Sx-09-LF

SERIES T LEADFREE

09 WAY

BLANK:HOLE

FEMALE Z:CLIP

N:NUT

J:JACKSCREW

DESCRIPTION: