
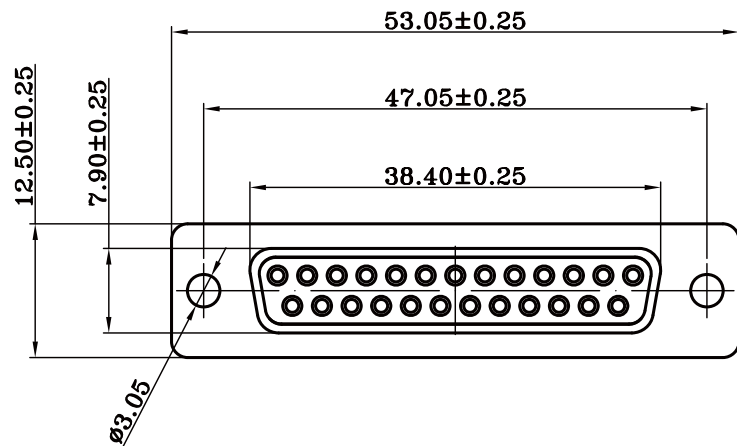
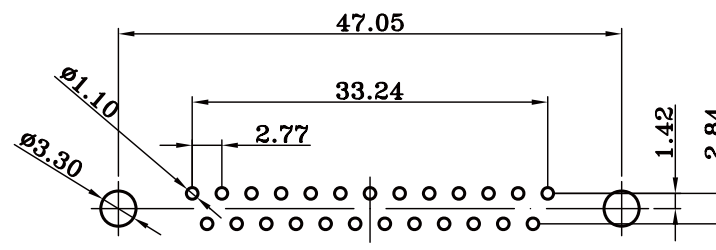


MATERIALS AND FINISH
 SHELL : STEEL MATERIAL, TIN FINISHED
 INSULATOR : PBT GF UL 94V-0 , BLACK COLOR
 SIGNAL CONTACT : COPPER ALLOY, GOLD FLASH

ELECTRICAL CHARACTERISTICS
 SIGNAL CONTACT CURRENT RATING : 5.0 AMPS
 SIGNAL CONTACT RESISTANCE : 10 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE :1200 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +125°C

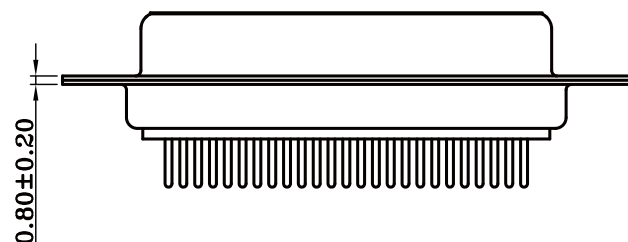

P.C.B LAYOUT

BLANK	Z	N	J

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

DDL-Sx-25-LF
 SERIES T LEADFREE
 25 WAY
 BLANK:HOLE
 FEMALE Z:CLIP
 N:NUT
 J:JACKSCREW

DESCRIPTION: