


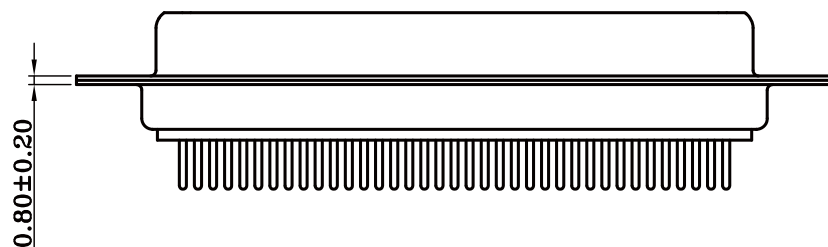


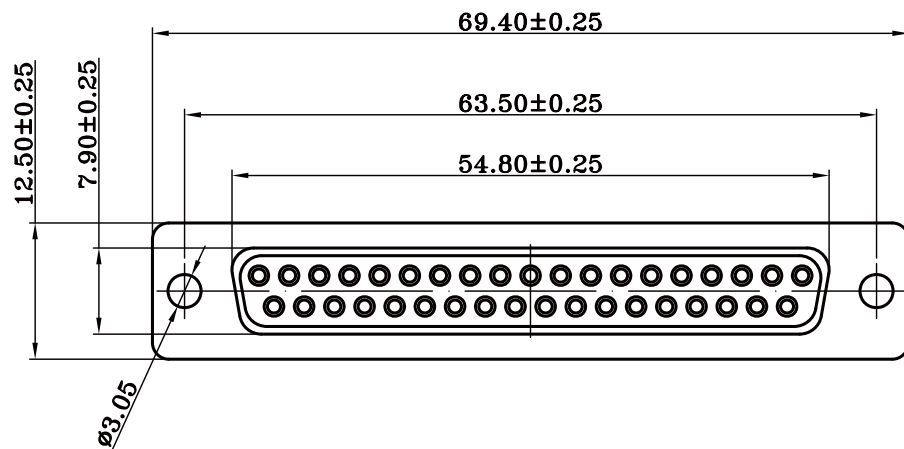

**MATERIALS AND FINISH**  
 SHELL : STEEL MATERIAL, TIN FINISHED  
 INSULATOR : PBT GF UL 94V-0 , BLACK COLOR  
 SIGNAL CONTACT : COPPER ALLOY, GOLD FLASH

**ELECTRICAL CHARACTERISTICS**  
 SIGNAL CONTACT CURRENT RATING : 5.0 AMPS  
 SIGNAL CONTACT RESISTANCE : 10 MILLIOHMS MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE :1200 V AC FOR 1 MINUTE  
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.  
 TEMPERATURE RATING : -55°C ~ +125°C

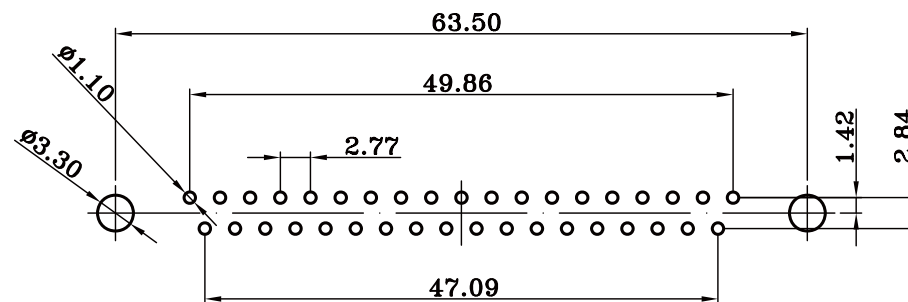

P.C.B LAYOUT

| BLANK | Z | N | J |
|-------|---|---|---|
|       |   |   |   |

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DDL-Sx-37-LF  
 SERIES T LEADFREE  
 37 WAY  
 BLANK:HOLE  
 FEMALE Z:CLIP  
 N:NUT  
 J:JACKSCREW

DESCRIPTION: