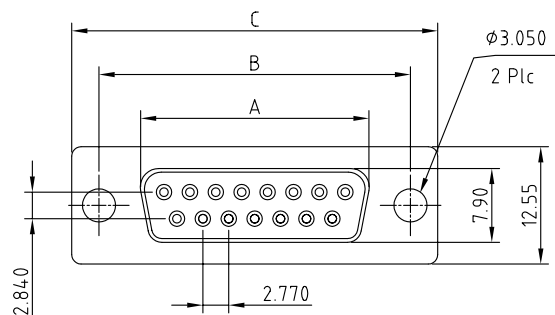


ELECTRICAL CHARACTERISTICS

Contact Current Rating:3Amperes.

Dielectric Withstanding Voltage:AC 500V at sea level.

Insulation Resistance:1000Megohms Min.

Contact Resistance:30Milliohms Max.

Operation Temperature : -55°C to +105°C.

Material

Contact :Copper Alloy.

Insulator:PBT. (Select PA6T /LCP /PA9T)








Shell: SPCC.

Screw: Copper Alloy.

Note:

No.	A	B	C	D
09	16.33	24.99	30.81	19.23
15	24.66	33.32	39.14	27.56
25	38.38	47.04	53.04	41.28
37	54.84	63.50	69.32	57.33

Recommend Layout PCB.

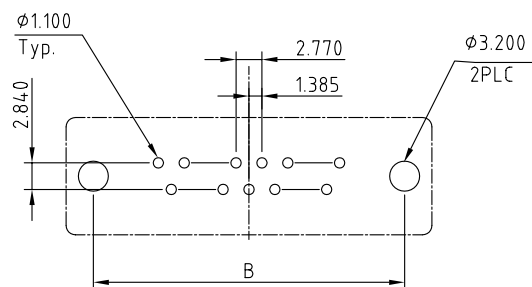

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DDL-Sxx-xx-LF
SERIES T LEADFREE
09~37WAY
N:NUT
NH:NUT+HEX SCREW
J:JACKSCREW
Z:CLIP
ZJ:CLIP+JACKSCREW

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

DESCRIPTION: