

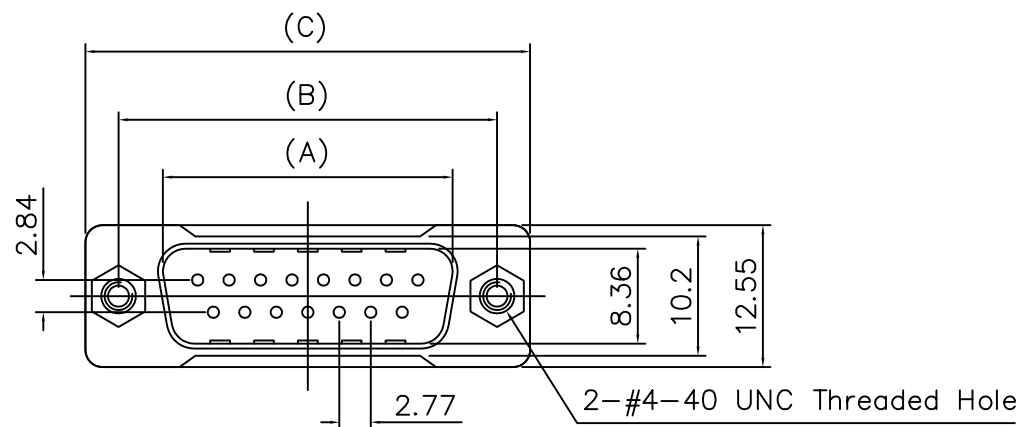


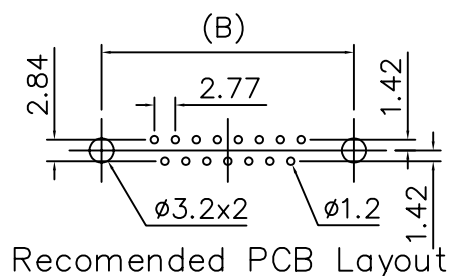

Specifications

Contact Resistance: 30m max. at DC
100mA
Insulator Resistance: 1000M min. at DC
500V
Current Rating: 5 AMP
Dielectric Withstanding
Voltage: AC 1000V For 1 minute
Operating Temperature: -55°C ~ +105°C
Contact: Brass
Housing: PBT & 30% Glass Fiber (UL
94V-0)

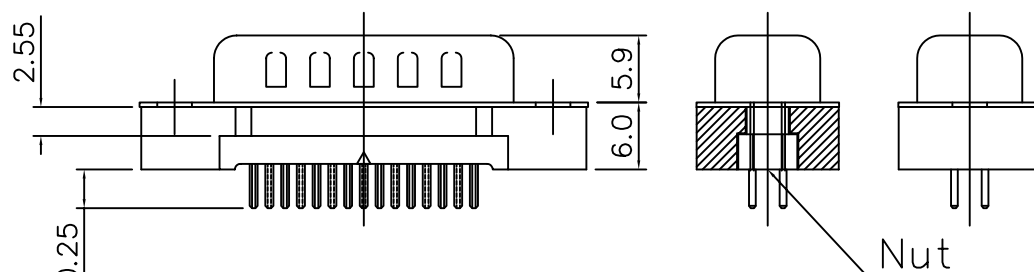

Dimension

Positon	A	B	C
9	16.92	24.99	30.81
15	25.50	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.10
.XX ± 0.05
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DDM-PN-xx-LF
SERIES T LEADFREE
09~37WAY
NUT
MALE

DESCRIPTION: D-SUB DIP STRAIGHT TYPE W/O METAL REAT SHELL