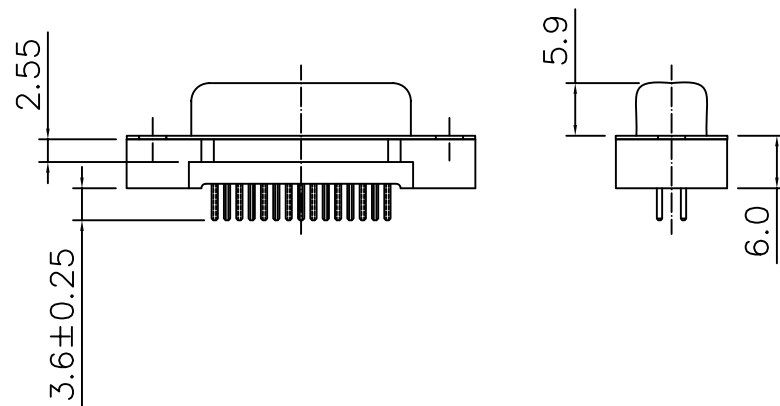
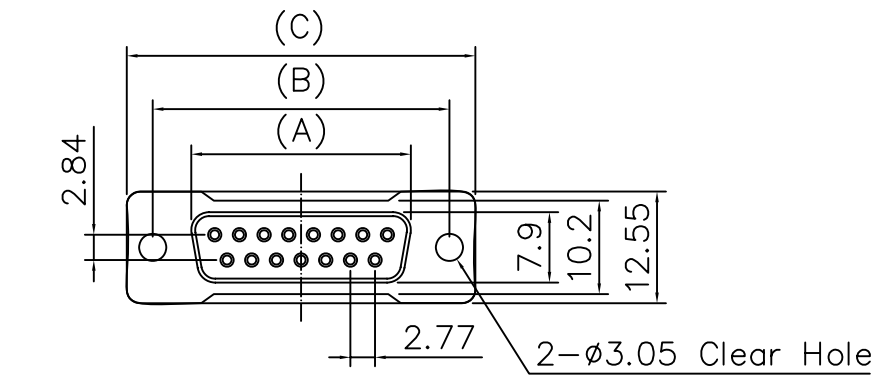


Recomended PCB Layout

Specifications

Contact Resistance: 30mΩmax. at DC
100mA

Insulator Resistance: 1000MΩmin. at DC
500V

Current Rating: 7 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature: -55°C ~ +105°C

Contact: Brass

Housing: PBT & 30% Glass Fiber (UL
94V-0)

Dimension

Positon	A	B	C
9	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DDM-S-xx-LF
SERIES | T LEADFREE
09~37WAY
FEMALE

DESCRIPTION: D-SUB DIP STRAIGHT TYPE W/O
METAL REAR SHELL