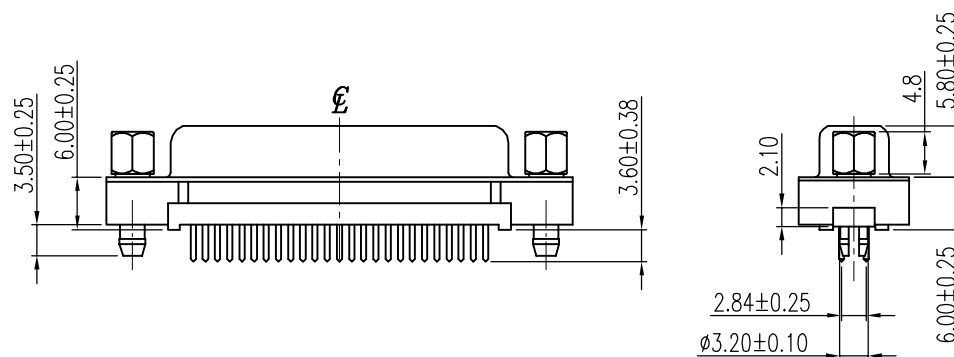
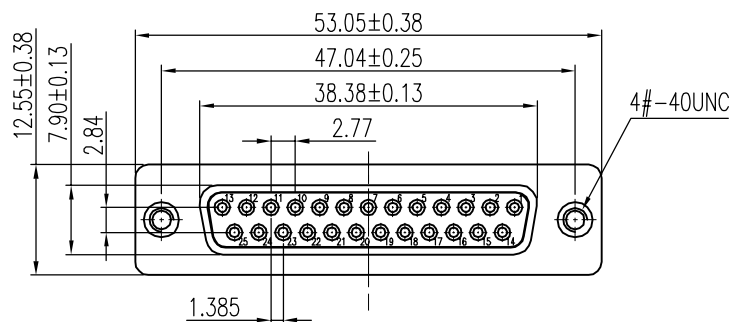


RECOMMENDED P.C.B LAYOUT

1. Material And Finish:

Housing: PBT, UL94V-0, Black

Terminal: Copper Alloy, Gold Plated On Contact Area.
in Plated On Solder Area.
Nickel Underplated Overall.

Shell: SPCC, Nickel Plated.

Boardlock: Copper Alloy, Tin Plated.

2. Specification:

Voltage: 250 VAC(RMS) Max.

Current Rating: 3 Ampere per Contact

Contact Resistance: 25 Milliohms Max.

Insulation Resistance: 5000 Megohms Min.

Dielectric Withstanding Voltage: 1000 VAC(RMS)

Total Mating Force: 9.4 Kgf Max.

Total Unmating Force: 1.4 Kgf Min.

Operating Temperature: -55°C to +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

照片框

ORDER INFORMATION

DDM-SZNJ-25-LF
SERIES T T T T LEADFREE
25 WAY
JACKSCREW
NUT
CLIP
FEMALE

DESCRIPTION: D-SUB 180°,DIP TYPE,25 PIN ,FEMALE, WITH SCREW & BOARD