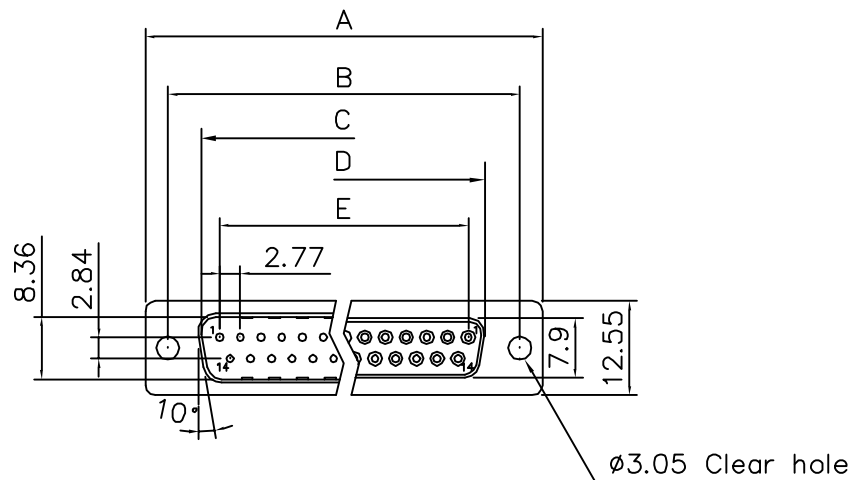


Recomended PCB Layout

Product Specification

Material

Insulator :Glass-Filled Thermoplastic PBT,UL94V-0 rated

Contact :Brass

Shell : Steel, 100u" Tin Over 50u" min Copper

Clinch Nut: Brass, 100u" min Nickel Plated.

Boardlock :Brass, 100u" min Tin Plated.

Screwlock :Brass, 100u" min Nickel Plated.

Electrical

Contact Resistance :20 milliohms

Max at 1 AMP DC.

Insulation Resistance :1000

magohms at 500 VDC



Dielectric Withstanding Voltage :

1000 VAC/rms 60Hz for 1 minute



Current Rating :3 AMP

Volatge Rating :250 VAC/rms 60Hz



N



ZN



NJ



Dimensions

Positions	A	B	C	D	E
9	30.81	24.99	16.92	16.33	11.08
15	39.20	33.30	25.25	24.70	19.39
25	53.05	47.04	38.96	38.40	33.24
37	69.40	63.50	55.42	54.80	49.86

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.38

.X ± 0.25

.XX ± 0.13

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DDM-xyy-xx-LF
SERIES T LEADFREE
09~37WAY
N:NUT
ZN:CLIP+NUT
NJ:NUT JACKSCREW
P:MALE
S:FEMALE

DESCRIPTION: