

MATERIALS

Contact :Phosphor Bronze, Nickel-Undercoated,
Selective Gold-Plated

Insulator :Nylon-46 (UL94V-0), Black

Shell :Steel, Copper-Undercoated,
Nickel or Tin Plated

CHARACTERISTICS






Current Rating :5Amps

Insulation Resistance :5000M Ω Min. at 500V DC

Contact Resistance :20m Ω Max. at DC 100mA

Temperature Range :−55°C to +105°C

Max Processing Temperature : 210°C For 30~60
Seco₀nds

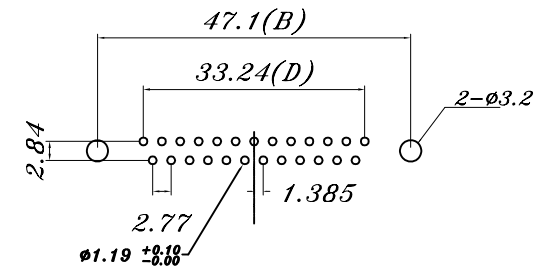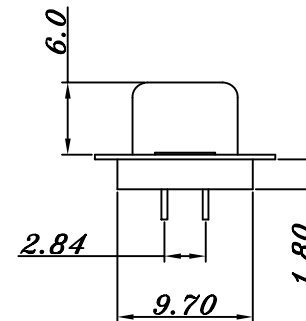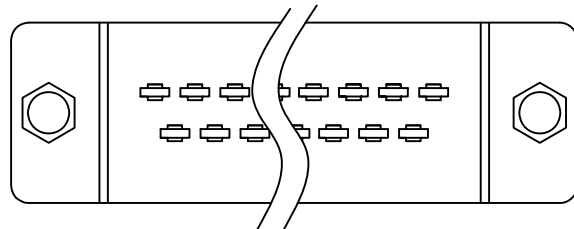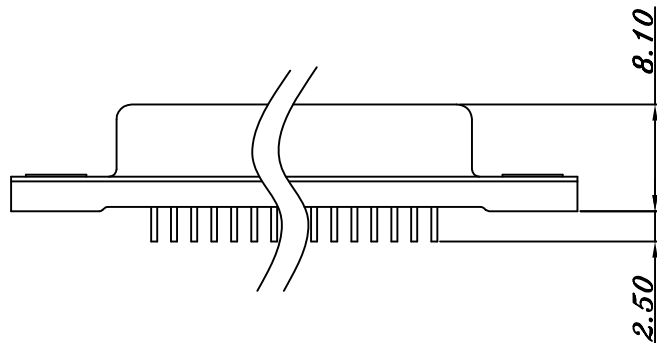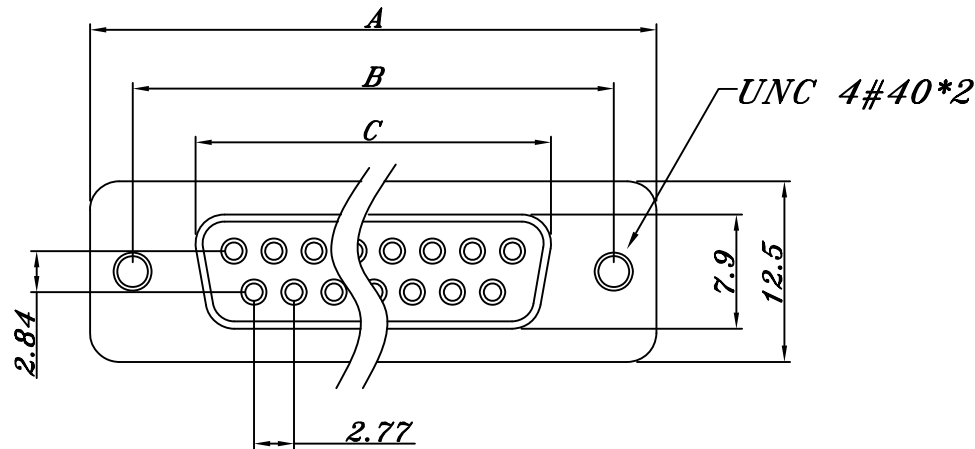

P.C. Board Layout

POSITION	A	B	C	D
9	30.8	25.00	16.30	11.08
15	39.2	33.30	24.60	19.39
25	53.1	47.10	38.30	33.24

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.10
.XXX $\pm$ 0.05
ANG $\pm$

照片框

ORDER INFORMATION

DDM2-SN-xx-LF

SERIES T LEADFREE
09~25WAY
NUT
FEMALE

DESCRIPTION: