


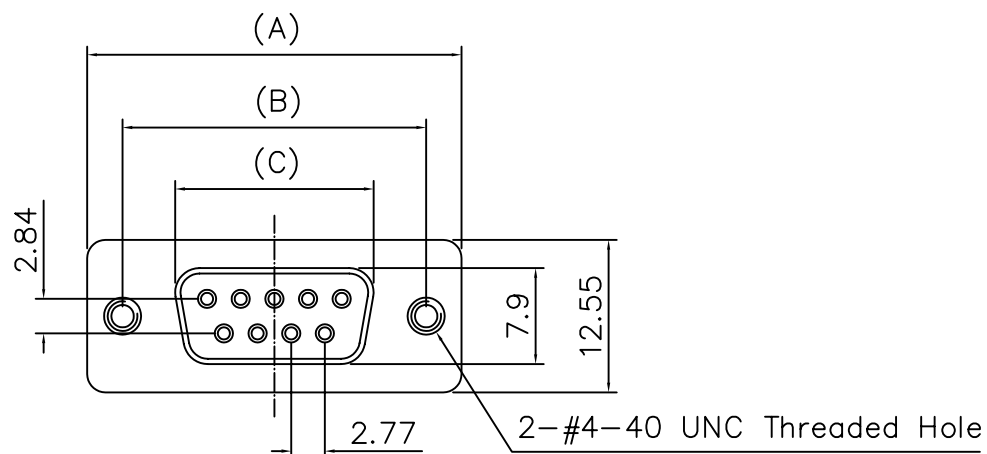

Specifications

Contact Resistance: $\leq 30\text{m}$ max. at DC
100mA

Insulator Resistance: $\geq 1000\text{M}$ min. at DC
500V

Current Rating: 5 AMP





Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature: $-55^{\circ}\text{C} \sim +235^{\circ}\text{C}$

Contact: PHOSPHOR BRONZE

Housing: NYLON 6T

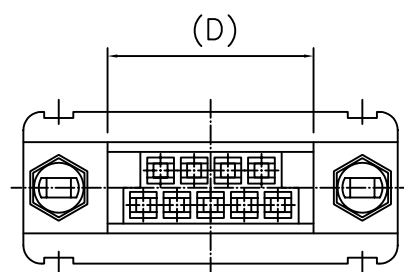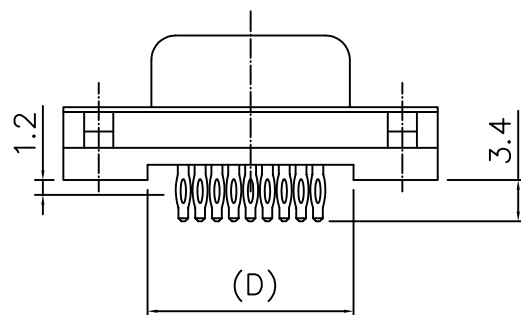

Dimension

Positon	A	B	C	D
09	30.81	24.99	16.33	16.96
15	39.14	33.32	24.66	25.18
25	53.04	47.04	38.38	39.12
37	69.32	63.50	54.84	55.68

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm 1^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

DDP-SN-xx-LF
SERIES | LEADFREE
09~37WAY
NUT
FEMALE

DESCRIPTION: D-SUB FEMALE STRAIGHT PRESS-FIT TYPE