

RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

SPECIFICATION

MATERIAL

Insulator: Thermail Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u" Nickel

Contact Area: 1u"~30u" Selective gold

⚠ Solder Tails Area: 100u" Tin/Lead (Brighten Tin) or
100u" Tin/Lead Free (Brighten Tin/Matte Tin)

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating: 3 Amps Max.


Contact Resistance: 20 mohms Max.

Insulation Resistance: 3000 Mohms Min @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / Minute

Operating Temperature: -55°C To $+125^{\circ}\text{C}$

POSITION	A	B	C	D
09	16.35	24.99	30.81	18.61
15	24.70	33.32	39.25	27.15
25	38.40	47.04	53.03	40.93
37	54.80	63.50	69.50	57.40

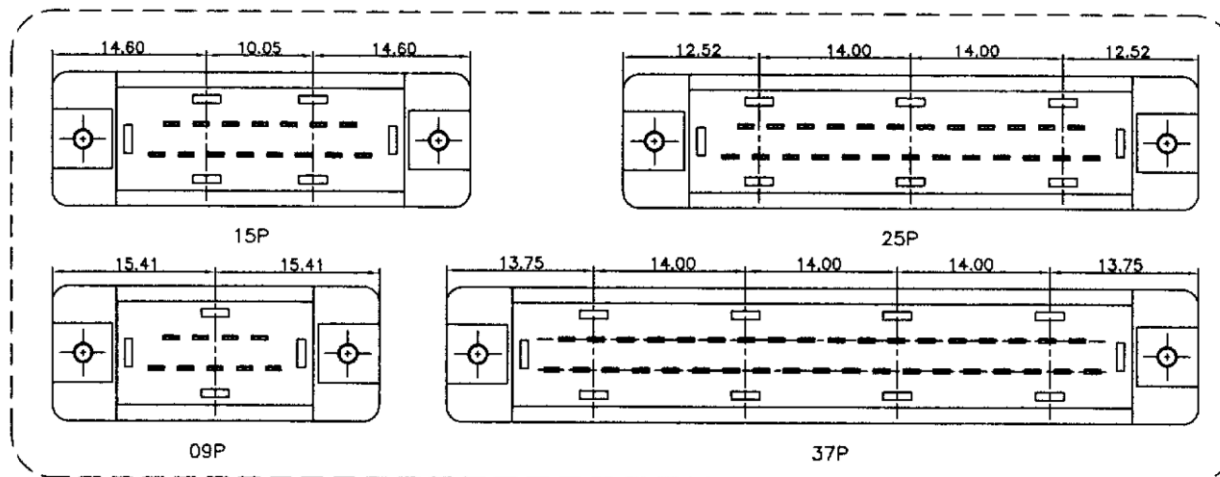

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.50

.X, ± 0.30

.XX, ± 0.20

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DDP-SNJ-xx-LF
SERIES | | | LEADFREE
| | | 09~37 WAY
| JACKSCREW
| NUT
| FEMALE

DESCRIPTION: