




2x02P



2x03P










2x04~2x20P

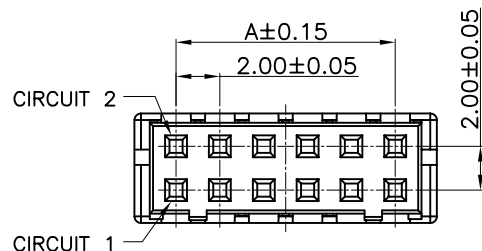

NOTES:

1. MATERIAL(HALOGEN FREE): NYLON 66 UL 94V-0 (BLACK)



Pin	DIM. (mm)			Pcs/Bag	Pin	DIM. (mm)			Pcs/Bag
	A	B	C			A	B	C	
2x02	-	4.40	5.80	1,000	2x12	22.00	24.40	25.80	1,000
2x03	4.00	6.40	7.80	1,000	2x13	24.00	26.40	27.80	1,000
2x04	6.00	8.40	9.80	1,000	2x14	26.00	28.40	29.80	1,000
2x05	8.00	10.40	11.80	1,000	2x15	28.00	30.40	31.80	1,000
2x06	10.00	12.40	13.80	1,000	2x16	30.00	32.40	33.80	1,000
2x07	12.00	14.40	15.80	1,000	2x17	32.00	34.40	35.80	1,000
2x08	14.00	16.40	17.80	1,000	2x18	34.00	36.40	37.80	1,000
2x09	16.00	18.40	19.80	1,000	2x19	36.00	38.40	39.80	1,000
2x10	18.00	20.40	21.80	1,000	2x20	38.00	40.40	41.80	1,000
2x11	20.00	22.40	23.80	1,000					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X ± 0.30
X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ± 3°

照片框

ORDER INFORMATION

DF11-H-2Xxx-LF

SERIES LEADFREE
2X02:02WAY
2X20:40WAY
HOUSING

DESCRIPTION: WIRE TO BOARD, PLUG, PITCH 2.00mm, CRIMP TYPE, INSULATOR