
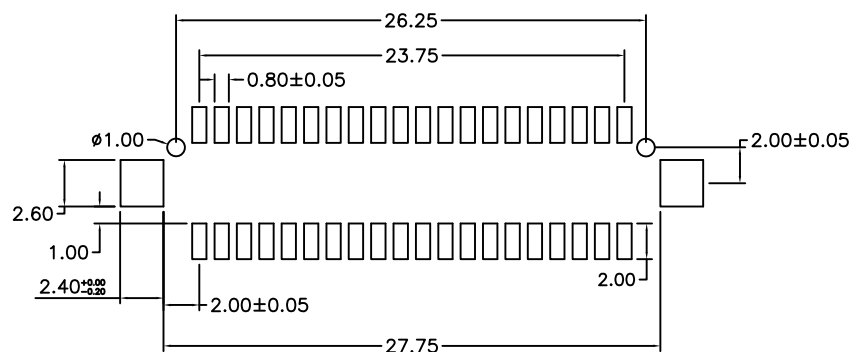
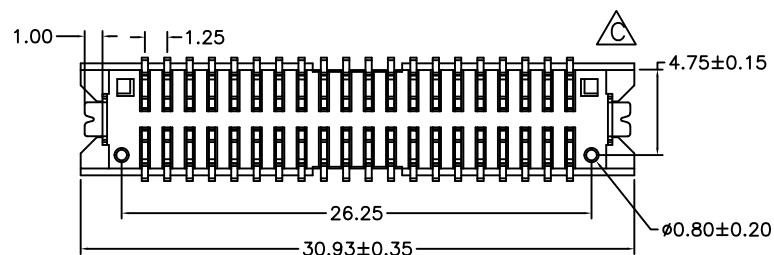

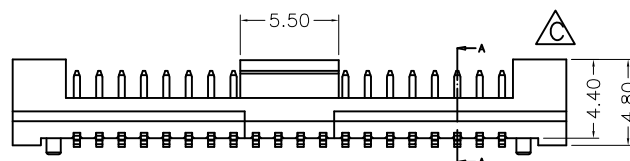


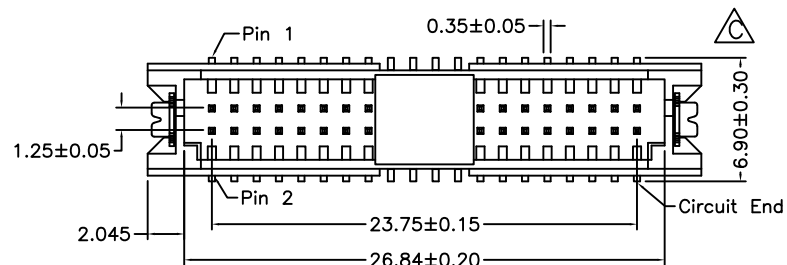

Recommended P.C.B Layout

SPECIFICATION

Pitch Between Poles : 1.25mm
 Current Rating : 1A AC/DC
 Voltage Rating : 100V AC/DC
 Contact Resistance : 20mΩMax
 Insulation Resistance : 500MΩMin.
 Withstand Voltage : 500V AC/MINUTE
 Temperature Range : -25°C to +85°C

FEATURES

Material : NYLON 6T UL94V-0
 Contact : 0.35mm(.014") Flat Pin,
 Phosphor Bronze, Gold Flash
 Mates With Tu1257 Series Dual Row Housing

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

DF13-VP GC-2X20-LF
 SERIES | | | LEADFREE
 180°SMT | | 40 WAY
 | CAP
 | GOLD
 | POST

DESCRIPTION: 1.25mm WIRE TO BOARD CONNECTOR, CAP+TAPE REEL

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com