

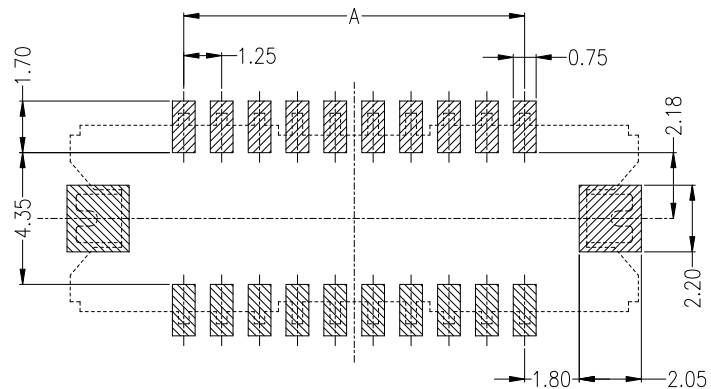
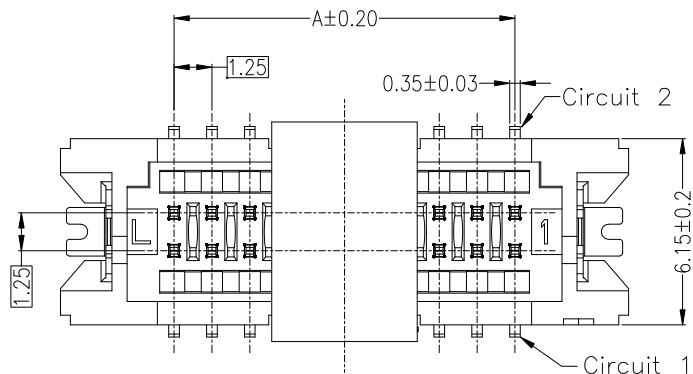
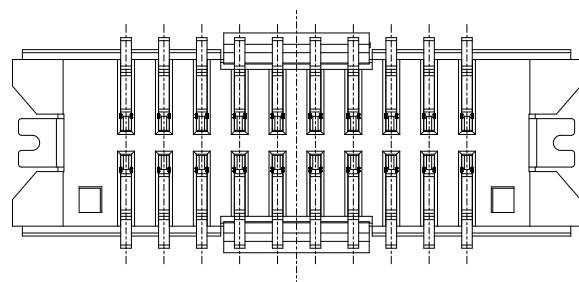





SUGGESTED PCB LAYOUT

Specifications:
 Poles: 10 to 50
 Contact resistance: $\leq 30\text{m}\Omega$
 Insulation resistance: $\geq 500\text{M}\Omega$
 Rated voltage: 150V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Housing: PA9T UL94V-0, Natural(Beige)
 CAP: PA9T UL94V-0, Natural(Beige)
 Contacts: Brass/Sn-plated
 Solder Tabs: Brass/Sn-plated

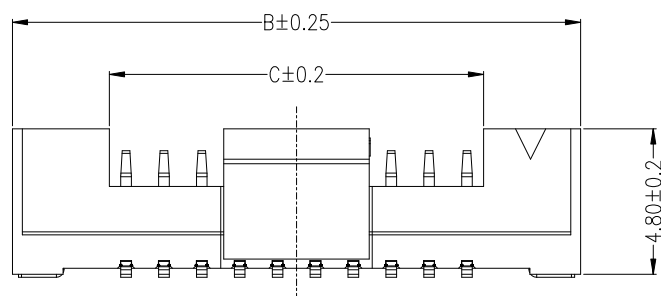

Circuits	Dimensions (mm)		
	A	B	C
2x05P	5.00	12.50	6.10
2x10P	11.25	18.75	12.35
2x15P	17.50	25.00	18.60
2x20P	23.75	31.25	24.85
2x25P	30.00	37.50	31.10

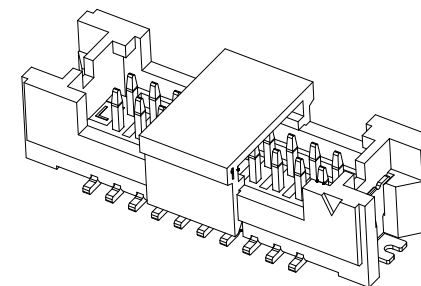

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DF13-VXC-2Xxx-LF

SERIES LEADFREE
 2X05:10WAY
 2X25:50WAY
 CAP
 NON POST
 180°SMT

DESCRIPTION: 1.25 Pitch Wafer 180° SMT