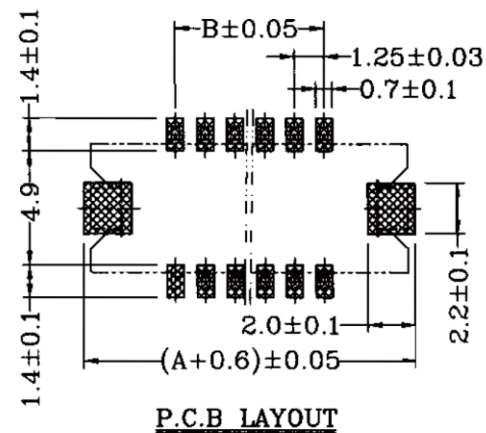
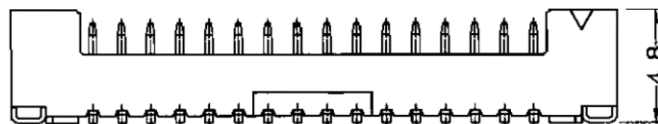
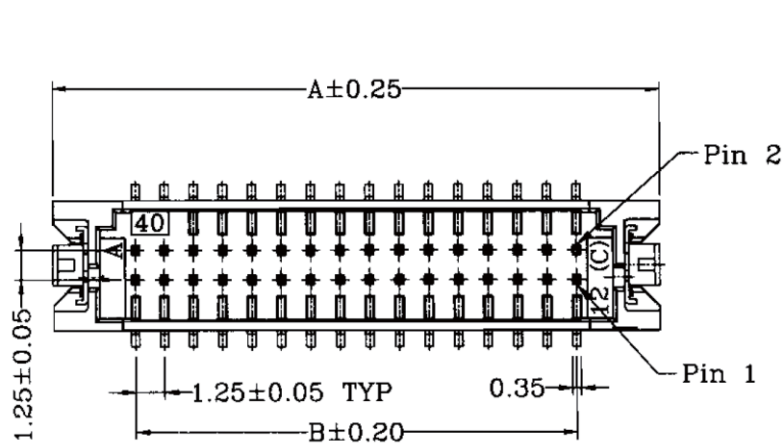


#### Dimensional Information:

| Circuits | Dimensions |       | Qty/Reel | Circuits | Dimensions |       | Qty/Reel |
|----------|------------|-------|----------|----------|------------|-------|----------|
|          | A          | B     |          |          | A          | B     |          |
| 4        | 8.35       | —     | 1000     | 24       | 20.85      | 13.75 | 1000     |
| 6        | 9.60       | 2.50  | 1000     | 26       | 22.10      | 15.00 | 1000     |
| 8        | 10.85      | 3.75  | 1000     | 28       | 23.35      | 16.25 | 1000     |
| 10       | 12.10      | 5.00  | 1000     | 30       | 24.60      | 17.50 | 1000     |
| 12       | 13.35      | 6.25  | 1000     | 32       | 25.85      | 13.75 | 1000     |
| 14       | 14.60      | 7.50  | 1000     | 34       | 27.10      | 15.00 | 1000     |
| 16       | 15.85      | 8.75  | 1000     | 36       | 28.35      | 16.25 | 1000     |
| 18       | 17.10      | 10.00 | 1000     | 38       | 29.60      | 17.50 | 1000     |
| 20       | 18.35      | 11.25 | 1000     | 40       | 30.85      | 17.50 | 1000     |
| 22       | 19.60      | 12.50 | 1000     |          |            |       |          |

#### Material:

- \* Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
- \* Contact Post: Phosphor Bronze, Matte Tin Plated.
- \* Solder Tab: 0.20mm<sup>t</sup> Brass, Matte Tin Plated.

#### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框


#### ORDER INFORMATION

DF13-VXCR-2Xxx-LF  
SERIES | | | | LEADFREE  
2X02:04WAY  
2X20:40WAY  
180°SMT | REEL  
CAP  
NON POST

DESCRIPTION:


# TAPING SPECIFICATIONS

Feeding Direction

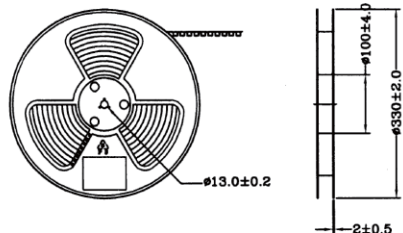





4 to 14 circuits

Feeding Direction

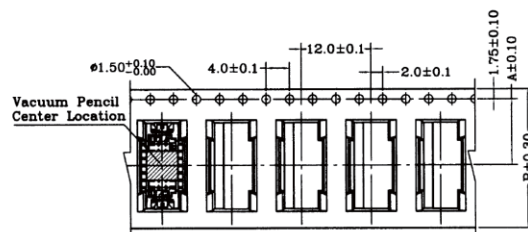

16 to 40 circuits

Feeding Direction

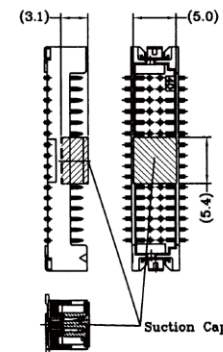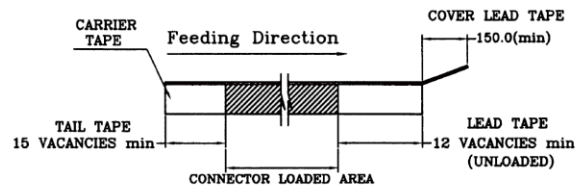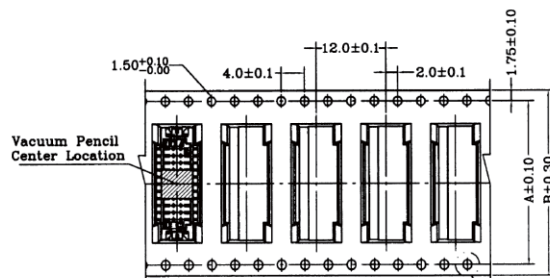

| Circuits | Dimensions |       | Qty/Reel |
|----------|------------|-------|----------|
|          | A          | B     |          |
| 4        | 11.50      | 24.00 | 1000     |
| 6        | 11.50      | 24.00 | 1000     |
| 8        | 11.50      | 24.00 | 1000     |
| 10       | 11.50      | 24.00 | 1000     |
| 12       | 11.50      | 24.00 | 1000     |
| 14       | 11.50      | 24.00 | 1000     |
| 16       | 28.40      | 32.00 | 1000     |
| 18       | 28.40      | 32.00 | 1000     |
| 20       | 28.40      | 32.00 | 1000     |
| 22       | 28.40      | 32.00 | 1000     |
| 24       | 40.40      | 44.00 | 1000     |
| 26       | 40.40      | 44.00 | 1000     |
| 28       | 40.40      | 44.00 | 1000     |
| 30       | 40.40      | 44.00 | 1000     |
| 32       | 40.40      | 44.00 | 1000     |
| 34       | 40.40      | 44.00 | 1000     |
| 36       | 40.40      | 44.00 | 1000     |
| 38       | 40.40      | 44.00 | 1000     |
| 40       | 40.40      | 44.00 | 1000     |

RoHS Compliant

TOLERANCES ARE

X, ±  
X, ±  
.XX ±  
.XXX ±  
ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DF13-VXCR-2Xxx-LF

SERIES  
180°SMT  
REEL  
CAP  
NON POST  
LEADFREE  
2X02:04WAY  
2X20:40WAY

DESCRIPTION:

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com