


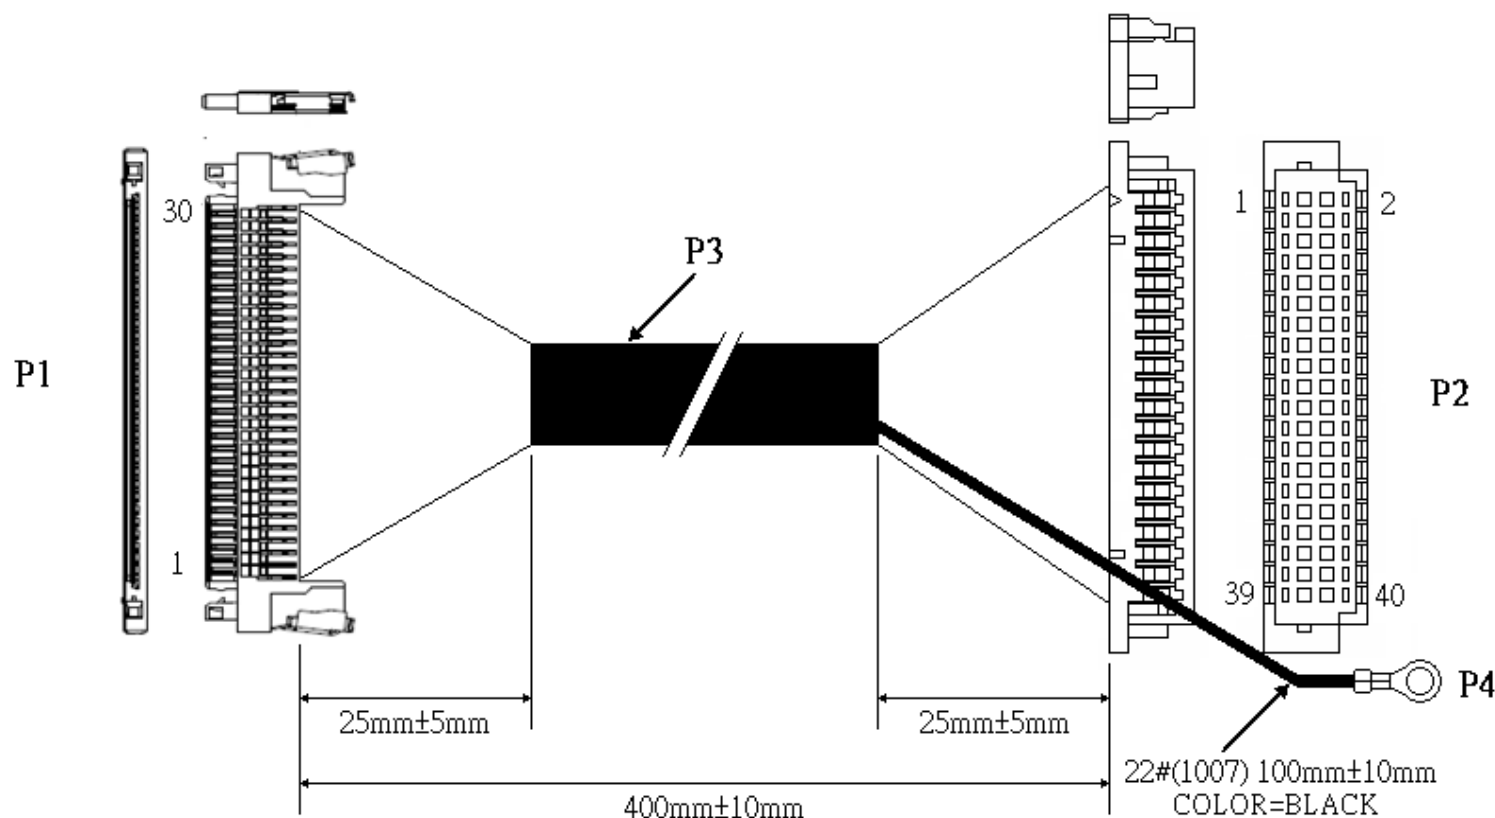

| PIN OUT |          |
|---------|----------|
| P1      | P2 COLOR |
| 1       | 9 BLUE   |
| 2       | 10 WHITE |
| 3       | 11 BLUE  |
| 4       | 12 WHITE |
| 5       | 13 BLUE  |
| 6       | 14 WHITE |
| 7       | 8 BLACK  |
| 8       | 15 BLUE  |
| 9       | 16 WHITE |
| 10      | 21 BLACK |
| 11      | 17 BLUE  |
| 12      | 18 WHITE |
| 13      | 19 BLUE  |
| 14      | 20 WHITE |
| 15      | 22 BLACK |
| 16      | 25 BLUE  |
| 17      | 26 WHITE |
| 18      | 27 BLUE  |
| 19      | 28 WHITE |
| 20      | 29 BLUE  |
| 21      | 30 WHITE |
| 22      | 23 BLACK |
| 23      | 31 BLUE  |
| 24      | 32 WHITE |
| 25      | 24 BLACK |
| 26      | 33 BLUE  |
| 27      | 34 WHITE |
| 28      | 35 BLUE  |
| 29      | 36 WHITE |
| 30      |          |

1. P1 : 1.0mm PITCH CRIMP TERMINAL AND HOUSING FIX-HL-30 or EQUIVALENT
2. P2 : 1.25mm PITCH CRIMP TERMINAL AND HOUSING DF13-H-2X20 or EQUIVALENT
3. P3 : ACETATE CLOTH TAPE (OUTSIDE) COLOR=BLACK + EXPANDABLE SLEEVING IN COPPER BRAID (INSIDE)
4. P4 : RING TERMINAL Ø 3.2×6.0mm TIN PLATED CRIMP ON WIRE UL(1007) 22AWG 80°C 300V BLACK PVC JACKET
5. WIRE IS UL(1571) 30AWG 80°C 30V PVC JACKET

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DF13FIXLRT-B2030322230-A40C

SERIES

400mm

FEMALE TO MALE

22,30 AWG

40 TO 30 TO 3.2Ø WAY

DESCRIPTION: WIRE HARNESS