
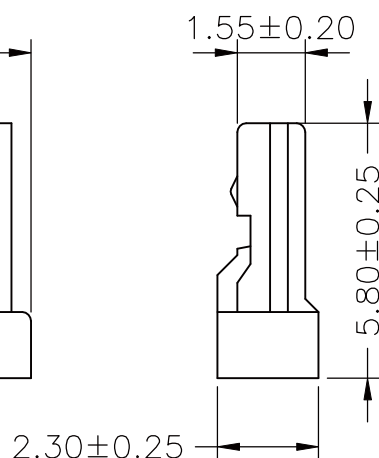
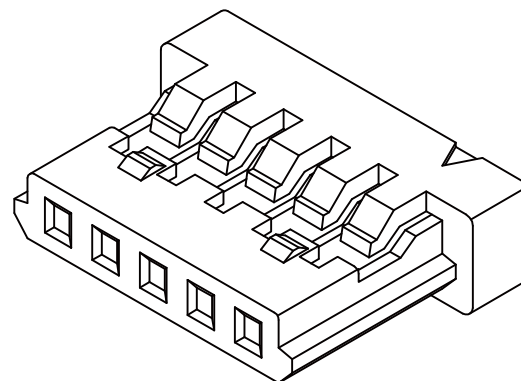
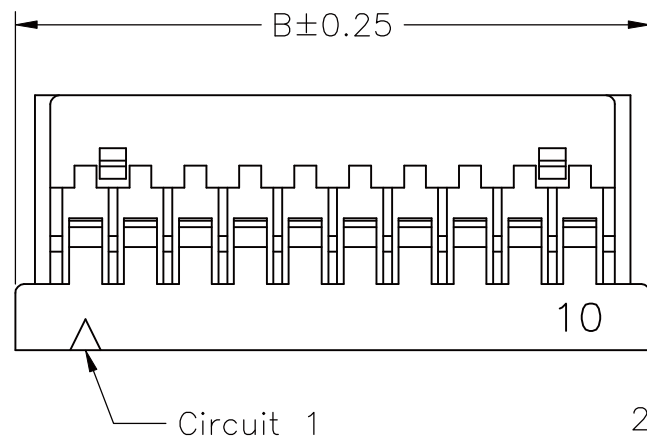


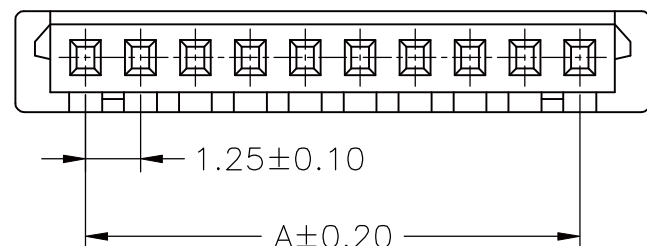

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
DF14-H-02	1.25	4.45
DF14-H-03	2.50	5.70
DF14-H-04	3.75	6.95
DF14-H-05	5.00	8.20
DF14-H-06	6.25	9.45
DF14-H-07	7.50	10.70
DF14-H-08	8.75	11.95
DF14-H-09	10.00	13.20
DF14-H-10	11.25	14.45
DF14-H-11	12.50	15.70
DF14-H-12	13.75	16.95
DF14-H-13	15.00	18.20
DF14-H-14	16.25	19.45
DF14-H-15	17.50	20.70
DF14-H-20	23.75	26.95
DF14-H-25	30.00	33.20
DF14-H-30	36.25	39.45

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1:1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

DF14-H-xx-LF
SERIES | LEADFREE
02~30 WAY
HOUSING

DESCRIPTION: 1.25mm PITCH HOUSING ULTRA LOW PROFILE