


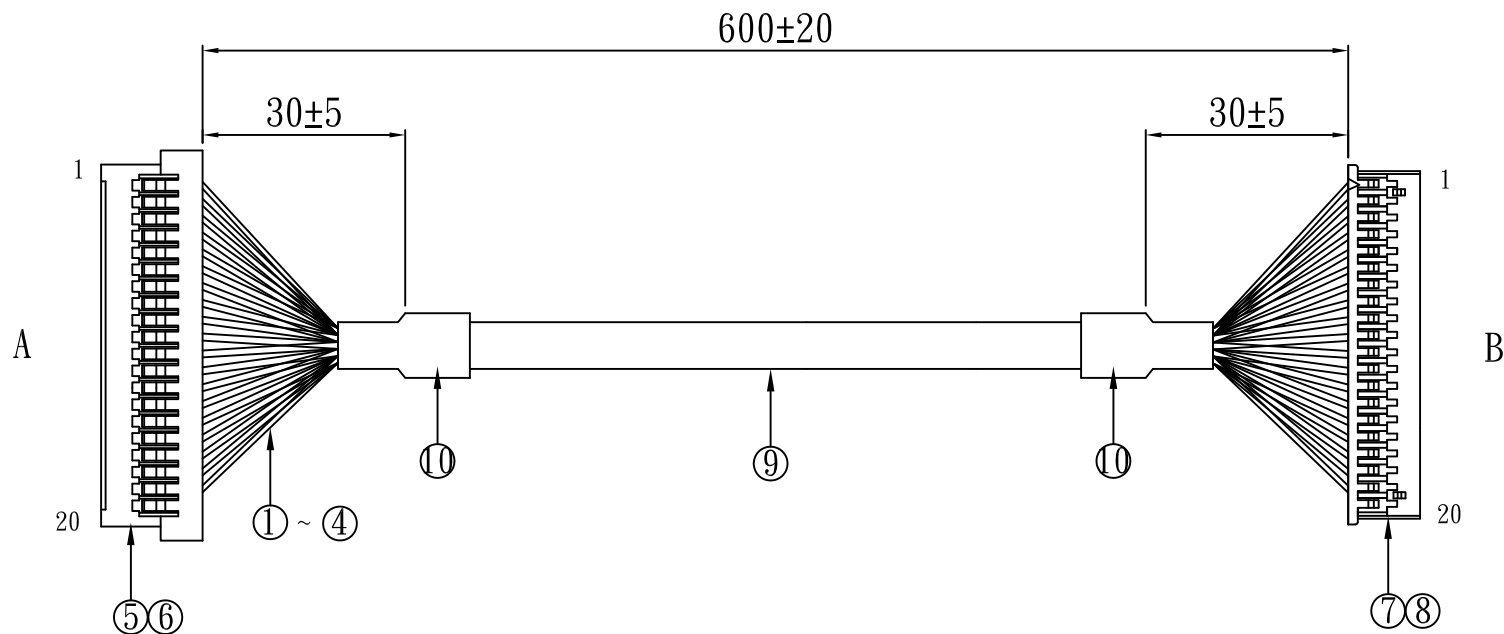

A	線色	B
1	RED	1
2	RED	2
3	BLACK	3
4	BLACK	4
Twist	5 BLUE	5
Twist	6 WHITE	6
Twist	7 BLACK	7
Twist	8 BLUE	8
Twist	9 WHITE	9
Twist	10 BLACK	10
Twist	11 BLUE	11
Twist	12 WHITE	12
Twist	13 BLACK	13
Twist	14 BLUE	14
Twist	15 WHITE	15
Twist	16 BLACK	16
Twist	17 BLUE	17
Twist	18 WHITE	18
Twist	19 BLACK	19

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL1571 #28 OD:0.8 RED	2PCS	E108485
2	WIRE:	UL1571 #28 OD:0.8 BLACK	7PCS	E108485
3	WIRE:	UL1571 #28 OD:0.8 BLUE	5PCS	E108485
4	WIRE:	UL1571 #28 OD:0.8 WHITE	5PCS	E108485
5	HOUSING:	FI-H-20	1PCS	E186792
6	TERMINAL:	FI-TG-28	19PCS	E186792
7	HOUSING:	DF14-H-20	1PCS	E186792
8	TERMINAL:	DF14-T-28	19PCS	E186792
9	NYLON BRAID:	6Φ*545mm BLACK	1PCS	
10	ACETATE CLOTH TAPE:	W : 20*L40mm	2PCS	
11				

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DF14FI-202028TB1-F60C-LF

SERIES

TUBE

28 AWG

20 TO 20 WAY

LEADFREE

600mm

FEMALE

DESCRIPTION: CABLE ASS'Y