
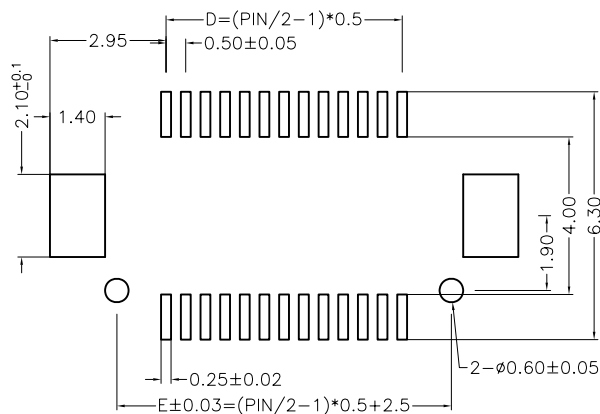
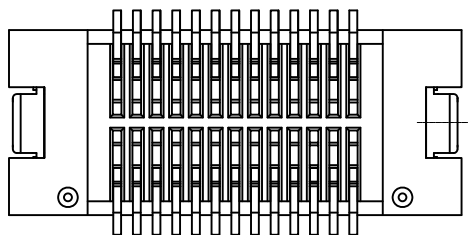
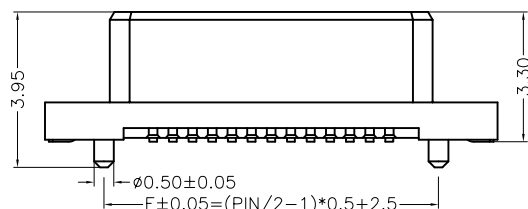



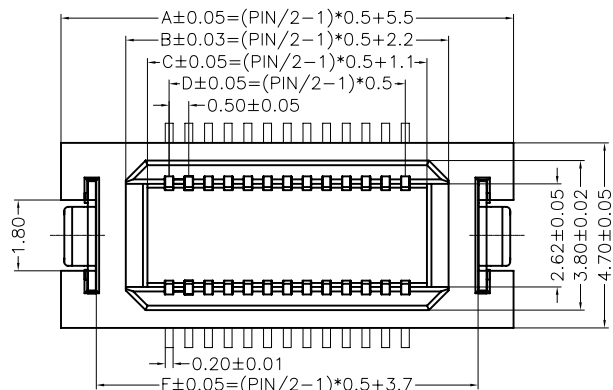

PCB MOUNTING LAYOUT


Specifications

1. Current Rating : 0.5A AC/DC
2. Voltage Rating : 50V AC/DC
3. Contact Resistance : 30m ohm. max.
4. Insulation Resistance : 100M ohm. min.at 100V DC
5. Withstanding Voltage : 100V AC for one minute
6. Operating Temperature Range : -20° C to +105° C

Material and Plating

- 1.Housing : LCP (Natural Color)UL94V-0
- 2.Contact : Phosphor Bronze
- 3.Plating : Gold Flash

Number Of Connectors: 120pcs/Reel

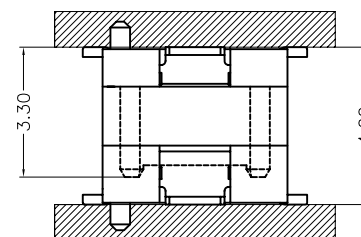

Mating Draw

25.00	21.70	20.60	19.50	22.00	23.20	80P
22.50	19.20	18.10	17.00	19.50	20.70	70P
20.00	16.70	15.60	14.50	17.00	18.20	60P
17.50	14.20	13.10	12.00	14.50	15.70	50P
15.00	11.70	10.60	9.50	12.00	13.20	40P
12.50	9.20	8.10	7.00	9.50	10.70	30P
11.50	8.20	7.10	6.00	8.50	9.70	26P
10.00	6.70	5.60	4.50	7.00	8.20	20P
DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	DIM.F	N(PIN)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DF17-P10A-xxx-LF

SERIES

LEADFREE

020~080 WAY

POST+EAR

UNMATED HIGH 1.0mm

MALE

DESCRIPTION: 0.5 Board To Board Male 3.3mm High With Metal Tab