
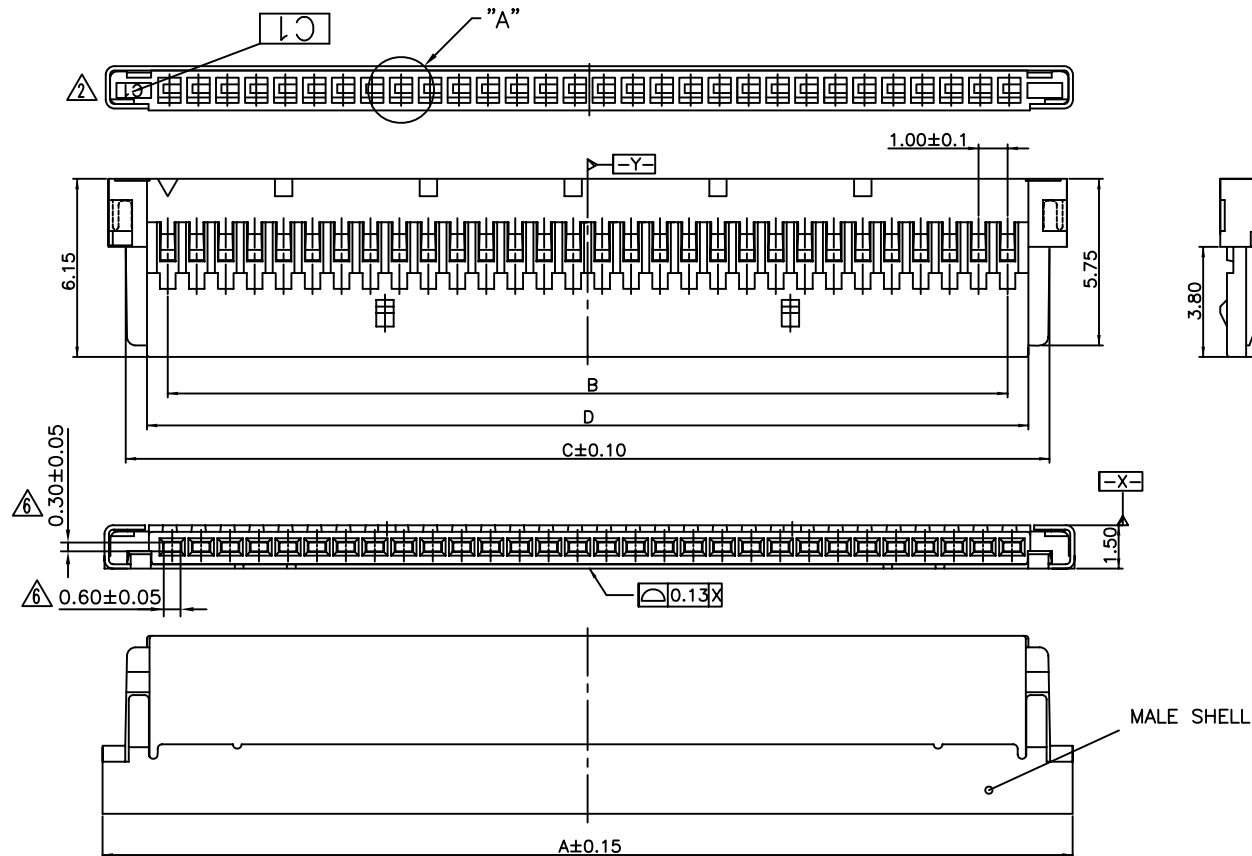


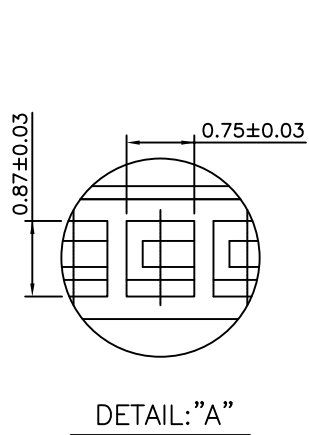

NOTES:

1. INSULATOR: NYLON46, UL94V-0
2. METAL SHELL: COPPER ALLOY, TIN PLATED OVER NICKEL
3. FLASH: 0.13mm MAX

		△	△	
30	33.50	29.00	31.90	30.44
20	23.50	19.00	21.90	20.44
14	17.50	13.00	15.90	14.44
08	11.50	7.00	9.90	8.44
CKT.	A	B	C	D

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.35


.X ± 0.25

.XX ± 0.15

.XXX ± 0.05

ANG ± 3°

PPOJECTION



ORDER INFORMATION

DF19-HM-xx-LF

SERIES T LEADFREE
08~30WAY
METAL
HOUSING

DESCRIPTION: