


DESCRIPTION:

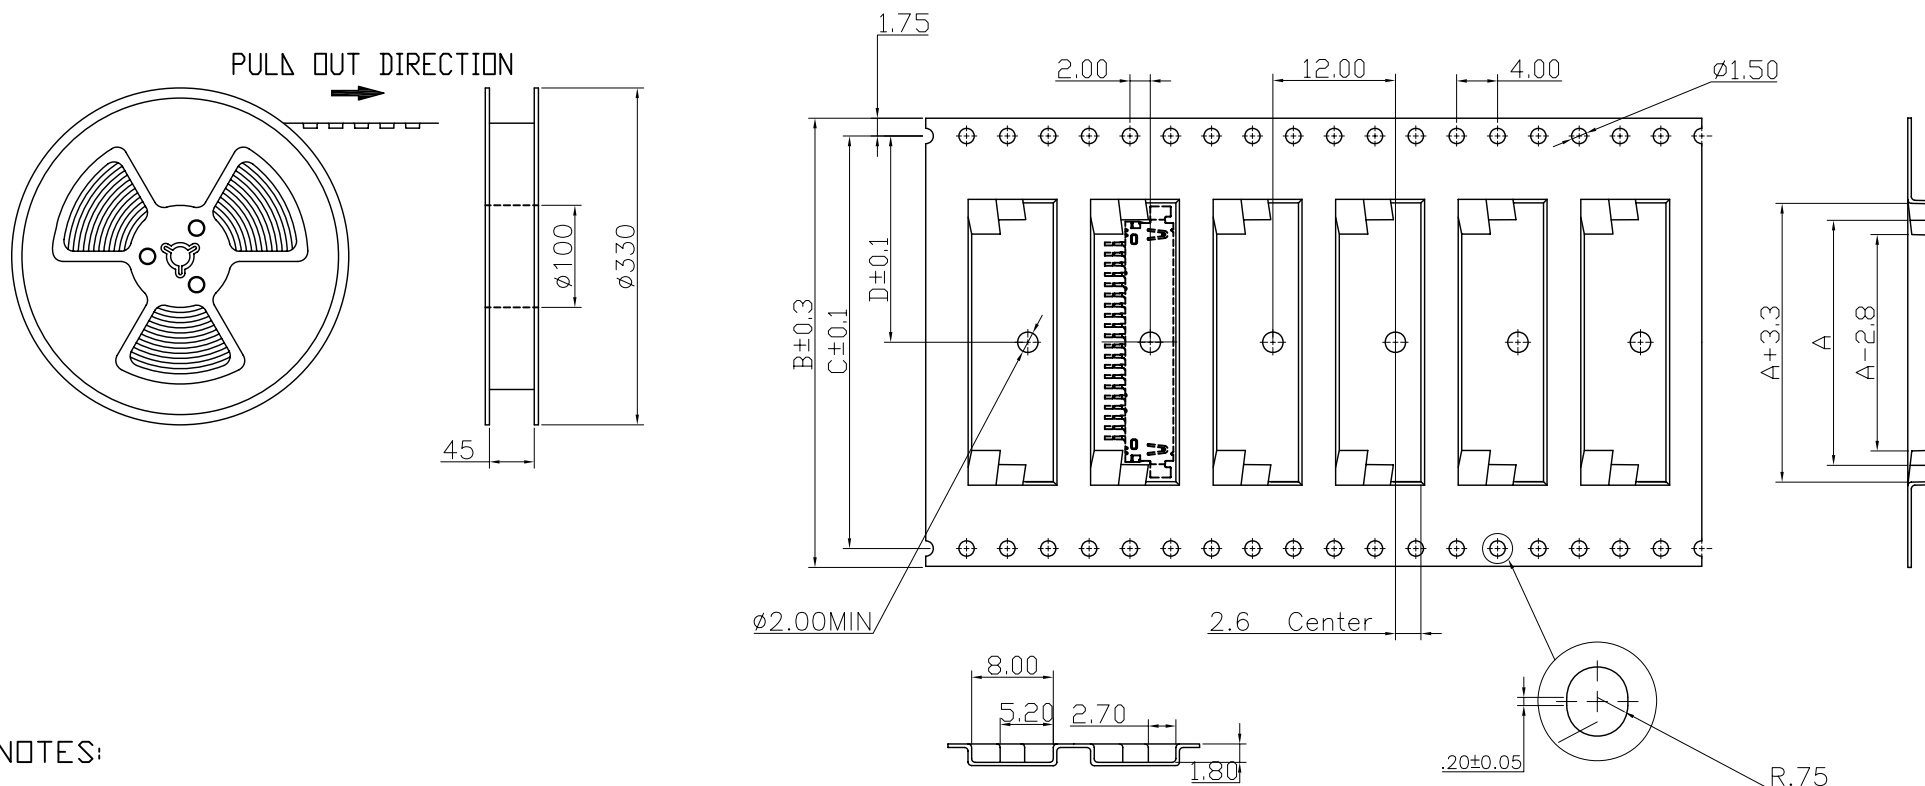

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material :Black Conductive Polystyrene Alloy (UP-6100).
4. All dimensions meet EIA-481-B requirements.
5. Thickness: 0.35 ± 0.05 mm.
6. Component load per 13" reel:2500pcs.

DF19-WXF11R-20	20	24.0	44.0	40.4	20.2
DF19-WXF11R-30	30	34.0	56.0	52.4	26.2
Part NO.	CKT	A	B	C	D

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DF19-WXF11R-xx-LF

SERIES

LEADFREE

08~30WAY


REEL

OFFSET 1.1mm


NON POST

90°SMT

DESCRIPTION:

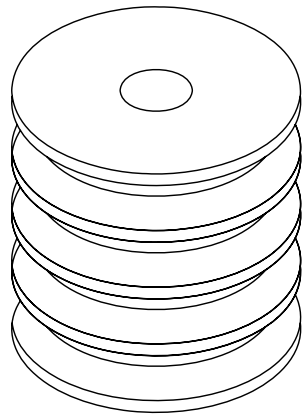

6RE/BC & 5RE/BC

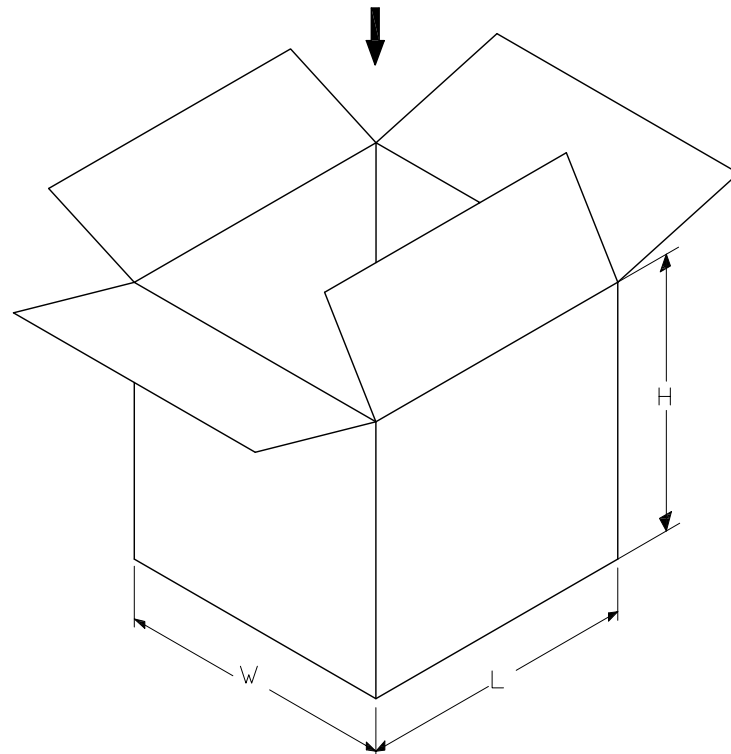

PCAKING MATERIAL

PART NAME	DIM(mm)
REEL	ø300*(B+1)
BIG CARTON	350X350X340

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
DF19-WXF11R-20	2500PCS/RE	6 RE/BC	15K PCS/BC
DF19-WXF11R-30	2500PCS/RE	5 RE/BC	12.5K PCS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PROJECTION

照片框

ORDER INFORMATION

DF19-WXF11R-xx-LF

SERIES
LEADFREE
08~30WAY
REEL
OFFSET 1.1mm
NON POST
90°SMT

DESCRIPTION: