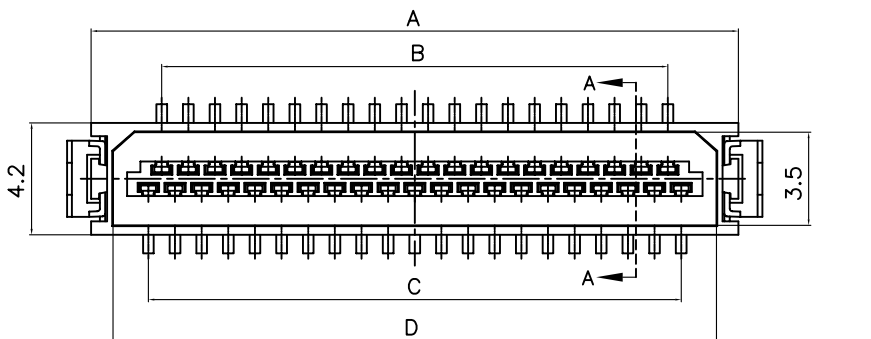


SPECIFICATIONS:

Material

1. INSULATOR: LCP
2. TERMINAL: PHOSPHOR BRONZE
3. EAR: BRASS

Plating

1. TERMINAL: Tin Plating
2. EAR: Tin Plating

Electrical

1. Current rating: 0.5A Per contact
2. Voltage rating: 150V AC
3. Dielectric withstanding voltage: 250V AC
4. Insulation resistance: 500M ohms min
5. Contact resistance: 50 milli ohms Max

PART NO.	A	B	C	D	E	F	L
DF9-P-31	19.30	14.00	15.00	17.65	18.10	10.00	21.10
DF9-P-41	24.30	19.00	20.00	22.65	23.10	15.00	26.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DF9-P-xx-LF
SERIES | LEADFREE
31.41WAY
MALE

DESCRIPTION: