




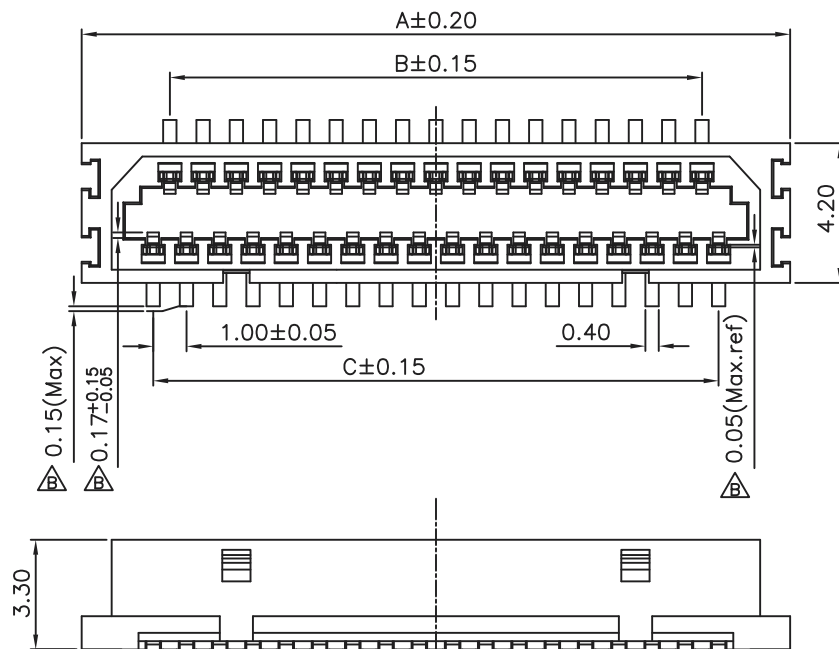

Pin No	A	B	C	Pin No	A	B	C
09	8.30	3.00	4.00	21	14.30	9.00	10.00
11	9.30	4.00	5.00	23	15.30	10.00	11.00
13	10.30	5.00	6.00	25	16.30	11.00	12.00
15	11.30	6.00	7.00	31	19.30	14.00	15.00
17	12.30	7.00	8.00	41	24.30	19.00	20.00
19	13.30	8.00	9.00	51	29.30	24.0	25.00


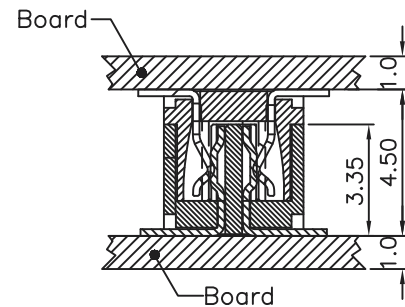


Mating Drawing (Ref.)

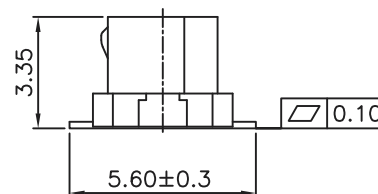

Specifications

Current rating : 0.5A AC/DC
Voltage rating : 150V AC/DC
Contact resistance : 50m ohm. max.
Insulation resistance : 500M ohm. min.at 100V DC
Withstanding Voltage : 250V AC for one minute
Operating Temperature range : -20°C to +105°C
Material and Plating
Housing :High Temp. Plastic
Color:Natural
Contact :Phosphor Bronze
Plating : Gold Plated

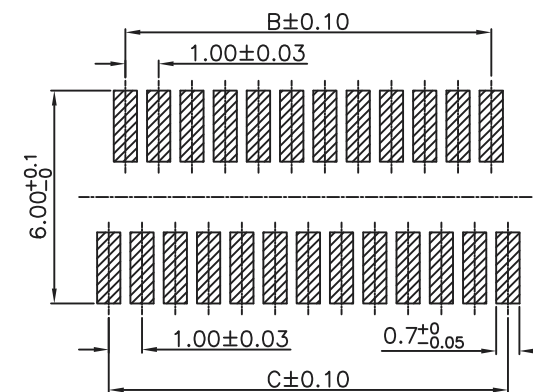

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.20
XX ± 0.15
XXX ±
ANG ±

照片框

ORDER INFORMATION

DF9-SXG01-xx-LF
SERIES | LEADFREE
| 09~51 WAY
| GOLD 1u"
| NON POST
| FEMALE

DESCRIPTION:1.0mm Board to Board Receptacle