


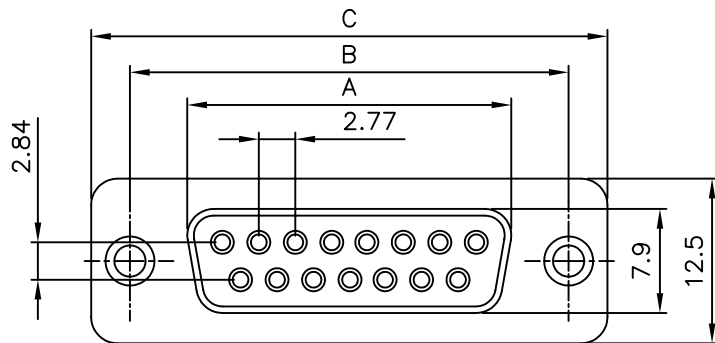

△ PARTS DIMENSION TABLE

parts no.	DIM. a	DIM. b	inner thread	outer thread
B	4.8	11.8	4#40	4#40
D	5.8	12.0	4#40	4#40
F	4.8	11.8	M3	M3

SPECIFICATION

MATERIAL

Insulator: Polyester resin and glass fiber reinforced (UL 94V-0)

Contacts: Phosphor bronze

△ CONTACT PLATING

Underplate: 40μ Nickel

Contact area: 1m²~30m² Selective gold

Solder tails area: 100μ Tin/Lead

ELECTRICAL

rating voltage: 125 VAC max.



Current rating: 1 Amp

Contact resistance: 15 mohms max.

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 400 VAC / minute

Operating temperature: -55°C TO +105°C

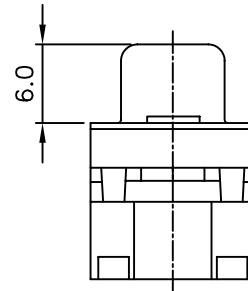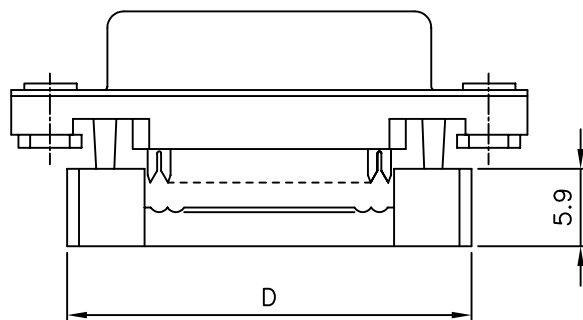

POSITION	A	B	C	D
9F	16.30	25.00	30.8	22.4
15F	24.60	33.30	39.2	30.8
25F	38.30	47.10	53.1	44.5
37F	54.80	63.50	69.4	61.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DFM-SNM3-xx-LF
SERIES | T | LEADFREE
| M3 | 09~37 WAY
NUT
FEMALE

DESCRIPTION: D-SUB IDC FOR FLAT RIBBON CABLE