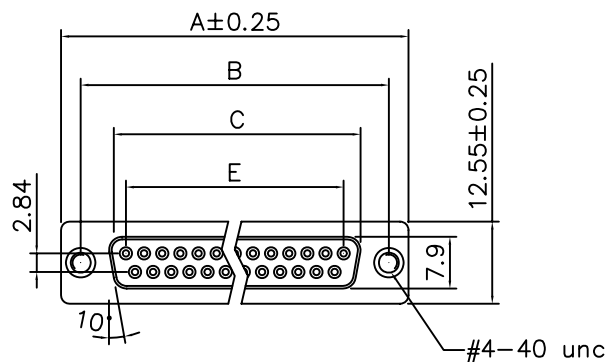


Cover

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0

Contact : Copper alloy

Shell : Steel, 100u" Tin Over 50u" min Copper

Electrical


Contact Resistance : 20 milliohms

Insulation Resistance : 1000
megohms at 500 VDC



Dielectric Withstanding Voltage :
1000 VAC/rms 60Hz for 1 minute

Current Rating : 3 AMP

Volatge Rating : 250 VAC/rms 60Hz

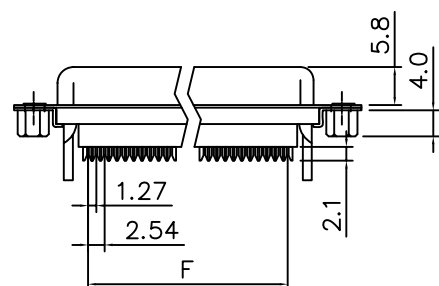

Without Insulator Support

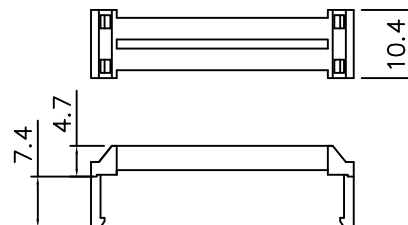

Strain Relief

Dimensions

Positions	A	B	C	E	F
9	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.70	19.39	17.78
25	53.05	47.04	38.40	33.24	30.48
37	69.40	63.50	54.80	49.86	45.72

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.38
.X ± 0.25
.XX ± 0.13
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DFMS-SN-xx-LF

SERIES | LEADFREE
09-37WAY
NUT
FEMALE

DESCRIPTION: D-SUB I.D.C TYPE