
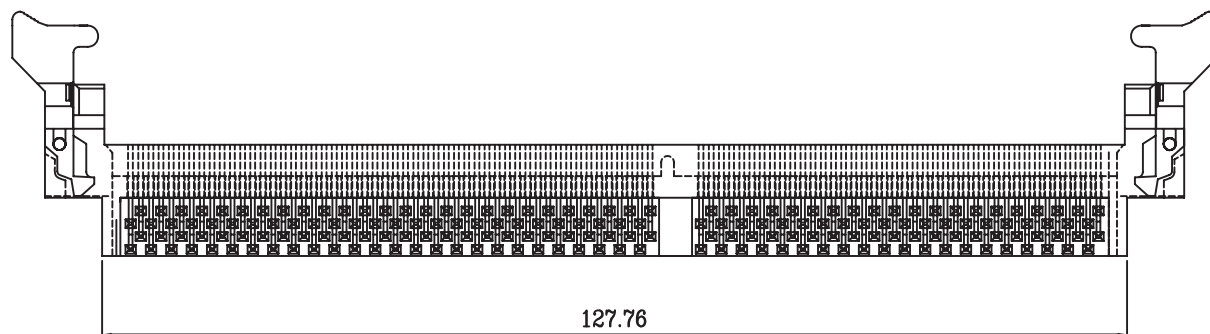
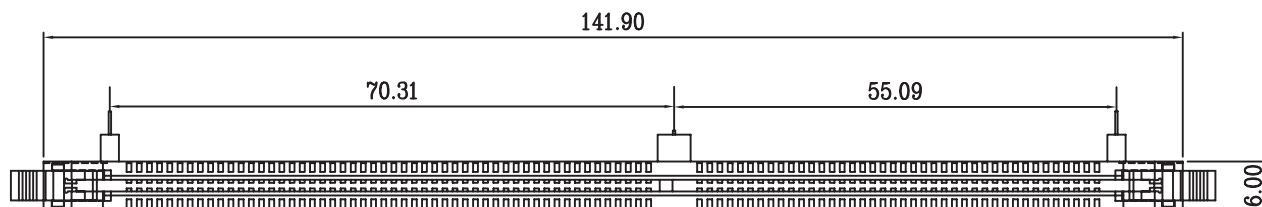


MATERIALS

- * Body : Liquid Crystal Polstal (L.C.P.) UL (94V-0)
- * Contact : Copper alloy
- * Contact plated : gold (3u")over niket (40-60u")or tin plating
- * Latch : Nylon 66 UL (94 V-0)

SPECIFICATION

- * Contact current rating : 1 AMP
- * Contact resistance : 30 Milli OHMS Max.
- * Insulation resistance : 10,000 megohms Min. initial
- * Operating temperature : -55°C to +105°C
- * Dielectric Withstanding Voltage : 1.0KVAC
- * Capacitance : 1pf Max.
- * Durability : 25 cycle Min.
- * Contact engaging force : 110 g Max. per contact,initial
- * Contact separating force : 40 g Min. per contact,initial

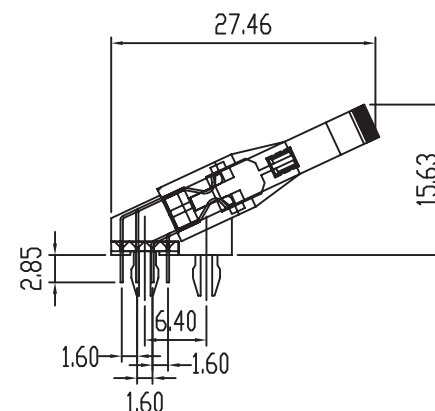

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

DIM-AZS15-184-LF
SERIES LEADFREE
184 WAY
SEMI GOLD 15u"
CLIP
SLANT DIP

DESCRIPTION: DDR Socket 184P lowprofile 25°