


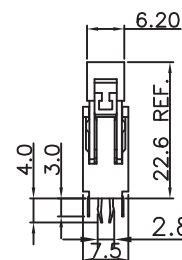


SECTION:A-A
SCALE:2/1


NOTE:
MATERIAL:
HOUSING:THERMOPLASTIC;(NYLON&LCP)
CONTACT:BRASS
PLATING:
CONTACT: GOLD PLATING ON CONTACT AREA
100u" MIN. TIN PLATING ON SOLIDTERTAILS
50u" MIN NICKEL PLATING
BOARD LOCK:50u" MIN NICKEL PATING
SPECIFICATION:
VOLTAGE RATING: 100V AC/DC
CURRENT RATING: 1A
CONTACT RESISTANCE TERMINAL:30mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE:500V DC
INSULATION RESISTANCE:1000MΩ MIN

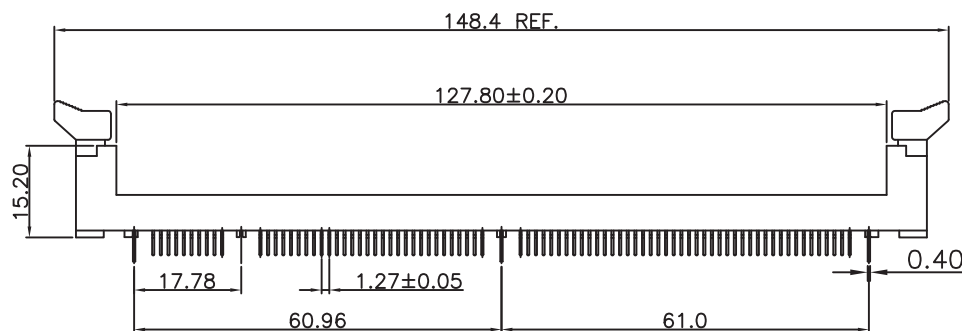

SCALE:B(2/1)



SCALE:C(2/1)

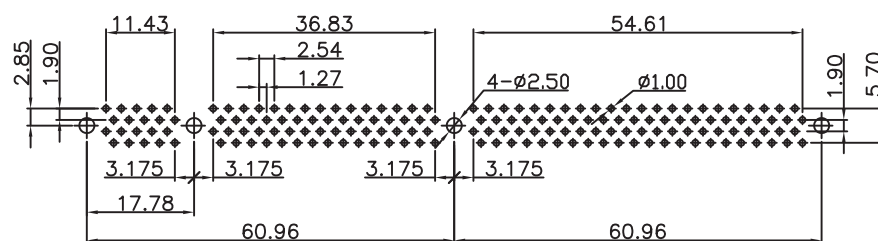

RECOMMENDED PCB LAYOUT



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

DIM-DZ-168-LF
SERIES | LEADFREE
CLIP | 168 WAY
DIP 180°

DESCRIPTION: DIMM 1.27 168P DIP180° 高耳扣成品