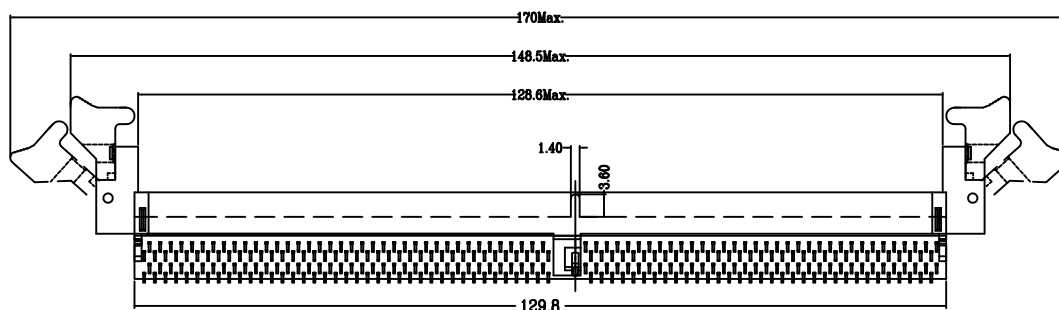


P.C.B.Layout

MATERIALS

- * Body : Liquid Crystal Polstal (L.C.P.) UL (94V-0)
- * Contact : Copper alloy
- * Contact plated : gold over niket (40-60u")or tin plating
- * Latch : Nylon 66 UL (94 V-0)

SPECIFICATION

- * Contact current rating : 0.5 AMP
- * Contact resistance : 30 Milli OHMS Max.
- * Insulation resistance : 500 megohms Min. initial
- * Operating temperature : -55°C to +105°C
- * Dielectric Withstanding Voltage : AC 50V
- * Capacitance : 1pf Max.
- * Durability : 25 cycle Min.
- * Contact engaging force : 60 g Max. per contact,initial
- * Contact separating force : 35 g Min. per contact,initial

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50


.X ± 0.35

.XX ± 0.25

.XXX ± 0.10

ANG ±

PPOJECTION






ORDER INFORMATION

DIM085-AZ-288V12-LF

SERIES
CLIP
SLANT DIP
LEADFREE
1.2V
288 WAY

DESCRIPTION: DDR4-288p 0.85mm Pitch 25 Degree type

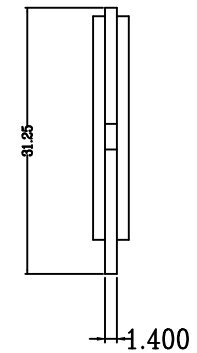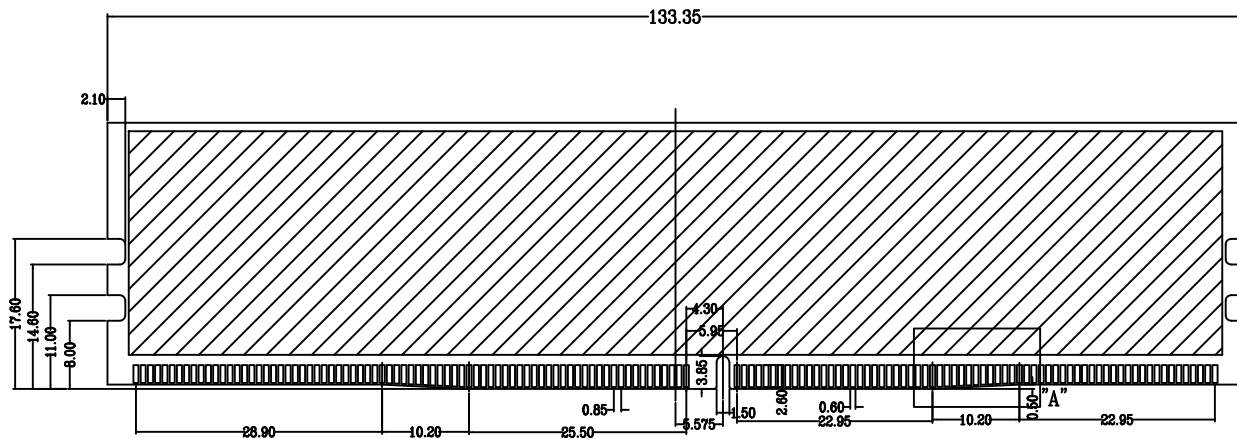

"A" S=2/1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ± 0.50
.X ± 0.35
.XX ± 0.25
.XXX ± 0.10
ANG ±



ORDER INFORMATION

DIM085-AZ-288V12-LF

SERIES

CLIP

288 WAY

SLANT DIP

1.2V

LEADFREE

DESCRIPTION: DDR4-288P 0.85mm pitch Module