
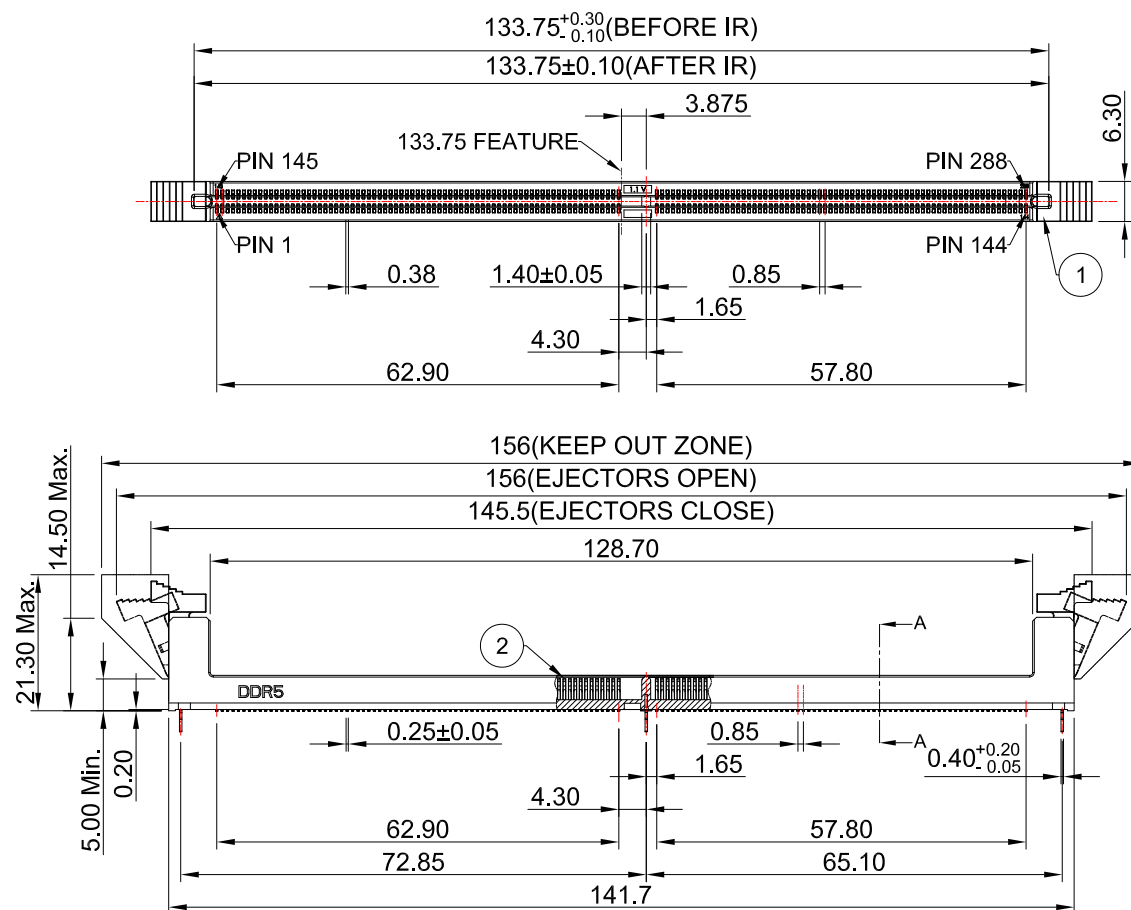


SECTION A-A



TAB TYPE

4	Boardlock	Stainless Steel	3
3	Latch	High Temp. Thermoplastic, UL94V-0,Black	2
2	Contact	Copper Alloy,Gold Plated on solder area	288
1	Insulator	High Temp. Thermoplastic, UL94V-0,Black	1
No.	Material	Specifications	Q'ty(pcs)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION


照片框

ORDER INFORMATION

DIM085-VM20BK-288V11R-LF

SERIES
180° SMT
BLACK
METAL FOOT 2.0mm
288 WAY
1.1V
RDIMM
LEADFREE

DESCRIPTION: DIMM DDR 5 288 Pin SMT Vertical Type

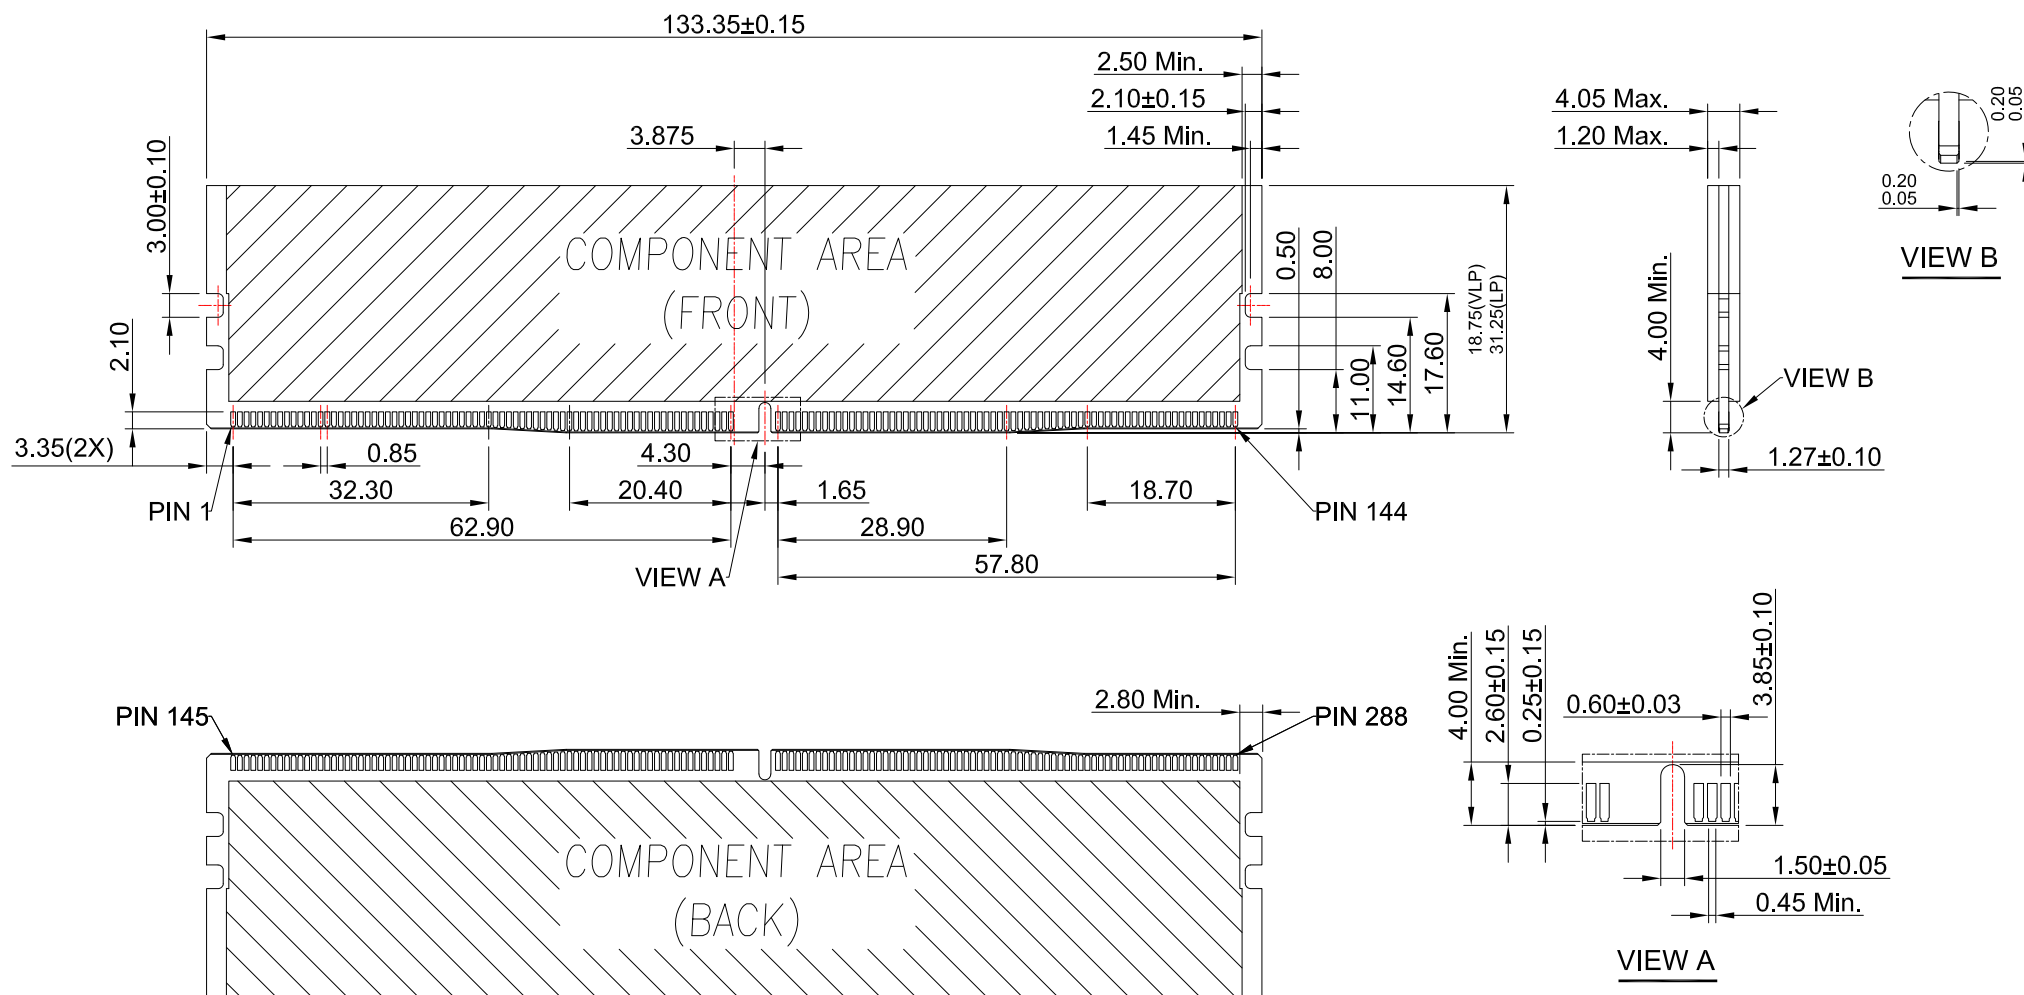

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DIM085-VM20BK-288V11R-LF

SERIES

180° SMT

BLACK




288 WAY

METAL FOOT 2.0mm

LEADFREE
RDIMM

1.1V

DESCRIPTION: DIMM DDR 5 288 Pin SMT Vertical Type

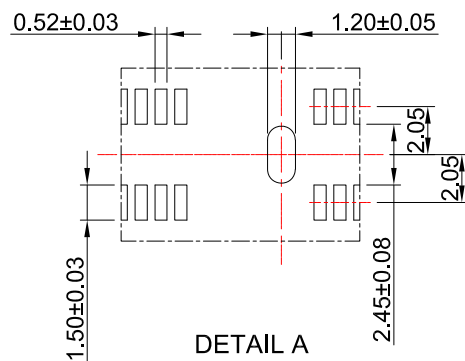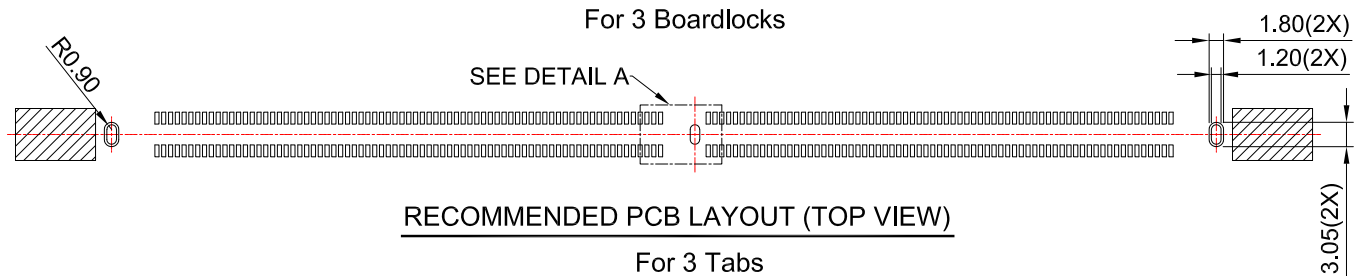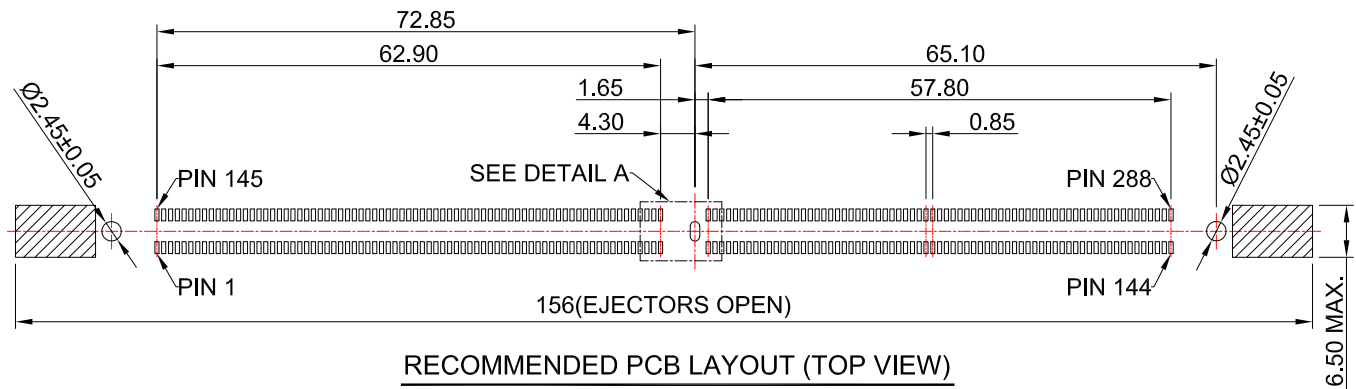

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DIM085-VM20BK-288V11R-LF

SERIES

180° SMT

BLACK

288 WAY


METAL FOOT 2.0mm

LEADFREE

RDIMM

1.1V

DESCRIPTION: DIMM DDR 5 288 Pin SMT Vertical Type

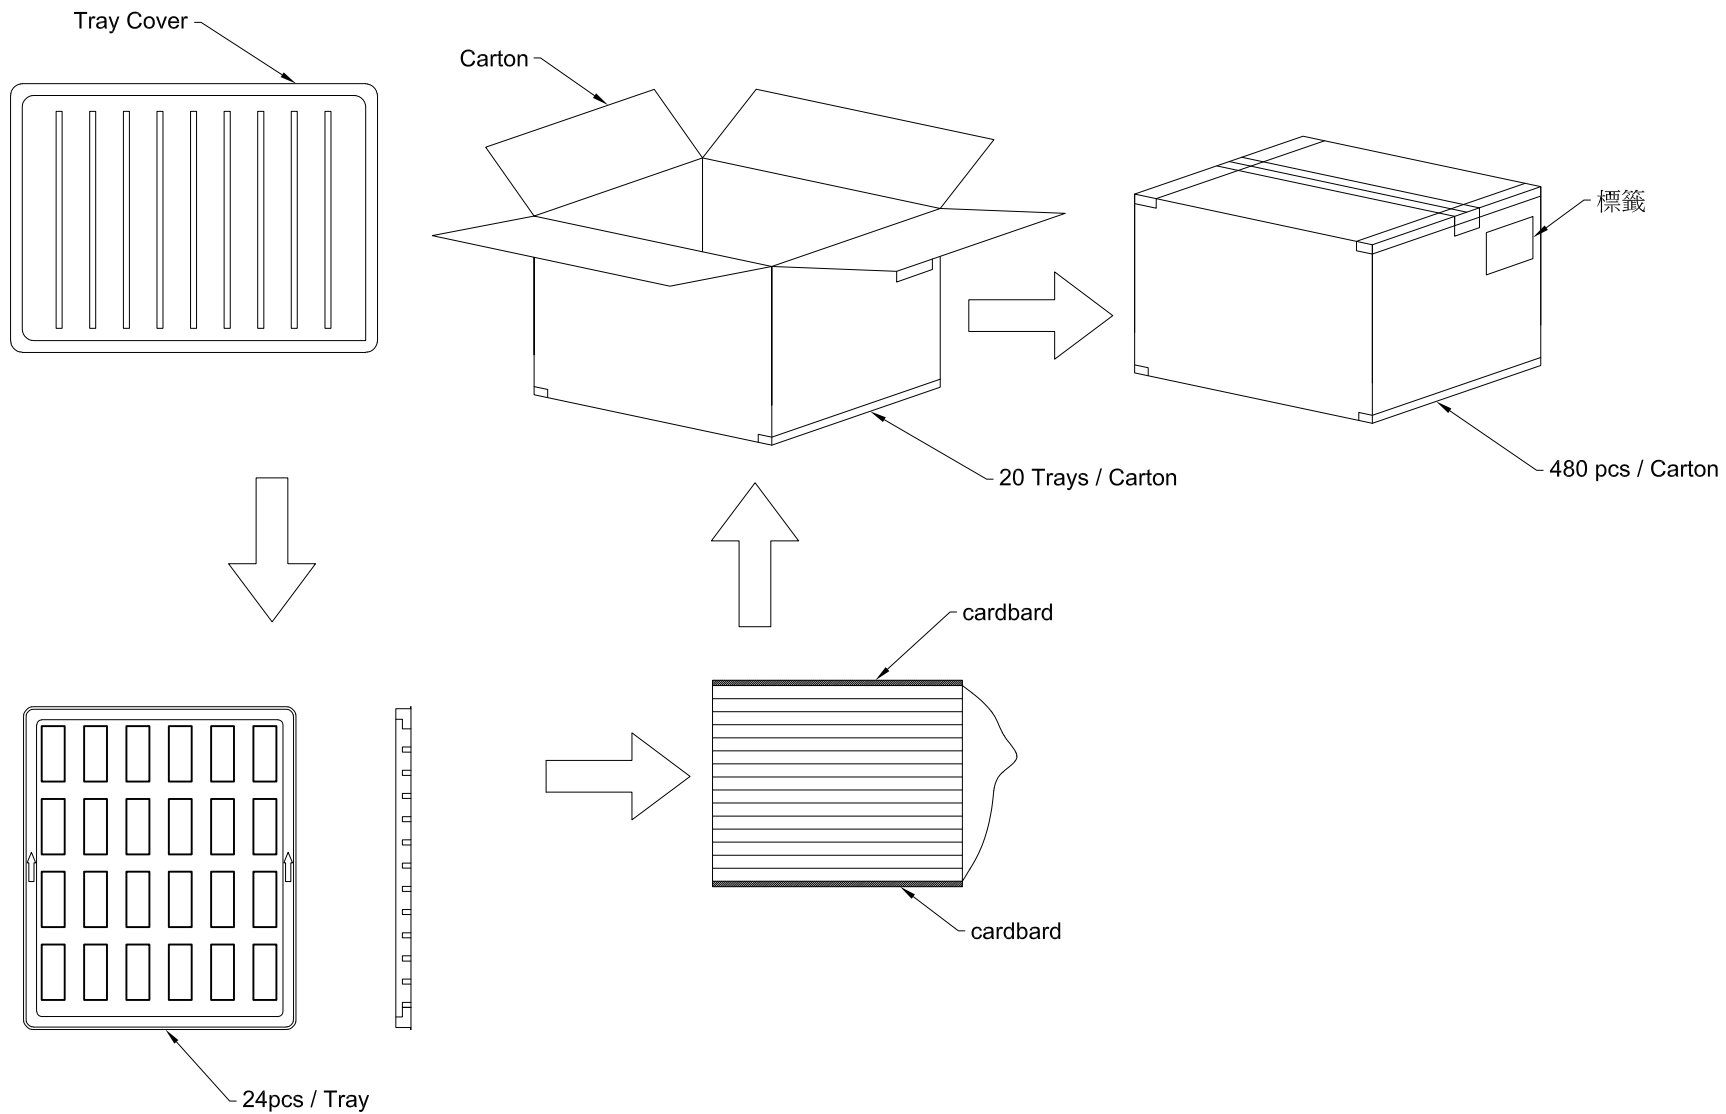

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DIM085-VM20BK-288V11R-LF

SERIES
180° SMT
BLACK
METAL FOOT 2.0mm
288 WAY
1.1V
RDIMM
LEADFREE

DESCRIPTION: DIMM DDR 5 288 Pin SMT Vertical Type