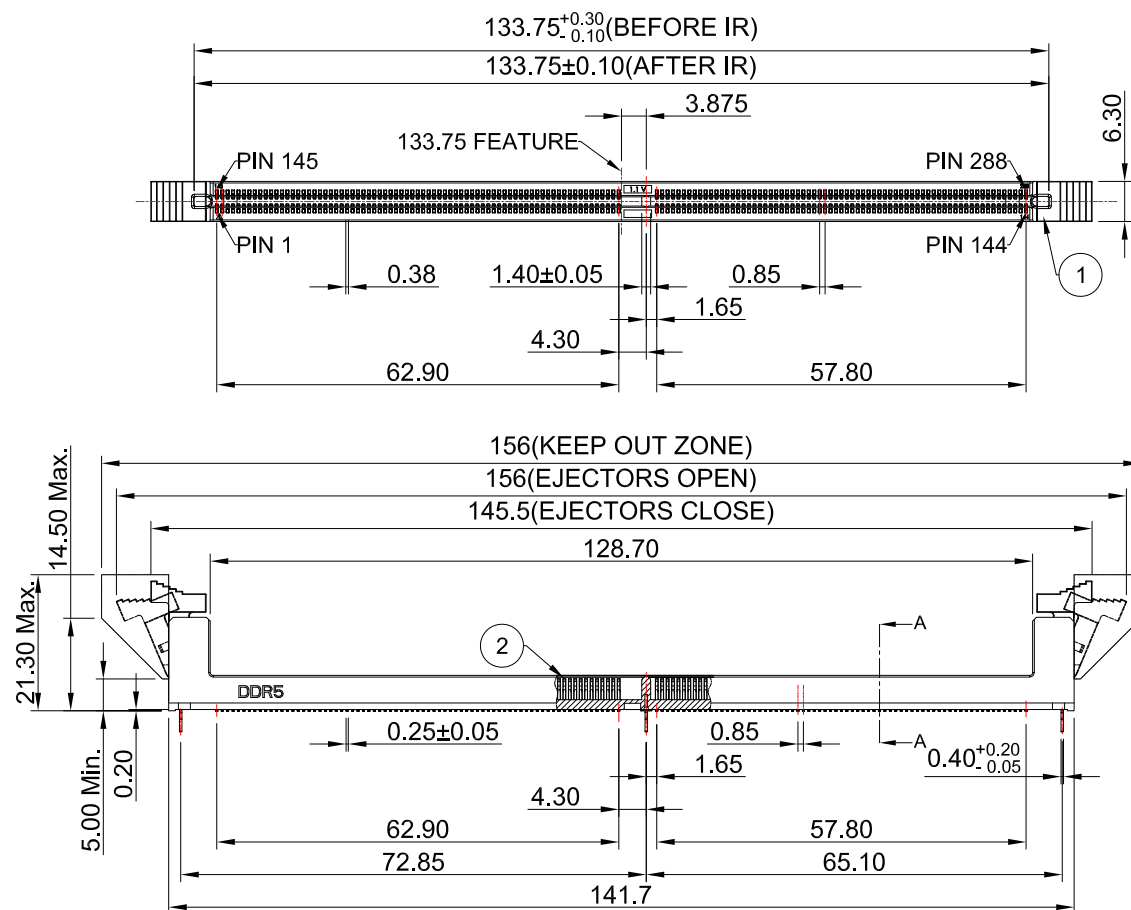


4	Boardlock	Stainless Steel	3
3	Latch	High Temp. Thermoplastic, UL94V-0, Blue	2
2	Contact	Copper Alloy, Gold Plated on solder area	288
1	Insulator	High Temp. Thermoplastic, UL94V-0, Blue	1
No.	Material	Specifications	Q'ty(pcs)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DIM085-VM20BL-288V11R-LF

SERIES

180° SMT

BLUE

METAL FOOT

2.0mm


288 WAY

1.1V

LEADFREE

RDIMM

DESCRIPTION: DIMM DDR 5 288 Pin SMT Vertical Type

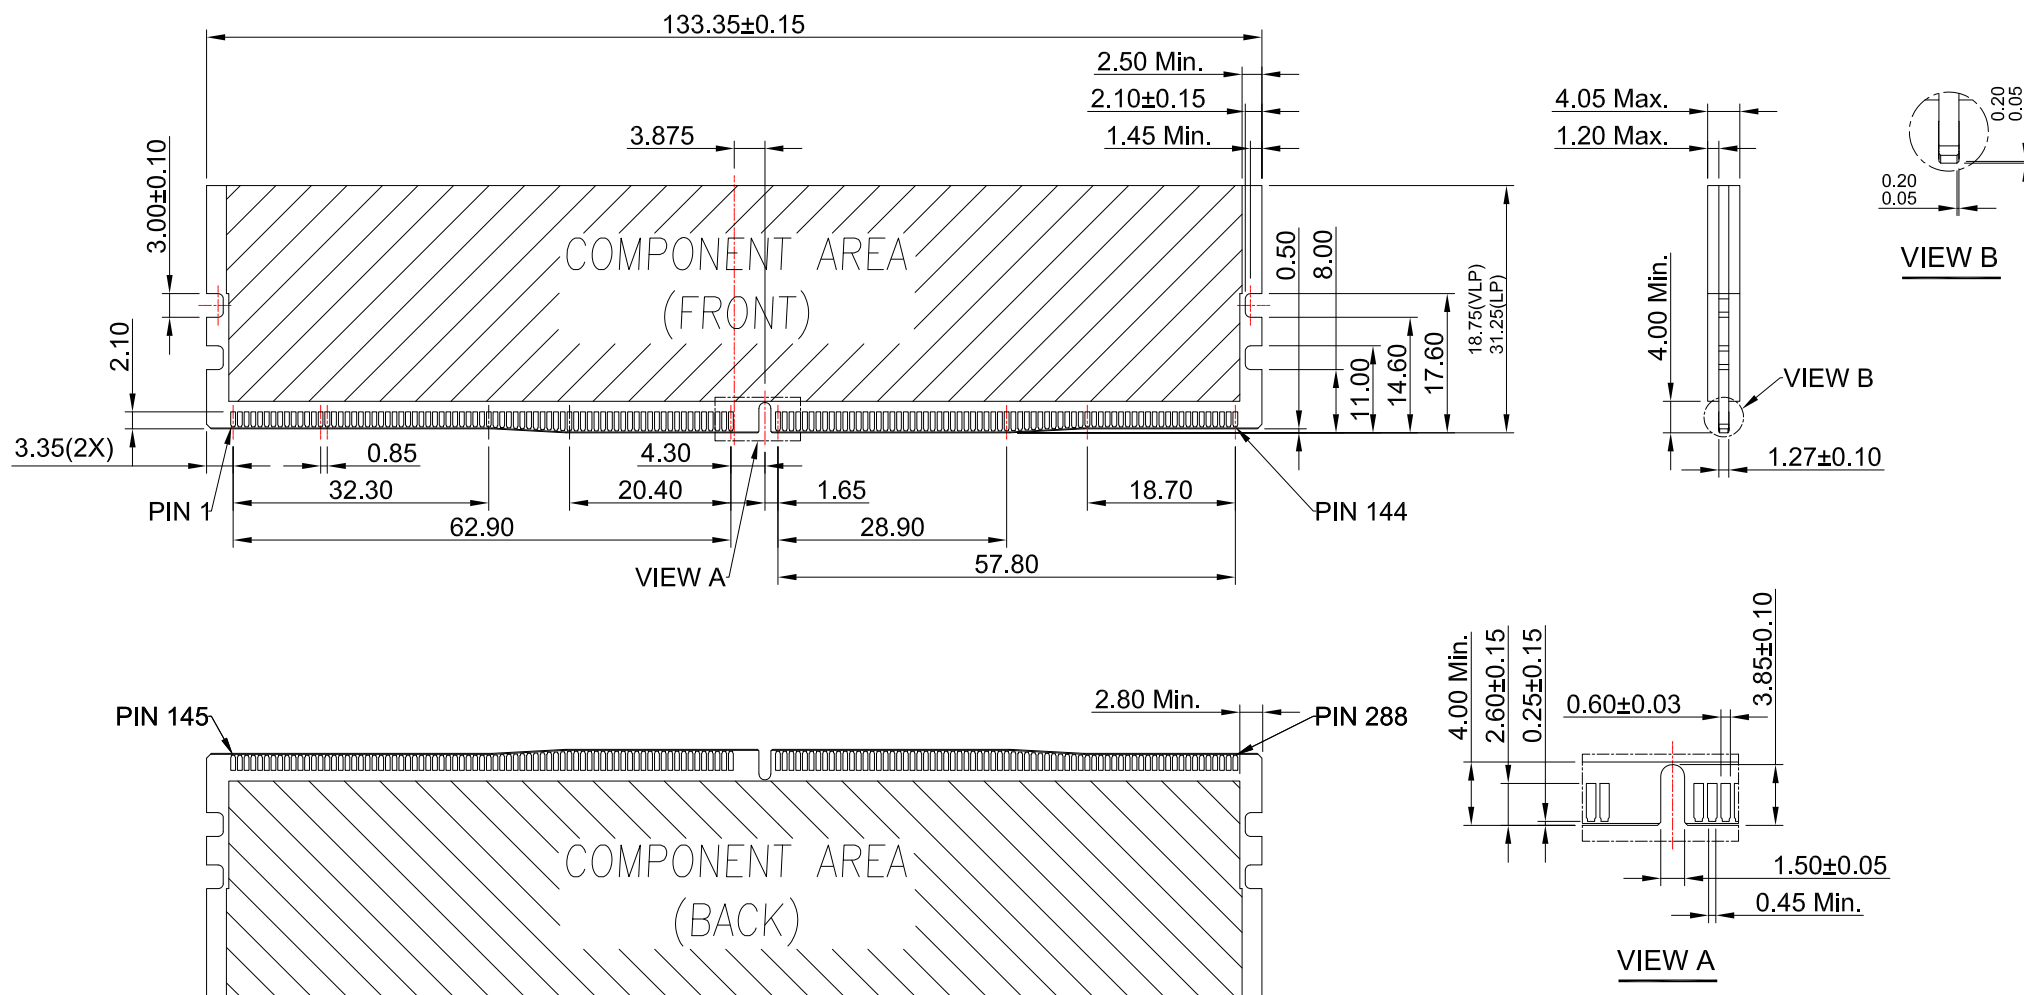

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DIM085-VM20BL-288V11R-LF

SERIES

180° SMT

BLUE

METAL FOOT 2.0mm


LEADFREE

RDIMM


1.1V

288 WAY


DESCRIPTION: DIMM DDR 5 288 Pin SMT Vertical Type

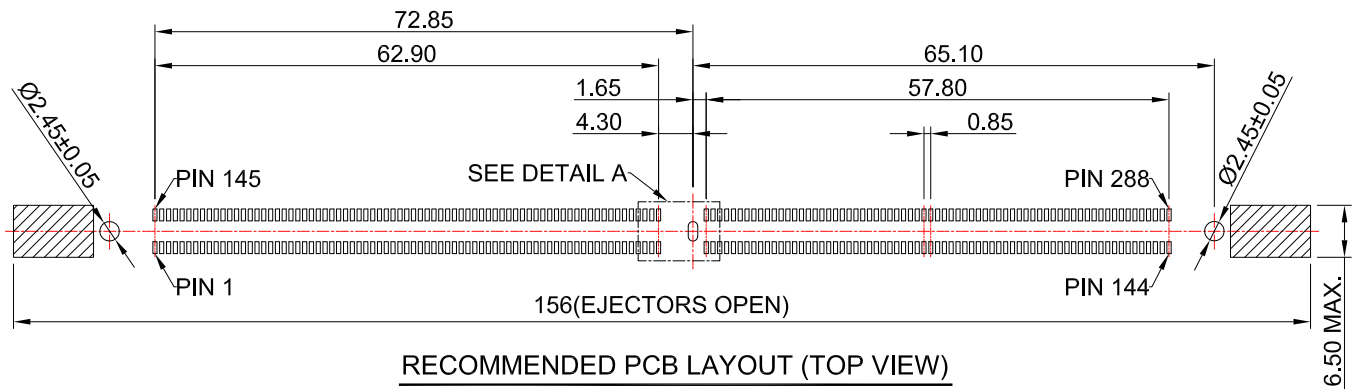

For 3 Boardlocks

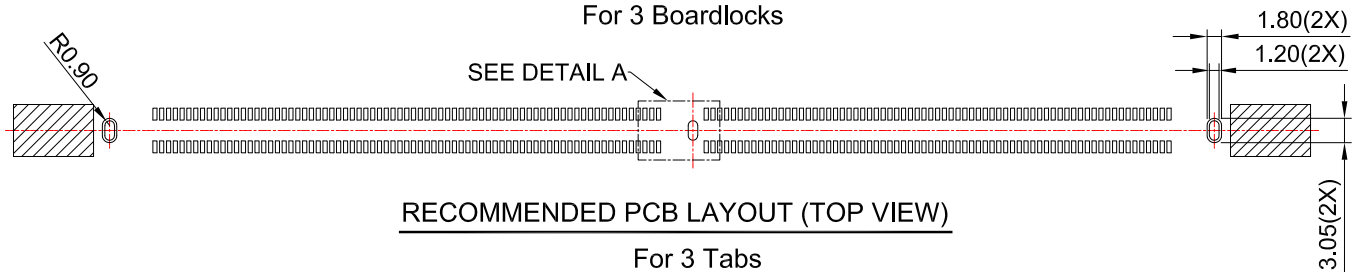

For 3 Tabs

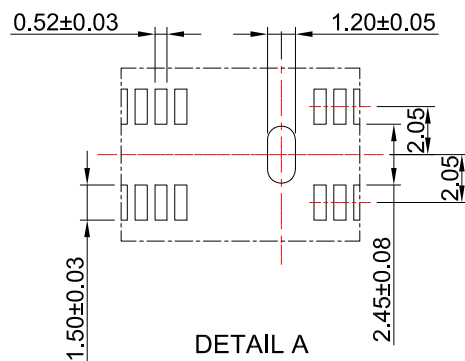

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION


照片框

ORDER INFORMATION

DIM085-VM20BL-288V11R-LF

SERIES
180° SMT
BLUE
METAL FOOT 2.0mm
288 WAY
1.1V
LEADFREE
RDIMM

DESCRIPTION: DIMM DDR 5 288 Pin SMT Vertical Type

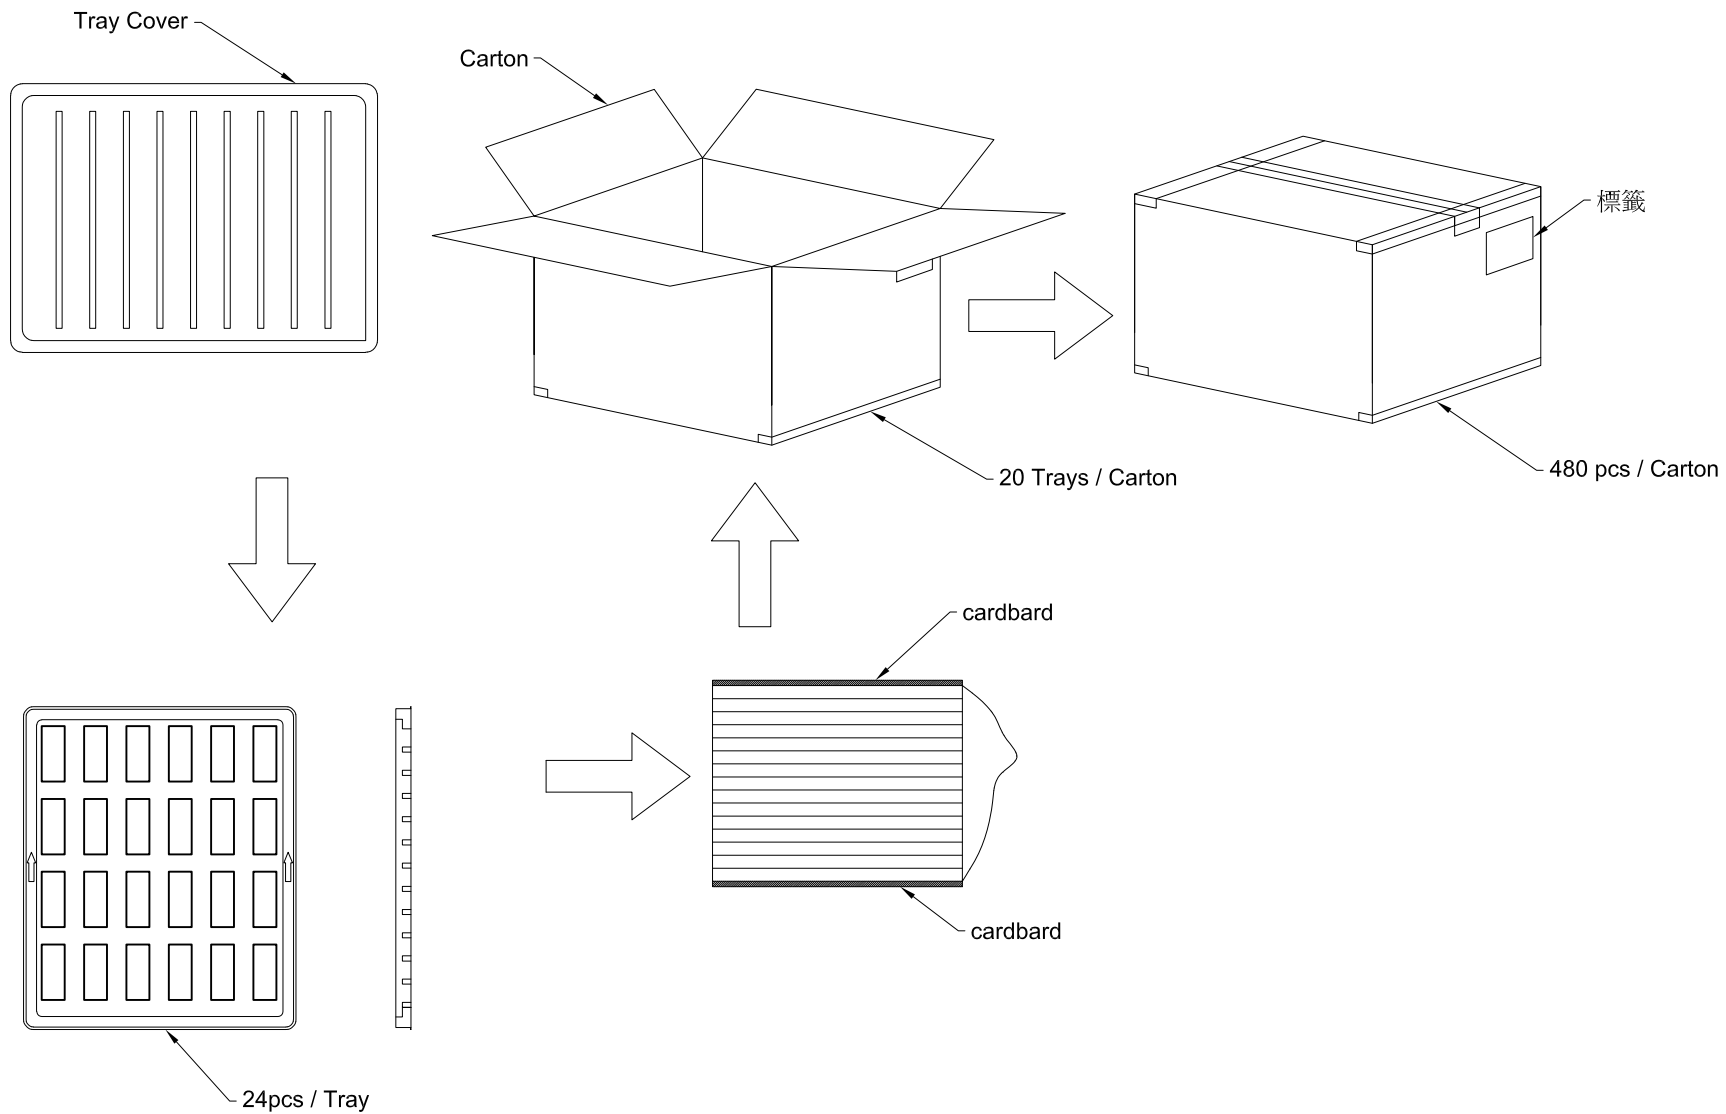

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DIM085-VM20BL-288V11R-LF

SERIES

180° SMT

BLUE

288 WAY

METAL FOOT 2.0mm

LEADFREE

RDIMM

DESCRIPTION: DIMM DDR 5 288 Pin SMT Vertical Type