


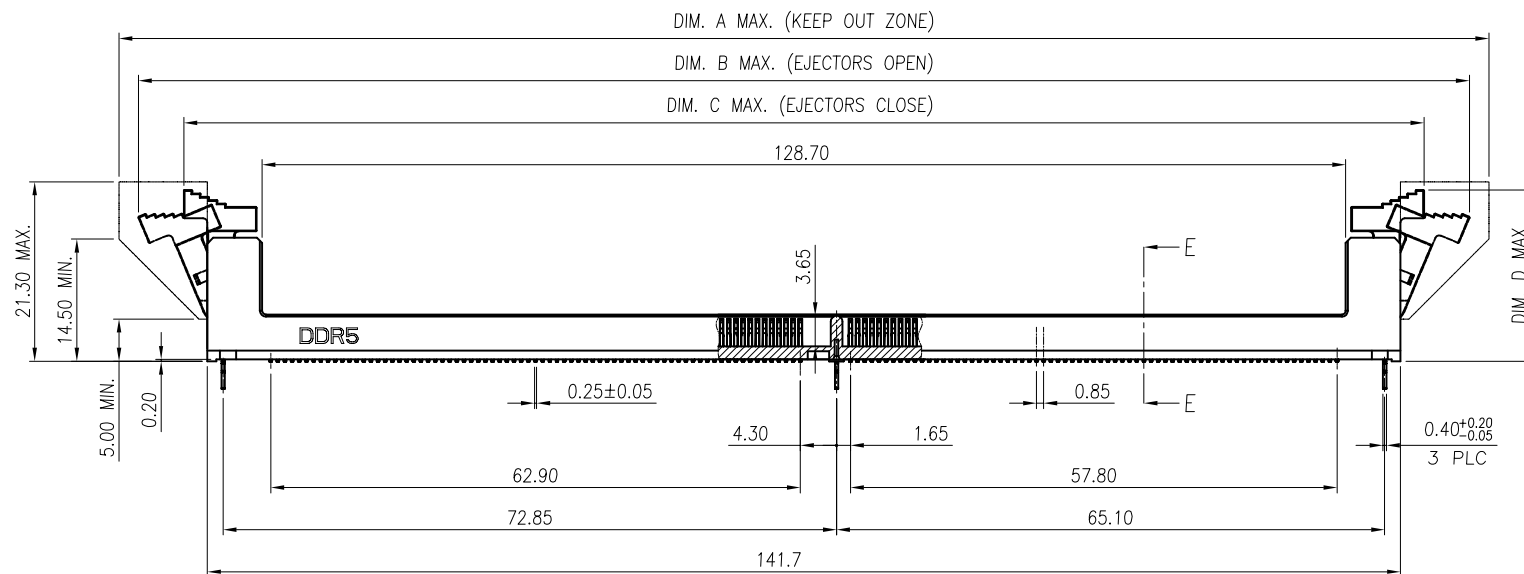





DESCRIPTION: R-DIMM DDR5 288P SMT type

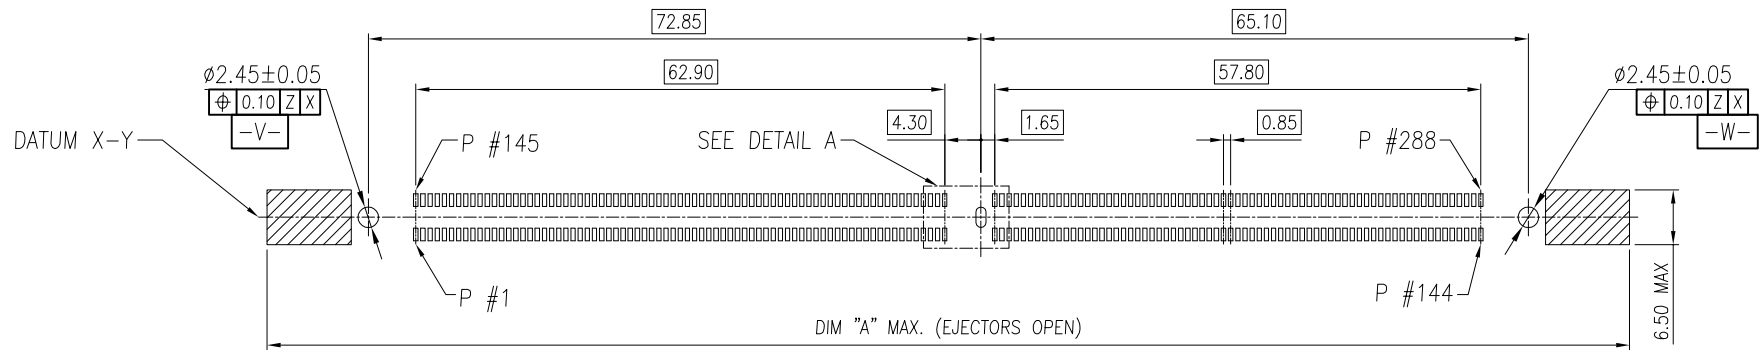

RECOMMENDED PCB LAYOUT (TOP VIEW)
FOR 3 BOARDLOCKS

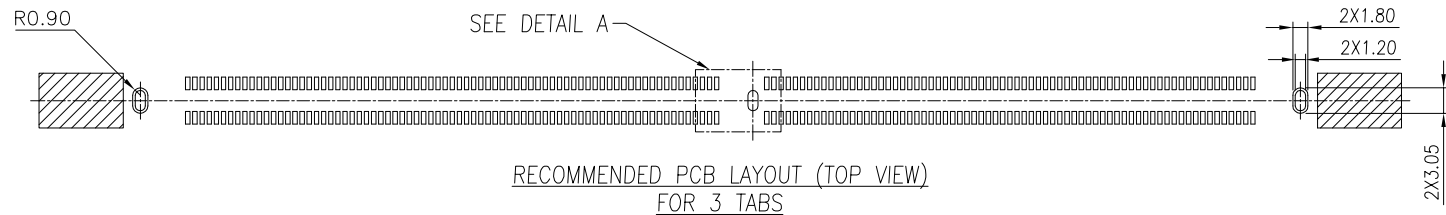

RECOMMENDED PCB LAYOUT (TOP VIEW)
FOR 3 TABS

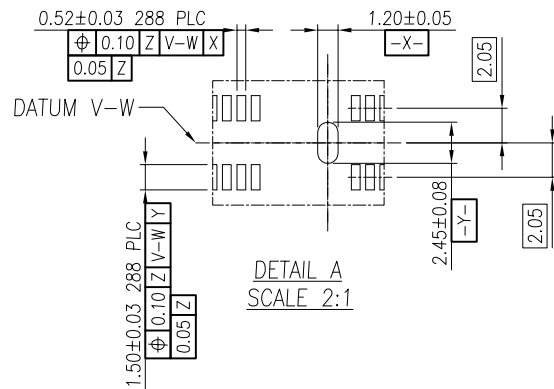

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
X. ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG $\pm$

照片框

ORDER INFORMATION

DIM085-VZ32BL-288V11R-LF

SERIES

180° SMT

CLIP FOOT

BLUE

288 WAY

3.28mm

1.1V

RDIMM

LEADFREE

DESCRIPTION: R-DIMM DDR5 288P SMT type

NOTES:

1. MATERIAL :

- 1.1 HOUSING: HIGH PERFORMANCE RESINS, GLASS FILBER, UL94 V-0, COLOR: SEE PART NO..
- 1.2 LATCH: HIGH PERFORMANCE RESINS, GLASS FILBER, UL94 V-0, COLOR: SEE PART NO..
- 1.3 CONTACTS: COPPER ALLOY.
- 1.4 BOARDLOCK: STAINLESS STEEL.
- 1.5 TABS: STAINLESS STEEL.

2. FINISH :


2.1 CONTACT

[SEE PART NO..] GOLD PLATING ON THE CONTACT AREA.
100u" MIN. MATTE-TIN PLATING ON THE SOLDERING AREA.
50u" MIN. NICKEL UNDERPLATING OVERALL.

3. PRODUCT SPEC:01: G/F, 15:15u"Au, 30:30u"Au,

4. PART NO. BLUE

20.70	147.50	158.50	162.00	LONG
20.30	145.50	156.00	156.00	MIDDLE
20.20	142.00	151.50	152.00	SHORT
DIM. D	DIM. C	DIM. B	DIM. A	LATCH TYPE

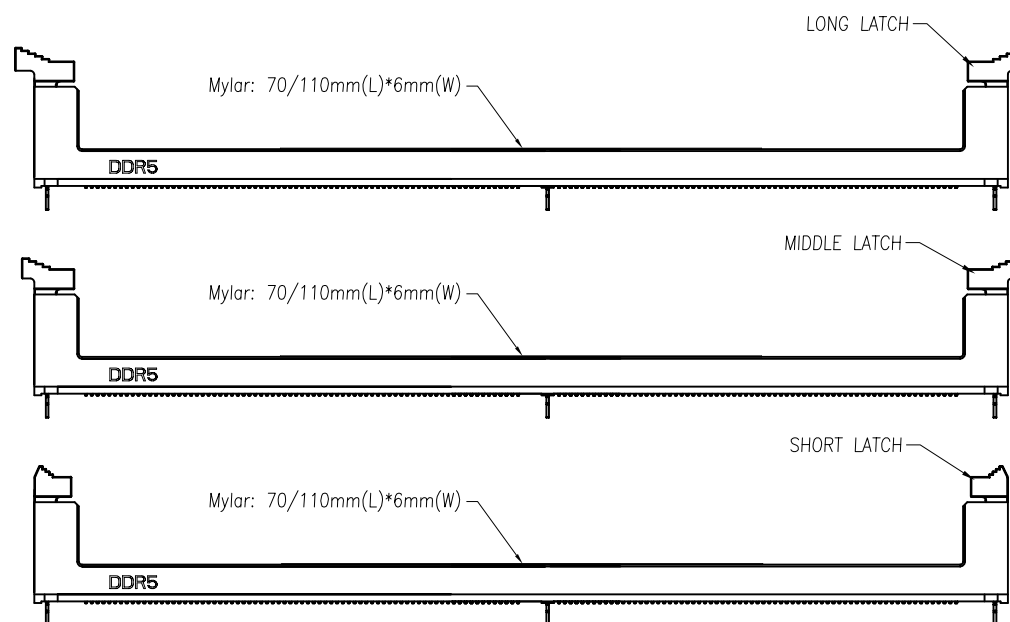

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ±

照片框

ORDER INFORMATION

DIM085-VZ32BL-288V11R-LF

SERIES

180° SMT

CLIP FOOT

3.28mm

288 WAY

1.1V

BLUE

LEADFREE

RDIMM

DESCRIPTION: R-DIMM DDR5 288P SMT type