
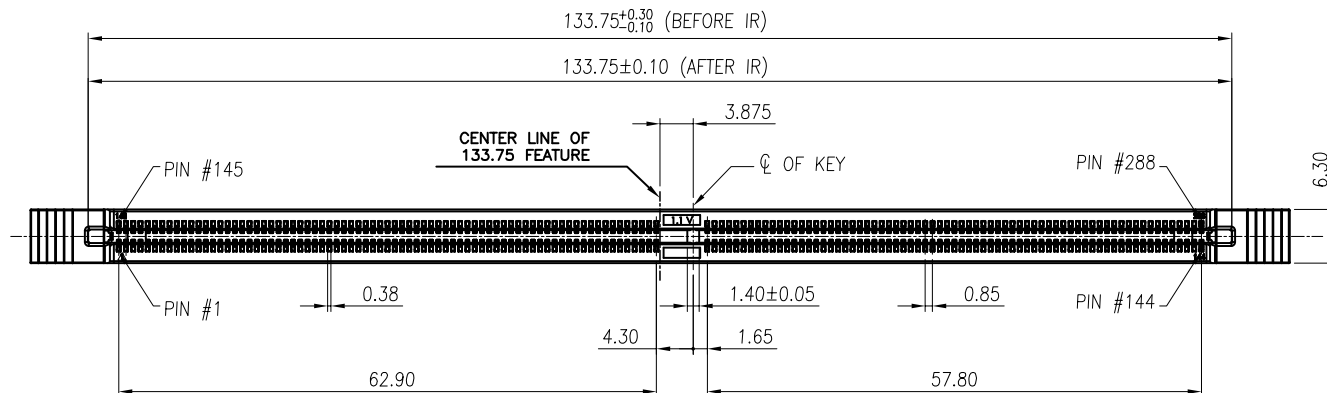



SECTION E-E
SCALE 2:1

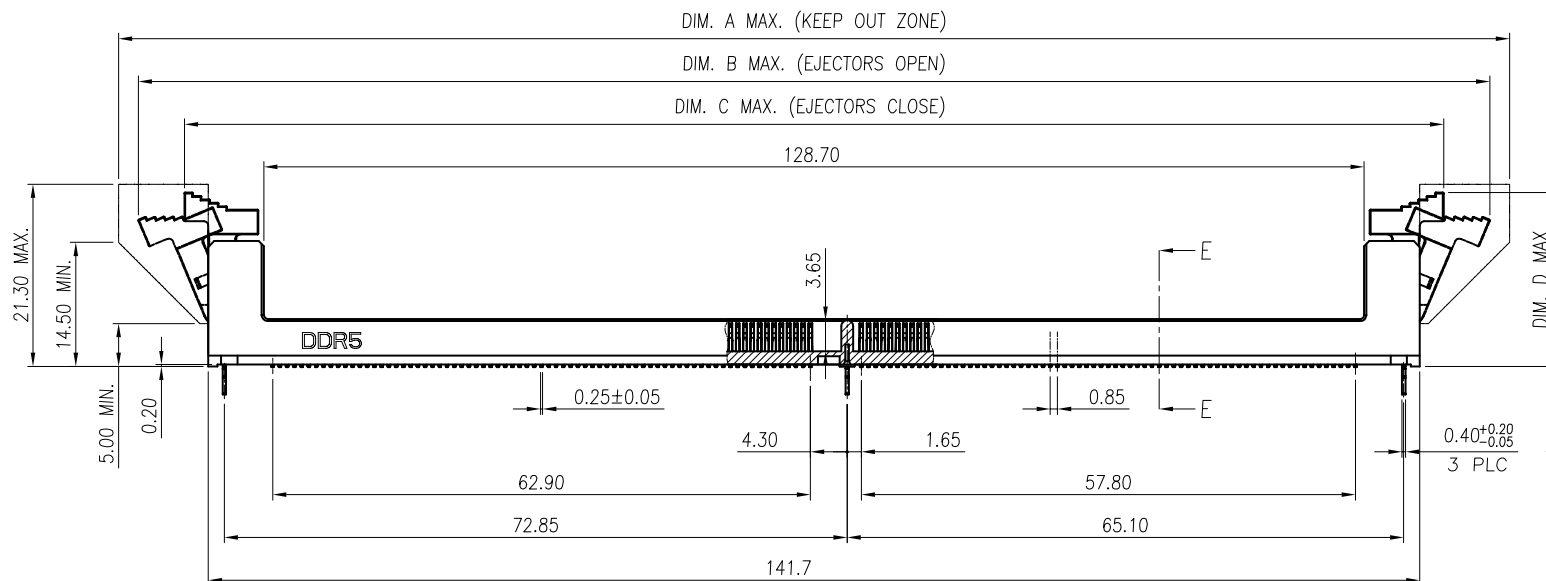

BOARDLOCKS TYPE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION

照片框

ORDER INFORMATION


DIM085-VZ32BL-288V11Rx-LF

SERIES


180° SMT
CLIP FOOT 3.28mm

LEADFREE
L.M.S LATCH
RDIMM
288 WAY
BLUE


DESCRIPTION: DDR5 R-DIMM 288PIN 立贴

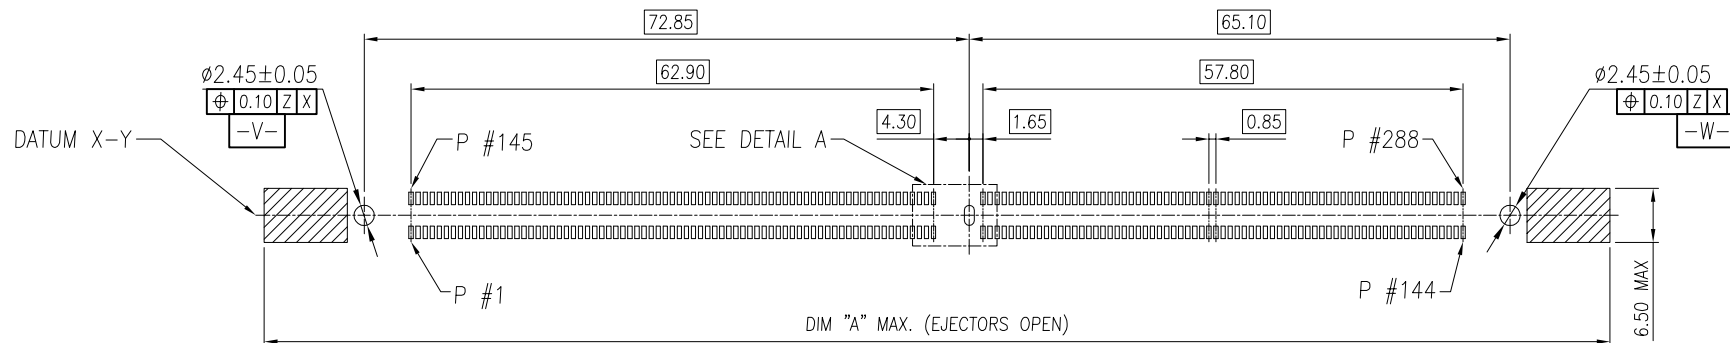

RECOMMENDED PCB LAYOUT (TOP VIEW)
FOR 3 BOARDLOCKS

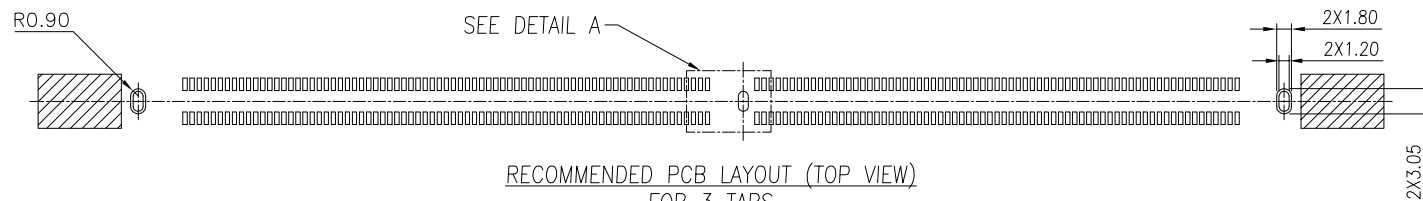

RECOMMENDED PCB LAYOUT (TOP VIEW)
FOR 3 TABS

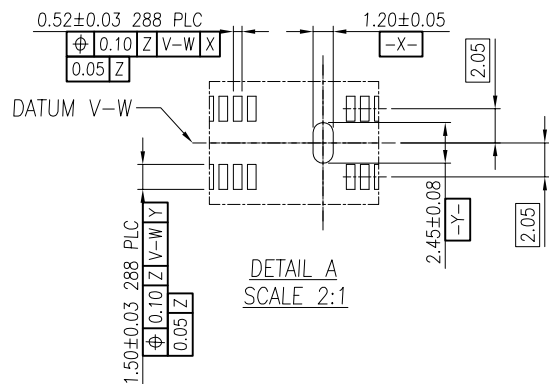

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DIM085-VZ32BL-288V11Rx-LF

SERIES

LEADFREE
L.M.S LATCH
RDIMM

180° SMT
CLIP FOOT 3.28mm

BLUE
288 WAY
1.1V

DESCRIPTION: DDR5 R-DIMM 288PIN 立貼

NOTES:


1. MATERIAL :
- 1.1 HOUSING: HIGH PERFORMANCE RESINS, GLASS FILBER, UL94 V-0, COLOR: SEE PART NO..
 - 1.2 LATCH: HIGH PERFORMANCE RESINS, GLASS FILBER, UL94 V-0, COLOR: SEE PART NO..
 - 1.3 CONTACTS: COPPER ALLOY.
 - 1.4 BOARDLOCK: STAINLESS STEEL.
 - 1.5 TABS: STAINLESS STEEL.

2. FINISH :

2.1 CONTACT

[SEE PART NO..] GOLD PLATING ON THE CONTACT AREA.
100u" MIN. MATTE-TIN PLATING ON THE SOLDERING AREA.
50u" MIN. NICKEL UNDERPLATING OVERALL.

20.70	147.50	158.50	162.00	LONG
20.30	145.50	156.00	156.00	MIDDLE
20.20	142.00	151.50	152.00	SHORT
DIM. D	DIM. C	DIM. B	DIM. A	LATCH TYPE

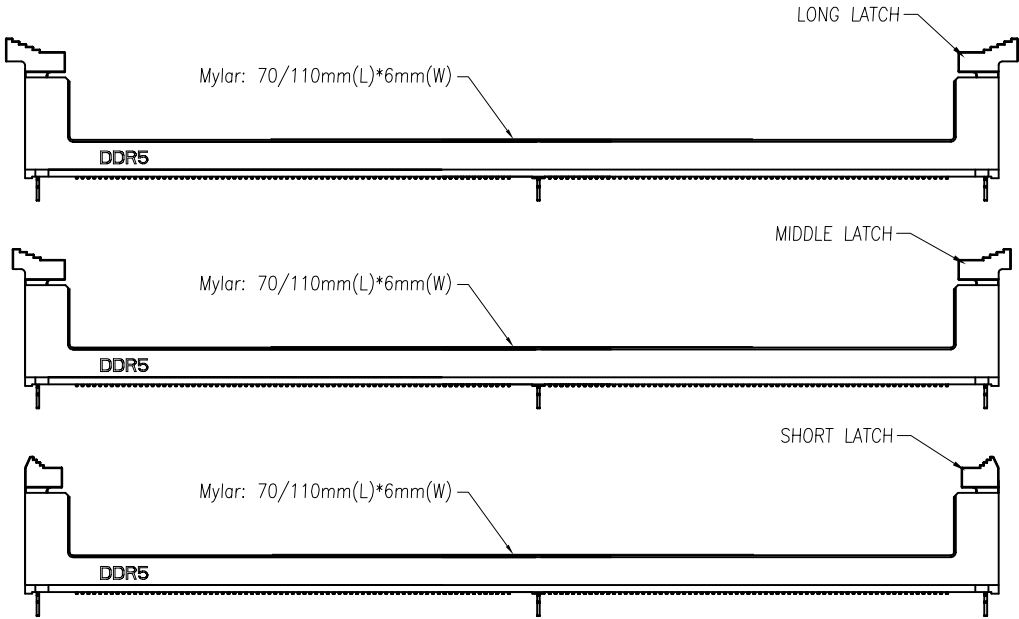

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ±

照片框

ORDER INFORMATION

DIM085-VZ32BL-288V11Rx-LF

SERIES

180° SMT

CLIP FOOT 3.28mm

BLUE

288 WAY

1.1V

LEADFREE
L.M.S LATCH
RDIMM

DESCRIPTION: DDR5 R-DIMM 288PIN 立贴