


P.C.B.Layout

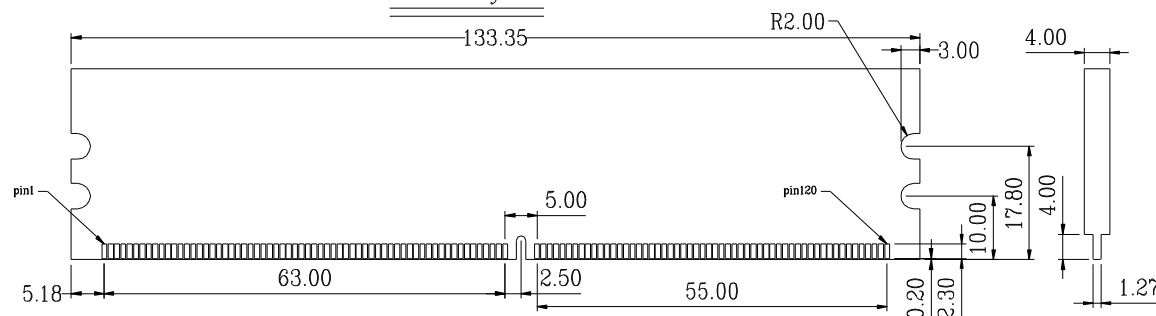

Recommended Module Layout

## MATERIALS

- \* Body : Liquid Crystal Polstal (L.C.P.) UL (94V-0)
- \* Contact : Copper alloy
- \* Contact plated : gold over niket (40-60u")or tin plating
- \* Latch : Nylon 66 UL (94 V-0)

## SPECIFICATION

- \* Contact curret rating : 1 AMP
- \* Conact resistance : 30 Milli OHMS Max.
- \* Insulation resistance : 5000 megohms Min. initial
- \* Operating temperature : -55°C to +105°C
- \* Dielectric Withstanding Voltage : 1.0KVAC
- \* Capacitance : 1pf Max.
- \* Durability : 25 cycle Min.
- \* Conact engaging force : 110 g Max. per conact,initial
- \* Contact separating force : 40 g Min. per contact,initial

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.35

.XX ± 0.25

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DIM1-AZ-240V1816R-LF

SERIES

CLIP

240

WAY

1.8V

REVERSED

ROW 1.6mm

LEADFREE

SLANT DIP

DESCRIPTION: DDR2 socket 240p lowprofile 25° Reverse