

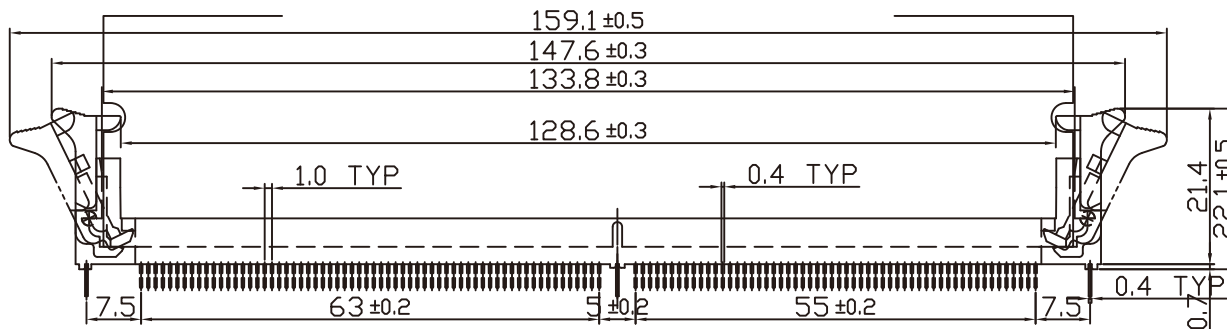


NOTE:
 MATERIAL:
 HOUSING:THERMOPLASTIC;(NY66+30%G/F)
 CONTACT:BRASS
 PLATING:
 CONTACT: GOLD PLATING
 SPECIFICATION:
 VOLTAGE RATING: 30V
 CURRENT RATING: 0.5A
 CONTACT RESISTANCE TERMINAL:40mΩ MAX
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC
 INSULATION RESISTANCE:1000MΩ MIN

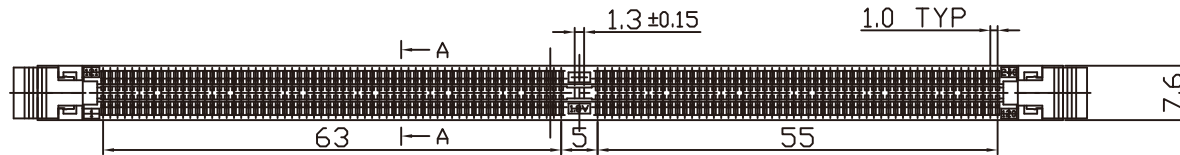

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE

SIZE A4

SCALE 1 : 1

PPOJECTION

TOLERANCES ARE


X. ±

.X ±

.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

DIM1-E-240V18-LF

SERIES

LEADFREE

1.8V

240 WAY

EDGE CLIP

DESCRIPTION: