
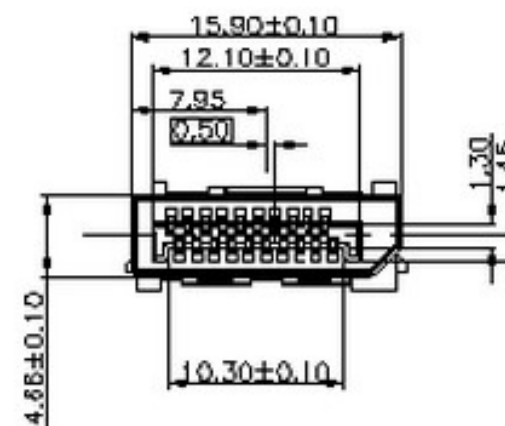
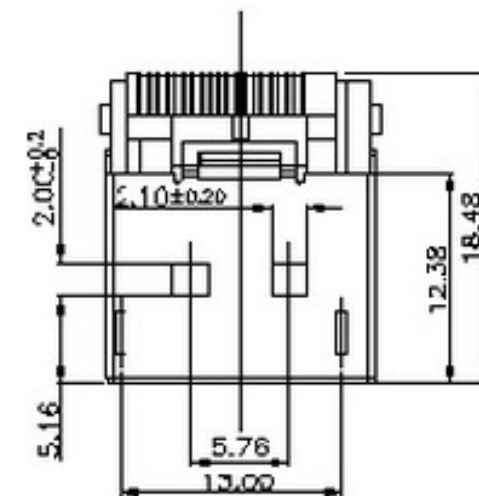


材質
 膠芯材質 LCT+30%GF
 端子材質 C5191-EH
 電氣性能
 額定電流 0.5A min
 接觸阻抗 30 mohms
 絕緣阻抗 100 mohms
 機械性能
 插拔壽命 10,000 Cycles
 總插入力 44.1N
 總拔出力 9.8N min , 39.2 N max
 保持力
 操作溫度 -20 degree C to +85 degree C

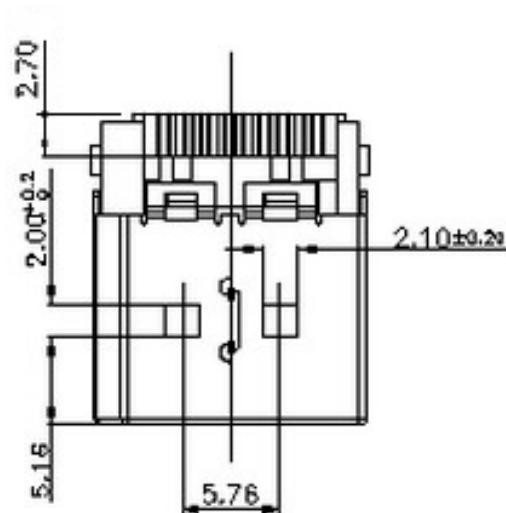

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE


X, ±

.X ±

.XX ±

.XXX ±

ANG ±

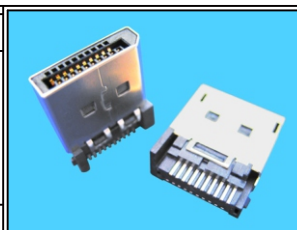

ORDER INFORMATION

DISP-PS-20-LF

SERIES | LEADFREE
 20 WAY
 SOLDER
 MALE

DESCRIPTION: