
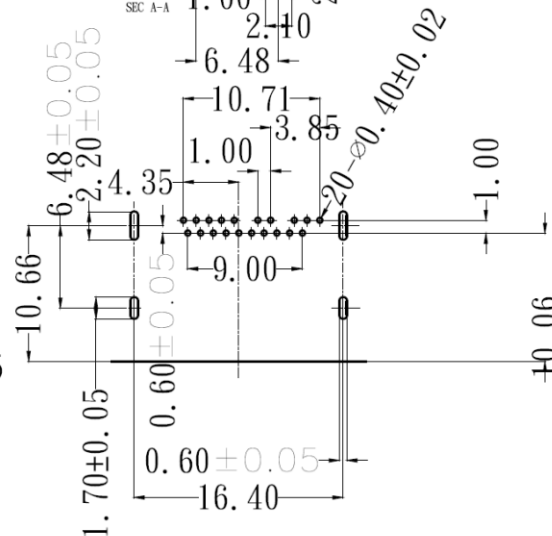


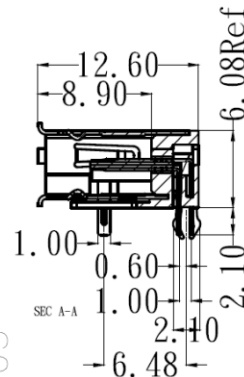
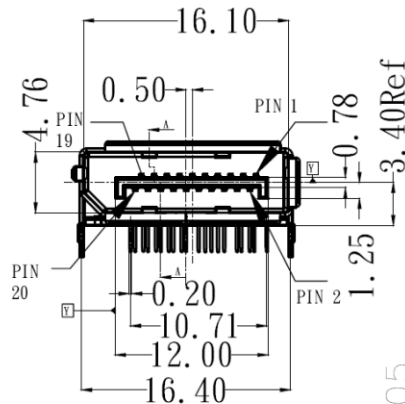





NOTE:

*Material

Body: LCP, UL 94V-0 Rated; Color: Black.
Shield: Brass.
Plating: Nickle Plating.
Contact: Brass.
Plating: Tin Plating On Solder.
Gold Plating Over Nickel On Contact Area.

*Electrical Specification

Operation Voltage : 40 VAC max.
Current Rating : 0.5 Ampere per contact.
Contact Resistance : 30 Miliohms max.
Insulation Resistance : 100 Megohms Min.
Dielectric Withstanding Voltage : 500 VAC.

*Environmental

Operating Temperature: -20° to +85°.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

DISP-SRMZ-20-LF
SERIES T T T T LEADFREE
CLIP
METAL
DIP 90°
FEMALE
20 WAY

DESCRIPTION: