

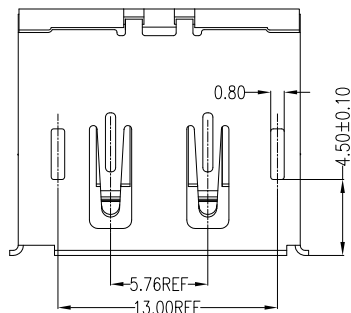

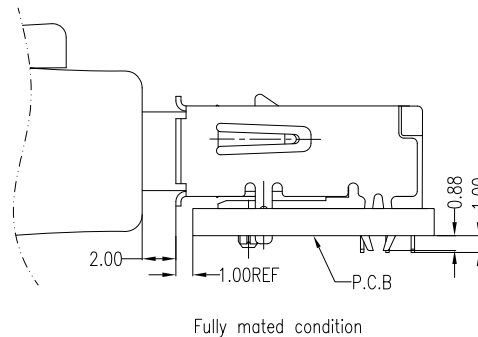




Detail: B
Scale 2:1

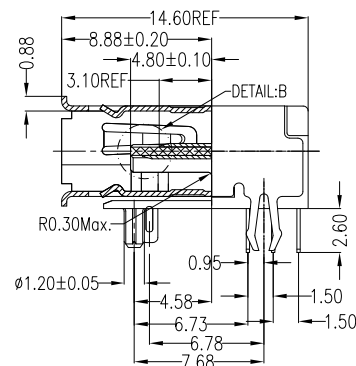

Detail: C
Scale 10:1

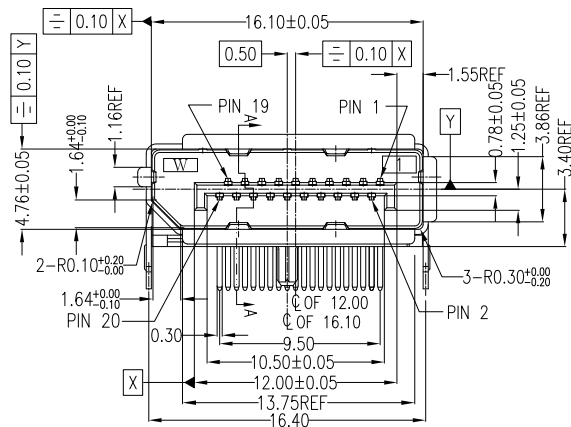

Fully mated condition

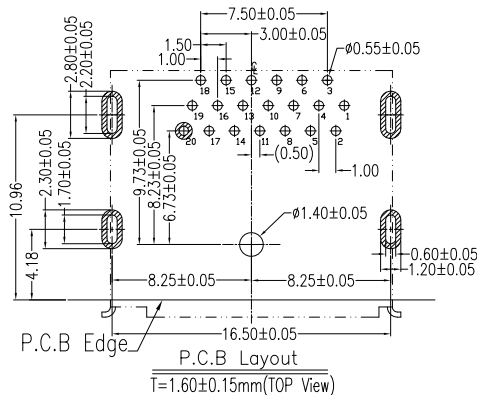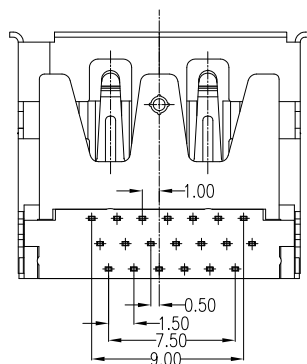

P.C.B. Edge

P.C.B. Layout

T=1.60±0.15mm(TOP View)

NOTES:

*Material


Body: LCP, UL 94V-0 Rated; Color: Black.
Shield: Brass.
Plating: Ni(40u" Min.) Plating.
Contact: Brass.
Plating: Au plating on contact area;
Sn(100u" Min.) plating on solder tail;
Ni(40u" Min.) underplating overall.

*Electrical Specification

Operation Voltage: 40 VAC max.
Current Rating: 0.5 Ampere per contact
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 100 Megohms min.
Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -20°C to +85°C

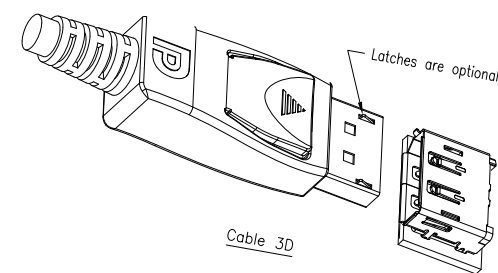

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DISP-SRMZP-20-LF
SERIES T T T T LEADFREE
FEMALE METAL DIP 90°
CLIP POST 20 WAY

DESCRIPTION: DisplayPort External DIP Type Male Three Row Connector

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°