
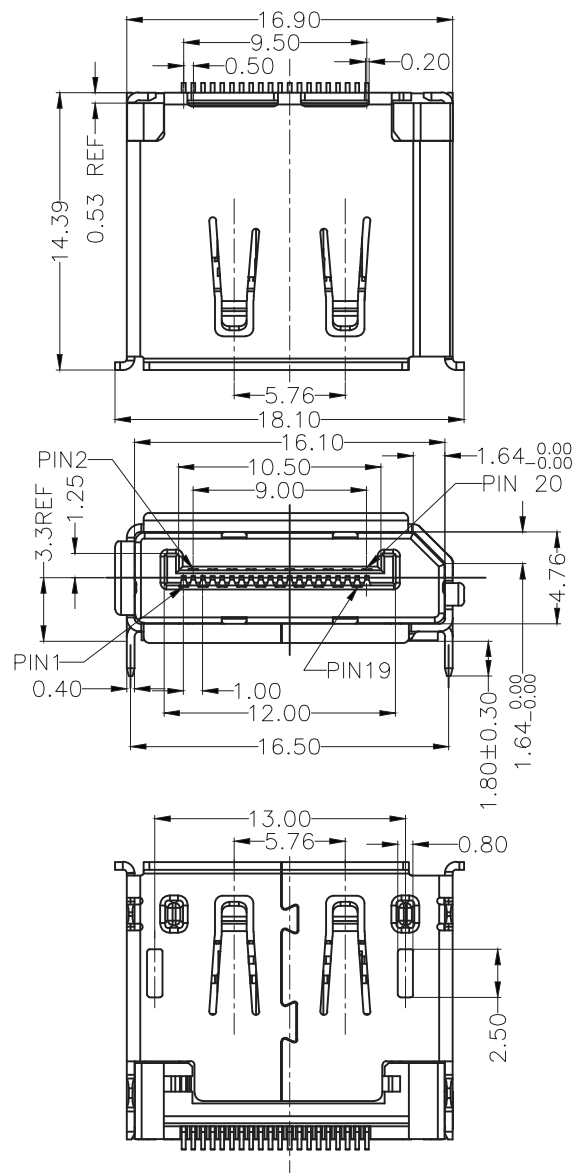


3D VIEW

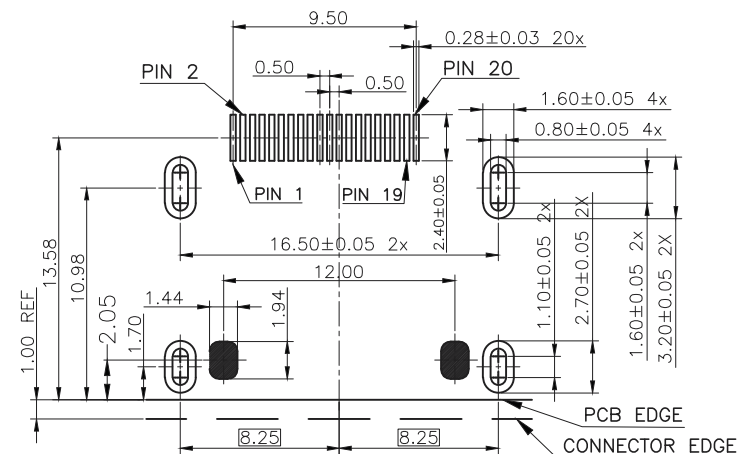

RECOMMENDED P.C.B. LAYOUT (THICKNESS=1.60mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

NOTE:

1. MECHANICAL:

- 1.1 INSERTION FORCE: 4.5Kgf MAX
- 1.2 WITHDRAW FORCE: 1Kgf-4Kgf

2. ELECTRICAL:

- 2.1 CONTACT CURRENT RATING: 0.5A MAX
- 2.2 VOLTAGE RATING: 40V AC (RMS)
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500 V AC FOR 1 MINUTE
- 2.4 INSULATION RESISTANCE: 100 MEGAOHMS MIN
- 2.5 CONTACT RESISTANCE: 30 MILLIOHMS MAX

3. ENVIRONMENTAL:

- 3.1 OPERATING TEMPERATURE: -25~+85°C
- 3.2 SALT SPRAY: 48H

PART NO.:		HOUSING BLACK LCP, CONTACT & SHELL BRASS, TAPE REEL PACKING			
20	C2680 T: 0.20mm	CONTACT AREA: GOLD FLASH, SOLDER TAIL: MATTED TIN	CONTACT	③	
1	LCP E130I UL94V-0	COLOR: BLACK	HOUSING	②	
1	C2680 T: 0.4mm	PLATED: NICKEL OVER ALL	SHELL	①	
QTY'S	SPECIFICATION	FINISHING	PART	ITEM	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG $\pm 5^\circ$

照片框

ORDER INFORMATION

DISP-SWVM-20-LF

SERIES
LEADFREE
20 WAY
METAL FOOT
REVERSED
90°SMT
FEMALE

DESCRIPTION: