


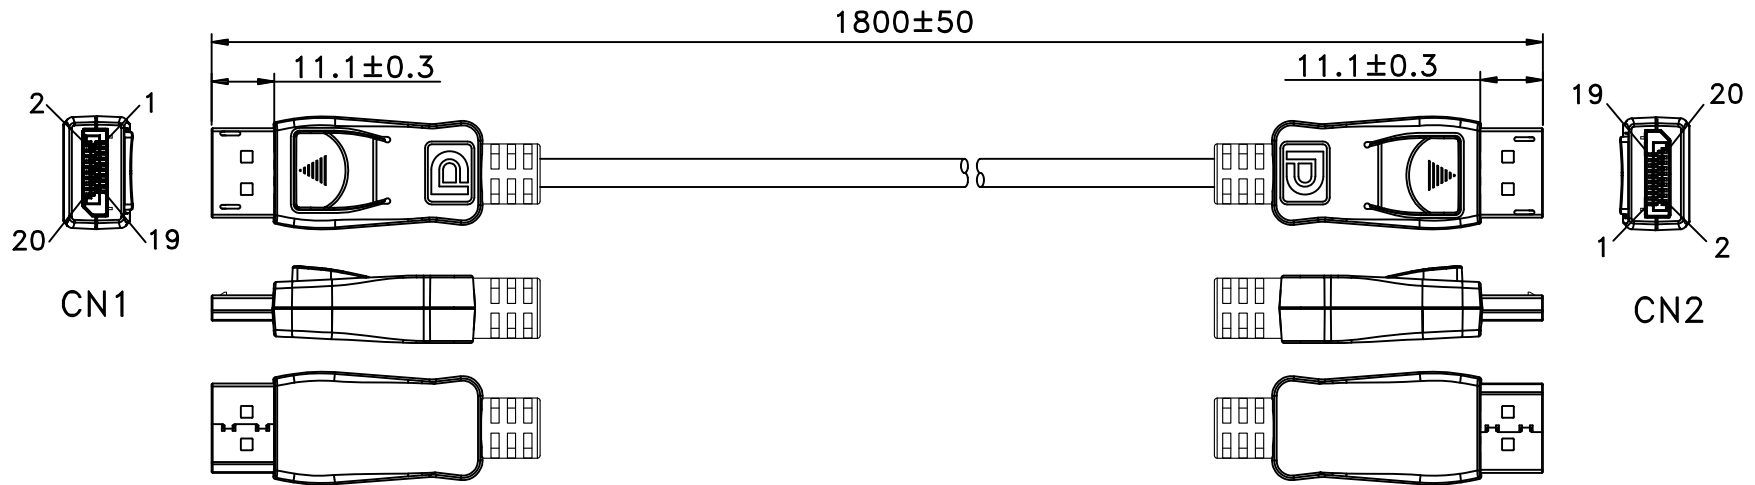

***CONSTRUCTION:

1.CABLE:

* UL20276 (30#/1PR+EAM)*5+30#/5C+AEB(AL)85%
OD:6.5mm BLACK PVC JACKET.

***CONNECTORS:

2.DISPLAYPORT
20P/M:

* DISPLAY PORT 20PIN MALE INSULATOR BLACK.
* PINS: PHOSPHOR BRONZE WITH 1u GOLD PLATED.
* INSULATOR: BLACK COLOR P.B.T UL 94V-0 RATED.
* SHELL: NICKEL PLATED SHELL.
* HOOD: BLACK COLOR ABS ASSEMBLY TYPE.

3.SR:

* MOLDED 45P PVC BLACK COLOR.

4.TEST:

* CT: 3 ohm IS: 10M ohm.

5.PACKING:

* PACK EACH CABLE IN A POLY BAG.

6.MATERIAL:

* MATERIAL WITH RoHS GRADE.

PIN OUT

CN1	CN2	CN1	CN2
1 BLUE	12	13 YELLOW	13
3 WHITE	10	14 WHITE	14
2 DRAIN	11	15 WHITE	15
4 BLUE	9	17 GRAY	17
6 WHITE	7	16 DRAIN	16
5 DRAIN	8	18 GREEN	18
7 BLUE	6	19 RED	19
9 WHITE	4	20 VIOLET	20
8 DRAIN	5	SHELL BRAID	SHELL
10 BLUE	3		
12 WHITE	1		
11 DRAIN	2		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DISPX2-202030-M1M8-LF

SERIES

LEADFREE

1800mm

MALE TO MALE

30 AWG

20 TO 20 WAY

DESCRIPTION: DISPLAYPORT 20PIN MALE TO MALE CABLE