
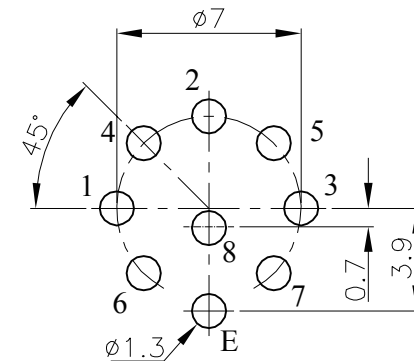
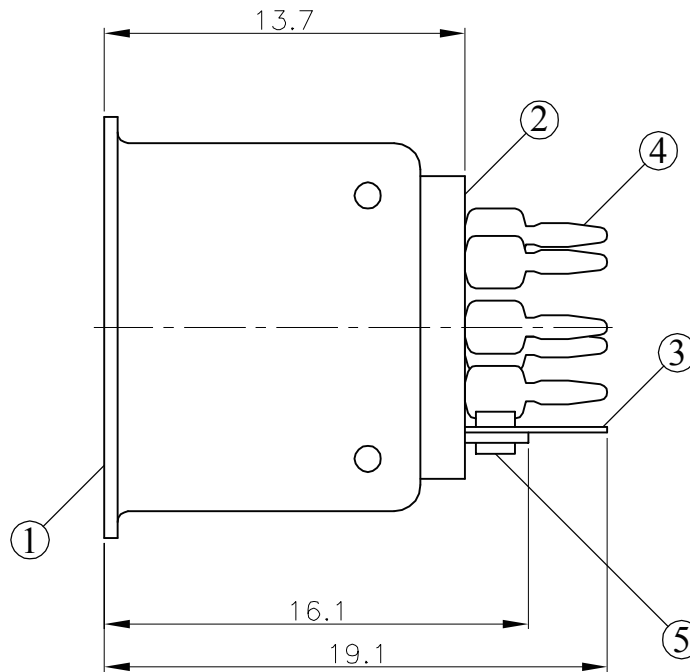


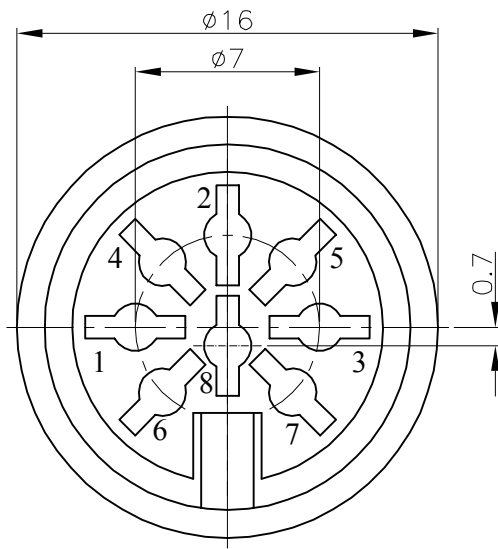

PCB LAYOUT
(TOP VIEW)

ARRANGEMENT OF CONTACTS				
MODEL NO.	DJ-D-04	DJ-D-06	DJ-D-07	DJ-D-08
HOLE LAYOUT				

5.	RIVET	1	AL	NICKEL PLATED	
4.	CONTACT TERMINAL	8	BRASS 0.7t	TIN	
3.	EARTH TERMINAL	1	PBSR-H 0.25t	TIN	
2.	INSULATOR	1	P.B.T.		UL94V-0
1.	SOCKET CASE	1	SPCC-SD 0.4t	NICKEL PLATED	
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

- SPECIFICATIONS:
1. CONTACT RESISTANCE : 20m OHM MAX.
 2. INSULATION RESISTANCE : 300M OHM MIN. AT DC 500V.
 3. VOLTAGE WITHSTANDING : AC 1000V FOR ONE MINUTE.
 4. INSERTION FORCE : 4.0KG MAX.
 5. WITHDRAWAL FORCE : 1 - 3.5KG.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DJ-D07-xx-LF
SERIES | 04~08WAY | LEADFREE
DIP 180° | PCB LAYOUT 7.0mm

DESCRIPTION: