
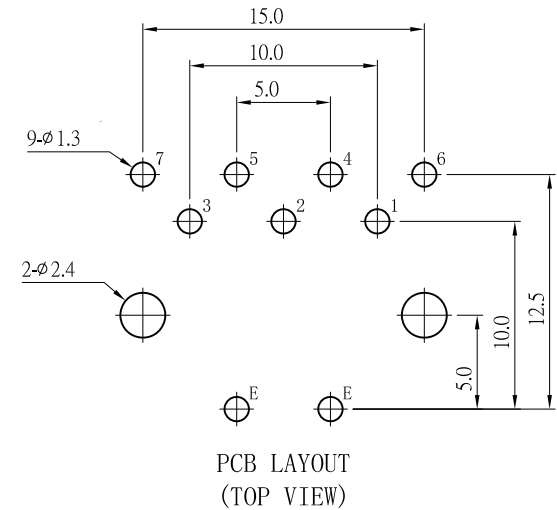
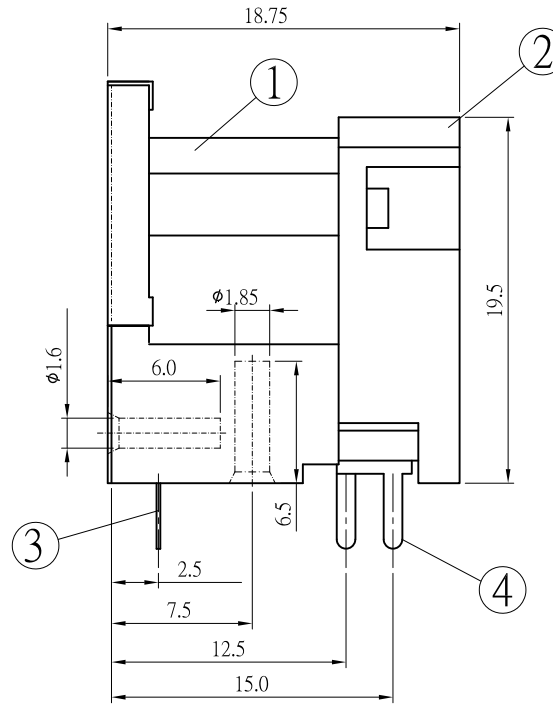


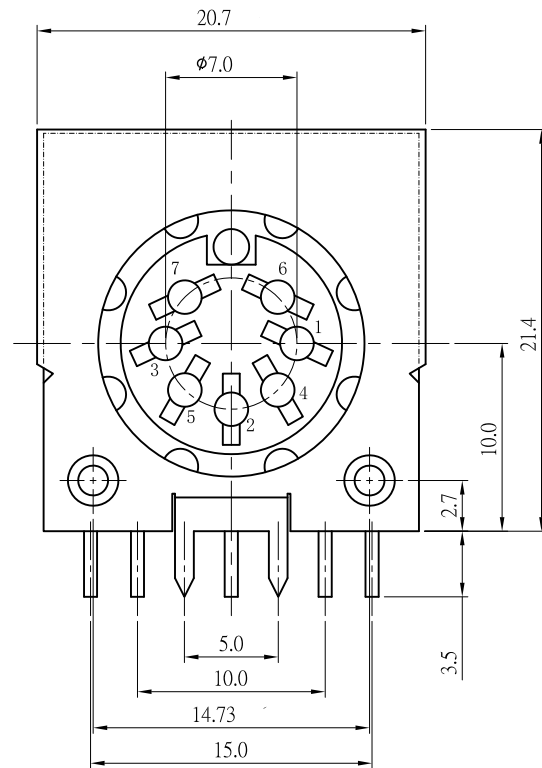

SPECIFICATIONS :

1. CONTACT RESISTANCE : 20m OHM MAX.
2. INSULATION RESISTANCE : DC 500V 100M OHM MIN.
3. VOLTAGE WITHSTANDING : AC 500V 1 MINUTE.
4. INSERTION FORCE : 5.0 KG MAX.
5. WITHDRAWAL FORCE : 1 -3.5 KG.
6. LIFE TEST : 5,000 CYCLES MIN. AFTER TESTING ,
CONTACT RESISTANCE SHALL NOT EXCEED 100m OHM.
7. CURRENT RATING : AC : 100V 2A. DC : 24V 1A.
8. OPERATING TEMPERATURE : - 40° C ~ +85° C.
9. UNLESS OTHER SPECIFIED, TOLERANCE IS $\pm 0.3\text{mm}$.

P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS
4	CONTACTOR	8	BSR 0.7t	TIN	
3	SHIELDED TERMINAL	1	BSR 0.2t	NICKEL	
2	COVER	1	P. B. T.		UL94V-0
1	BODY	1	P. B. T.		UL94V-0
TOLERANCES		APPROVAL BY	CHECKED BY	DRAWD BY	UNITS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DJ-M5-07-LF
SERIES | LEADFREE
7P
5.0mm
METAL

DESCRIPTION: