
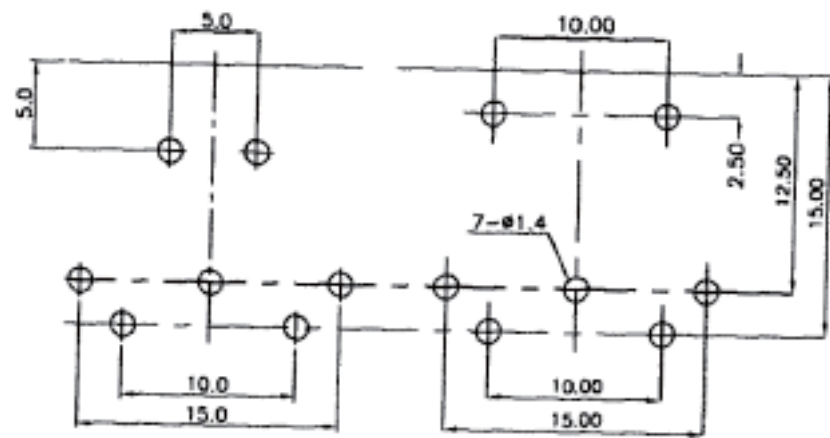
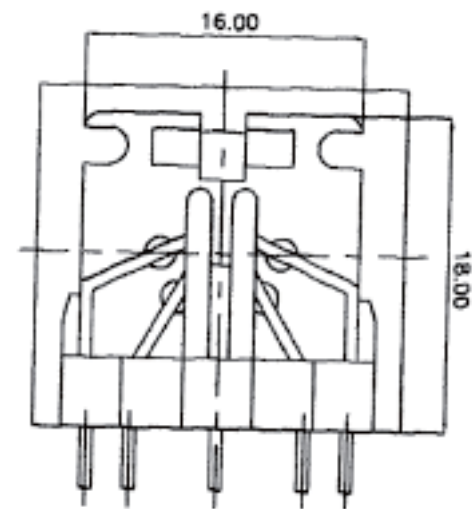
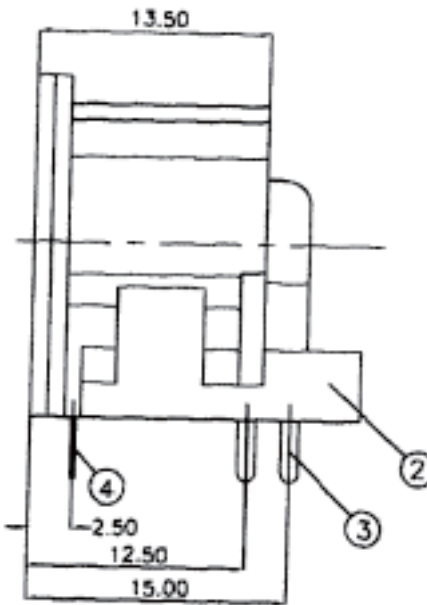


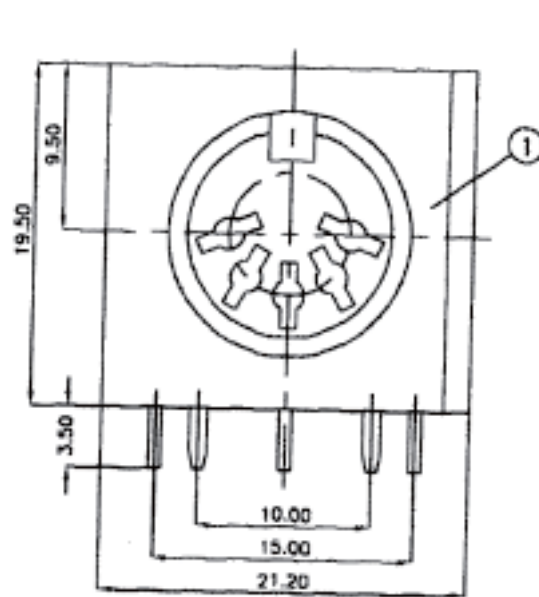

Type B

PCB LAYOUT

Type A

PCB LAYOUT

SPECIFICATIONS:

1. CONTACT RESISTANCE : 20m OHM.
2. INSULATION RESISTANCE : DC 500V 100M OHM MIN.
3. VOLTAGE WITHSTANDING : AC 500V 1 MINUTE.
4. INSERTION FORCE : 4KG MAX.
5. WITHDRAWAL FORCE : 1 - 3.5 KG.
6. LIFE TEST : 5,000 CYCLES MIN. AFTER TESTING , CONTACT RESISTANCE SHALL NOT EXCEED 100m OHM.
7. CURRENT RATING : AC : 100V 2A.
DC : 24V 1A.

4.	EARTH TERMINAL	1	PHSR 0.25t	TIN	
3.	CONTACT TERMINAL	8	BSR-H/2 0.7t	TIN	
2.	COVER	1	P.B.T.		UL94V-0
1.	BODY	1	P.B.T.		UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DJ-SQx-05-LF
SERIES 05 WAY LEADFREE
BLANK: METAL FOOT 10.0mm
5: METAL FOOT 5.0mm
SQUARE
ALL PLASTIC

DESCRIPTION: