


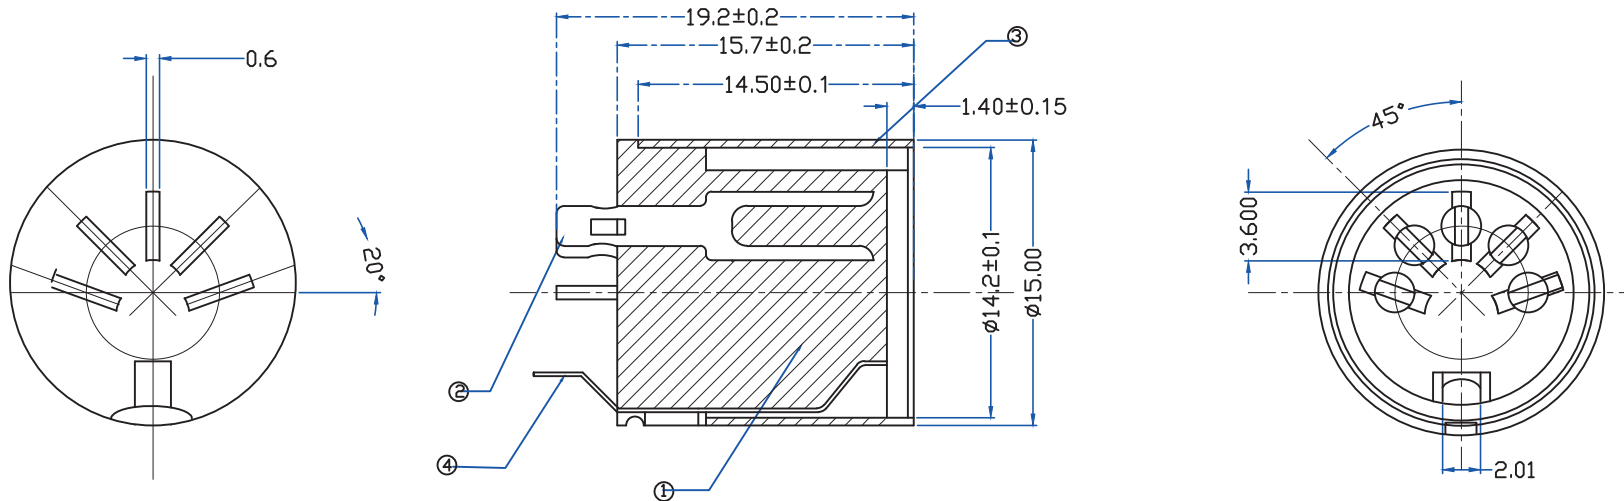

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 100V AC AT 1AMP MAX OR
12V DC AT 2AMPS MAX

Insulation Resistance: 50 Megohms Minimum at DC 250V
Dielectric Strength: 250V AC/1 MINUTE

MECHANICAL CHARACTERISTICS:

Contact Insertion Force: 4.5Kg Maximum
Contact Separation Force: 0.9Kg Minimum

MATERIALS:

Contacts: Brass

Insulator: PBT, UL 94V-0 Rated

Shell: Brass

FINISHES:

Contact: Nickel Plated.

Shell: Nickel Plated.

HOUSING MATERIAL

- 1: LCP (WHITE)
- 2: LCP (BLACK)
- 3: NYLON 6T (WHITE)
- 4: NYLON 6T (BLACK)
- 5: PBT (WHITE)
- 6: PBT (BLACK)

SHELL MATERIAL

- 1: SPCC
- 2: BRASS

TERMINAL CONTACT PLATING

- 1: Sn 120U"
- 2: Ni 120U"

TERMINAL MATERIAL

- 1: PHOSPHOR BRONZE
- 2: BRASS

4	彈片	磷銅 t=0.20	鍍 Sn 120U"	1
3	銅管	黃銅 t=0.40	鍍 Ni 120U"	1
2	端子	黃銅 t=0.60	鍍 Sn 120U"	5
1	膠芯	PBT+30%, UL94V0	BLACK	1
NO.	PART NAME	MATERIAL	FINISH	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PROJECTION

X, ± 0.20
X, ± 0.10
.XX ± 0.05
.XXX ±
ANG ± 1°

照片框

ORDER INFORMATION

DM-S-05-LF
SERIES T LEADFREE
05 WAY
FEMALE

DESCRIPTION: