


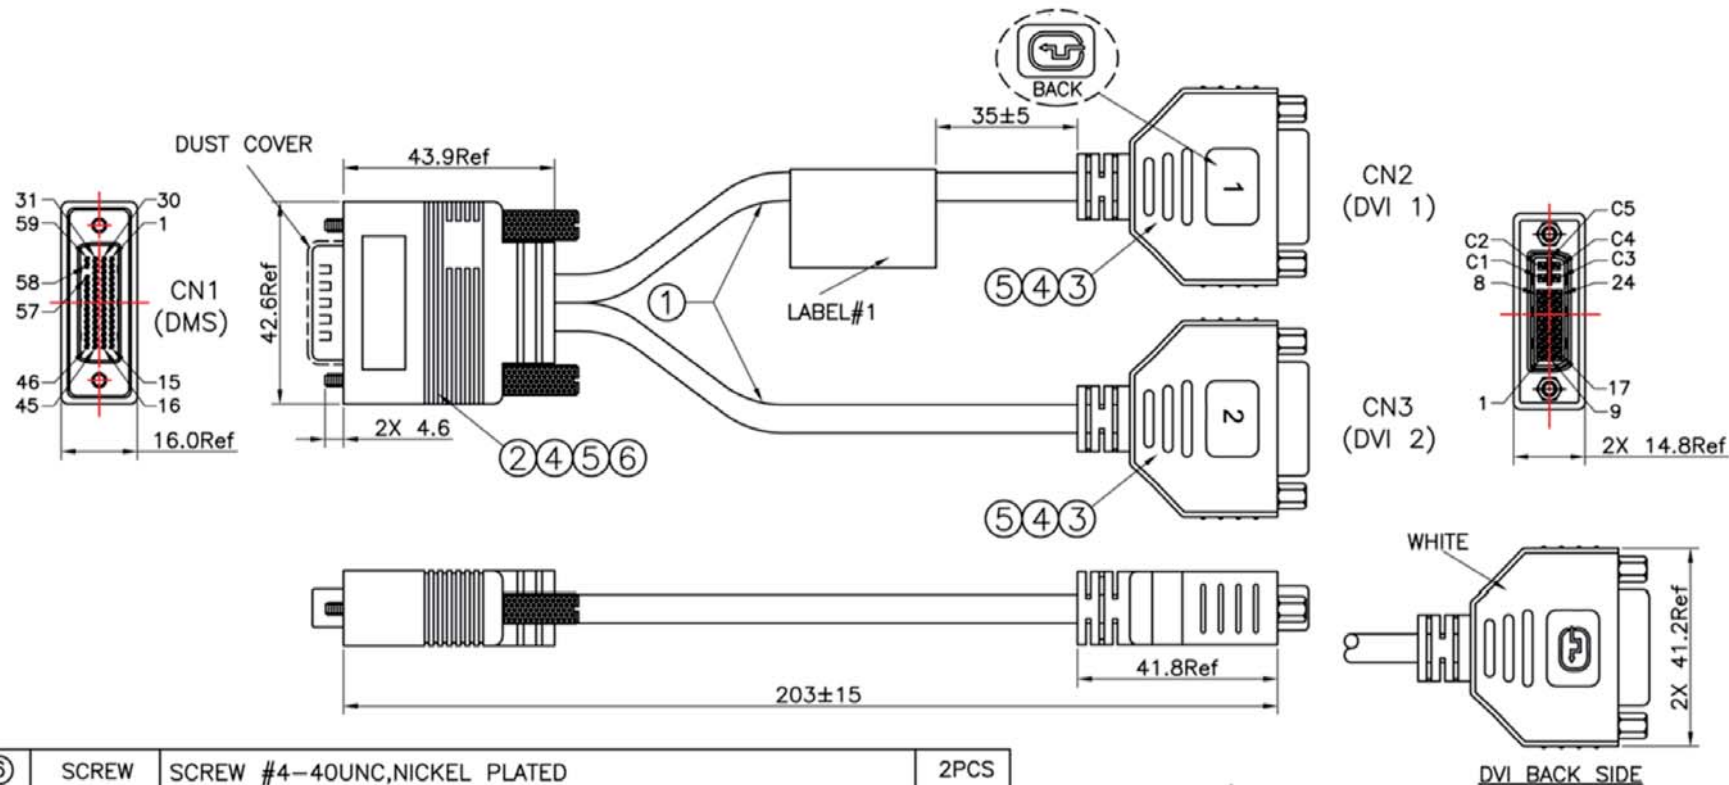

⑥	SCREW	SCREW #4-40UNC,NICKEL PLATED	2PCS
⑤	PVC	MOLDED 45 PVC WHITE(S911)	3PCS
④	LD-PE	MOLDED LD-PE	3PCS
③	CONN	DVI24+5/F ,CONTACT GOLD FLASH, INSULATOR WHITE	1PCS
		,FRONT SHELL NICKEL PLATED BACK SHELL TIN PLATED,	
		HEX NUT #4-40UNC NICKEL PLATED	
②	CONN	DMS 59P/M,CONTACT GOLD FLASH INSULATOR BLACK.	1PCS
		FRONT SHELL NICKEL PLATED BACK SHELL TIN PLATED	
①	CABLE	UL20276 [(30AWG*1P+D+FAM,100±10 OHM)*4+(30AWG*1COAX+SPIRAL,75±5 OHM)*3	2PCS
		+30AWG*1P+30AWG*6C] ,AL/MYLAR+BRAID 95%,JACKET O.D:7.0MM,COLOR:BLACK	
ITEM	NAME	DESCRIPTION	Q'TY

NOTES:

1. MUST BE FULLY 360° SOLDER WITH 2 LAYER COPPER FOIL FOR DVI AND DMS CONNECTORS AFTER INNER MOLDING.
2. THIS COMPONENT AND ITS HOMOGENEOUS SUBCOMPONENTS ARE ROHS COMPLIANT.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DMSDVIX12-592930-E8N-LF

SERIES

LEADFREE

203mm

MALE TO FEMALE

30 AWG

59 TO 29 PIN

DESCRIPTION: DMS 59P/M TO DVI 24+5/F *2 CABLE L=203MM