


Features:

- 2 ~ 4 circuits available
- Plastic: UL 94V-2 nylon 66
- Pin: Tin-plated phosphor bronze, 0.25mm thickness

Specification:

- Current rating: 6.5A
- Voltage rating: 250V AC (R.M.S.)
- Contact resistance: 10mΩ Max.
- Insulation resistance: 500MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

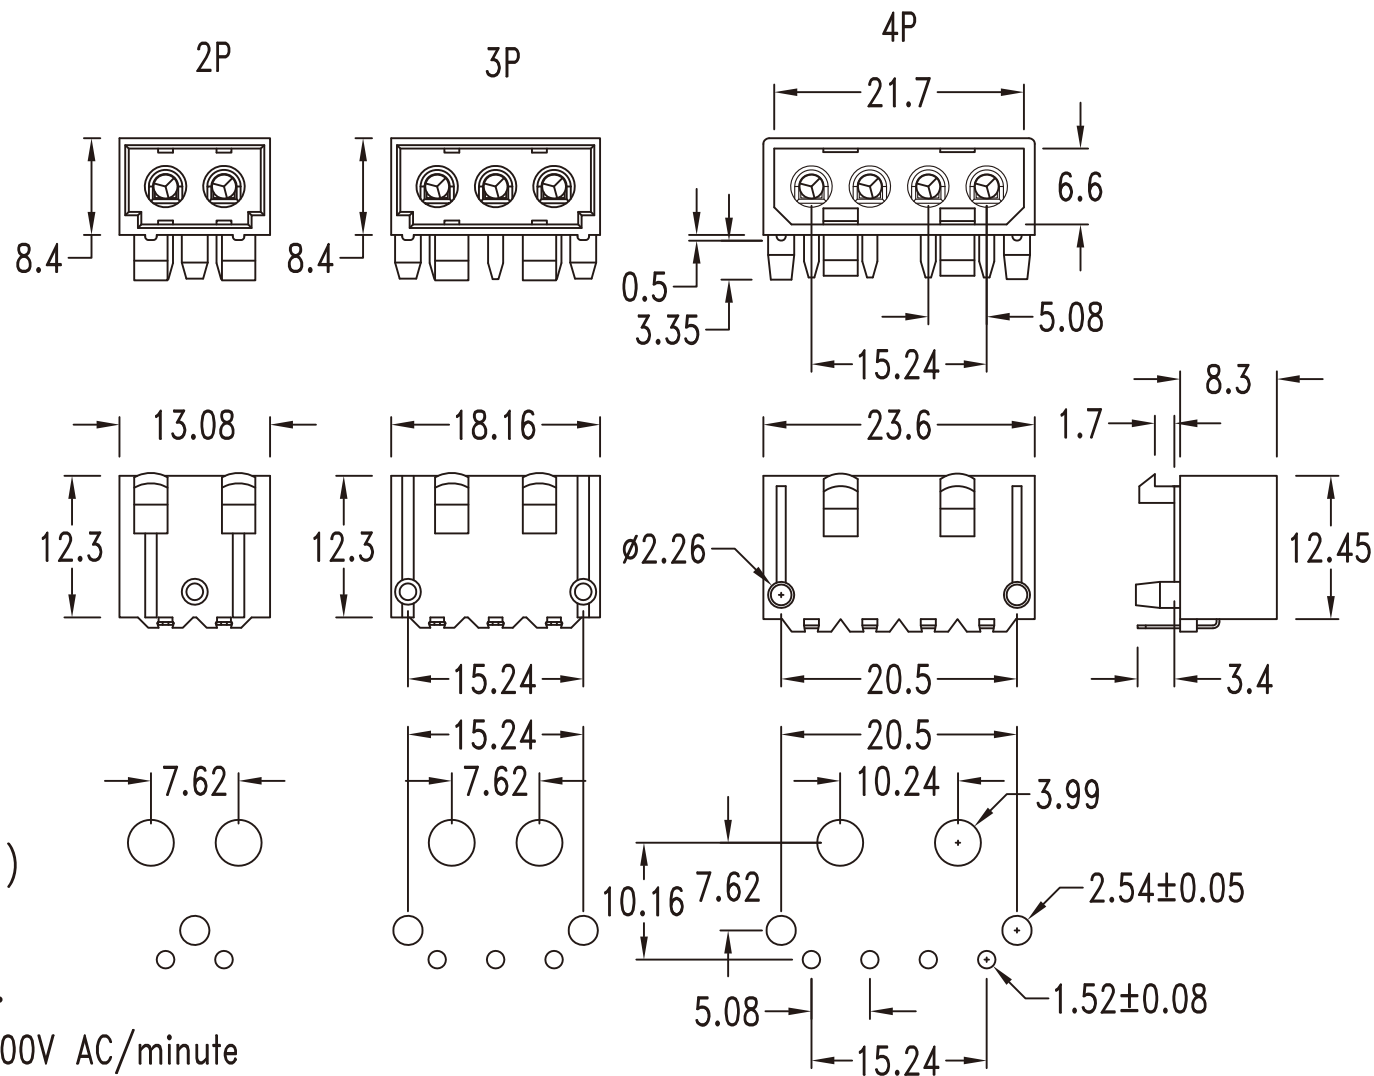

P. C. board hole dimensions

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

DP-PR-xx-LF
SERIES LEADFREE
02.03.04WAY
DIP 90°
MALE

DESCRIPTION: (5.08mm) Right Angle Header