

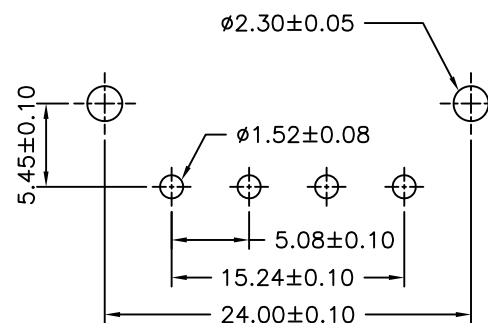



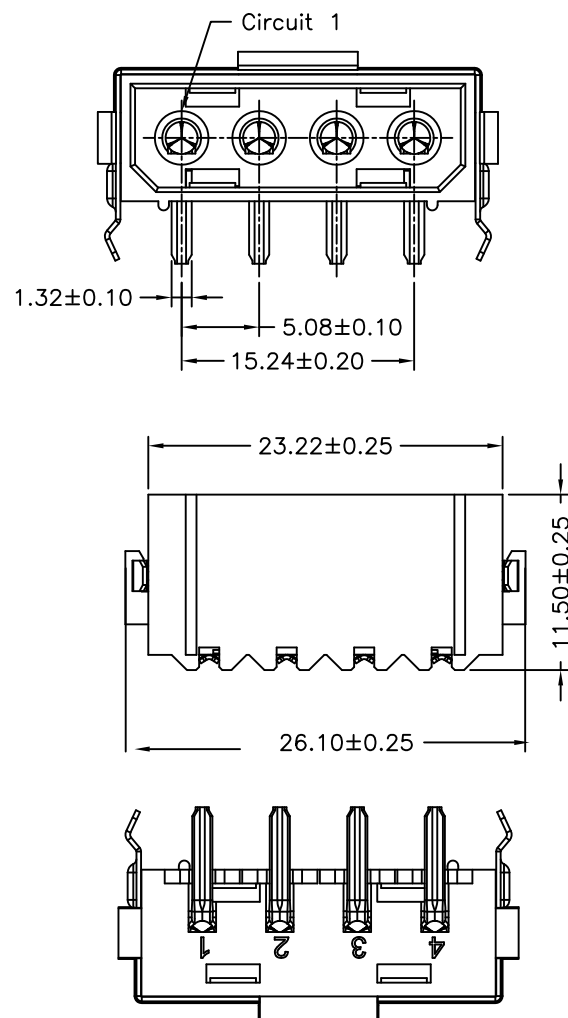

P.C.B. LAYOUT



SPECIFICATIONS

Current Rating: 10A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Metal Band: Brass/Tin-plated
Material: Nylon 6T,UL94V-0
Color: (Black)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
X ± 0.30
XX ± 0.20
XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DP-PRMBK-04-LF
SERIES | | | | LEADFREE
| | | | 04WAY
| | | | BLACK
| | | | METAL
| | | | DIP 90°
| | | | MALE

DESCRIPTION: 5.08mm PITCH 90° WAFER