



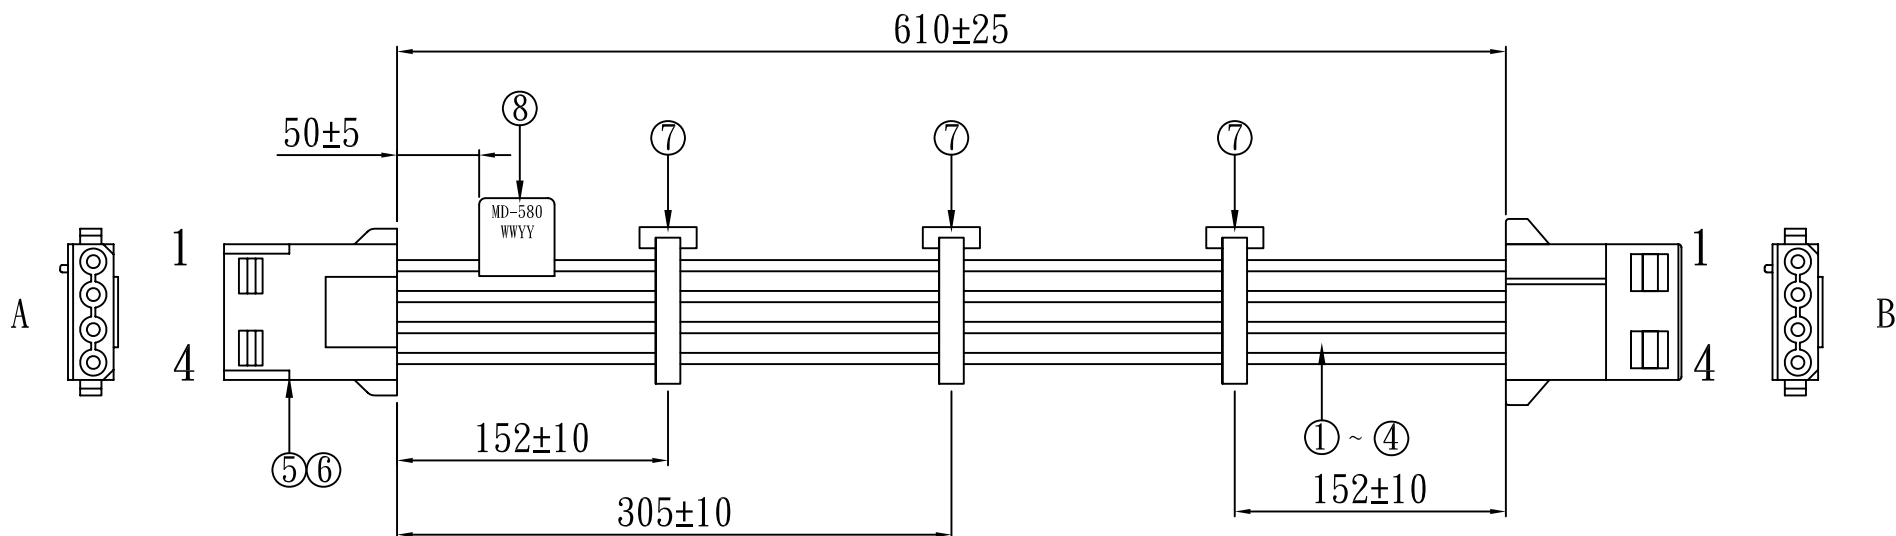

A	線色	B
1	紅	1
2	黑	2
3	綠	3
4	黃	4

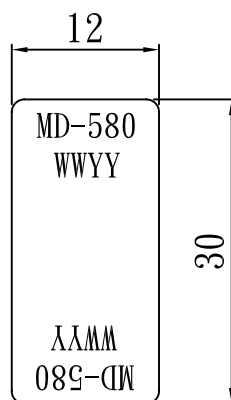

WW: 周期
YY: 年度

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL1007 #18 紅	1PCS	E108485
2	WIRE:	UL1007 #18 黑	1PCS	E108485
3	WIRE:	UL1007 #18 綠	1PCS	E108485
4	WIRE:	UL1007 #18 藍	1PCS	E108485
5	HOUSING:	C5082H02-4P	2PCS	E144544
6	TERMINAL:	C5082TOB-2	8PCS	E144544
7	束線帶:	自然色 2.5*100mm	3PCS	
8	標籤:	規格與內容如圖所示	1PCS	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DPX2-040418T6N-F24N-LF

SERIES

LEADFREE

610mm

FEMALE TO FEMALE

CABLE TIE 6"

18 AWG
4 PIN TO 4 PIN

DESCRIPTION: