

Note:


No.	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

ELECTRICAL CHARACTERISTICS


Contact Current Rating: 3Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000Megohms Min.
 Contact Resistance: 30Milliohms Max.
 Operation Temperature : -55°C to +105°C.

Material


Contact : Copper Alloy.
 Insulator: PBT. (Select PA6T /LCP /PA9T)
 Shell: SPCC.
 Z-Piece: Copper Alloy.
 Screw: Copper Alloy.
 Rivet: Copper Alloy, or Zinc.

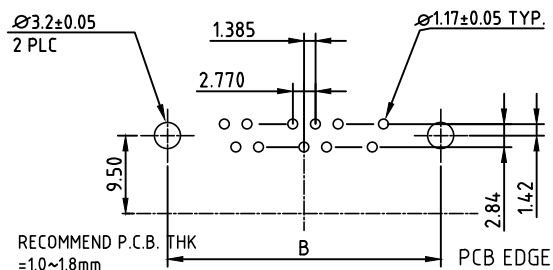


STANDARD




J



NJ



NH



照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.25
 .XXX ± 0.15
 ANG ± 2°

ORDER INFORMATION

DR-PSxx-xx-LF
 SERIES T LEADFREE
 09-37WAY
 BLANK: STANDARD
 J: JACKSCREW
 NJ: NUT+JACKSCREW
 NH: NUT+HEX SCREW
 MALE
 HALF GOLD

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com