


Note:

No.	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

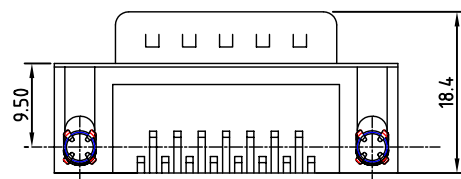


ELECTRICAL CHARACTERISTICS


Contact Current Rating:3Amperes.
Dielectric Withstanding Voltage:AC 500V at sea level.
Insulation Resistance:1000Megohms Min.
Contact Resistance:30Milliohms Max.
Operation Temperature : -55°C to +105°C.

Material


Contact :Copper Alloy.
Insulator:PBT. (Select PA6T /LCP /PA9T)
Shell: SPCC.
Z-Piece: Copper Alloy.
Screw: Copper Alloy.
Rivet: Copper Alloy. or Zinc.

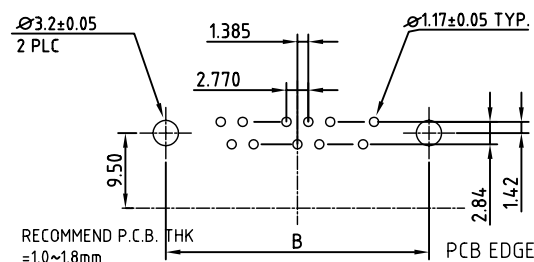


DR-PxZ4-xx




DR-PxZ4NJ-xx



DR-PxZ4N-xx



DR-PxZ4NH-xx



照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

ORDER INFORMATION

DR-PxZ4xx-xx-LF

SERIES MALE LEADFREE
09~37WAY
N:NUT
NJ:NUT+JACKSCREW
NH:NUT+HEX SCREW
CLIP TYPE 4
G: GOLD
S:SEMI GOLD

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com